


Luminaire

Code BB10400_25+M239200
Name LUCERI Q TLESS 25W 940 COMFORT + schermo trasparente


Measurem.

Code FTS1801244-A
Name LUCERI Q TLESS 25W 940 COMFORT + schermo trasparente

Luminaire Flux	2294 lm	Luminaire Power	25.0 W	Efficacy	91.760 lm/W	Efficiency	100.00%
Source Flux	2294 lm	Maximum value	855.25 cd/klm	Position	C=10.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	188 mm	Width	188 mm	Height	238 mm
Rectangular Luminous Area		Length	184 mm	Width	184 mm	Height	0 mm
Horizontal Luminous Area		0.033856 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.008191 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		25-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2294 lm	
LED Flux=3454lm LED Power=25W Eff=66% EfcLed=138lm/W EfcLum=92lm/W CCT=4000K Ra=90 R9=50 SDCM=1 L70(9k)=50000h							
C.I.E.	79 94 99 100 100			D DIN 5040		A60	
F UTE	1.00 B			B NBN		BZ 1	

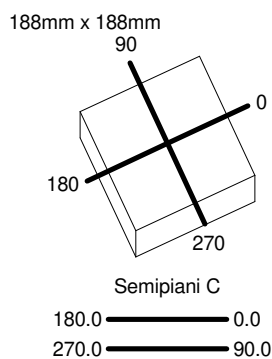

ULOR 0.03 %
DLOR 99.97 %
RN 0.03 %

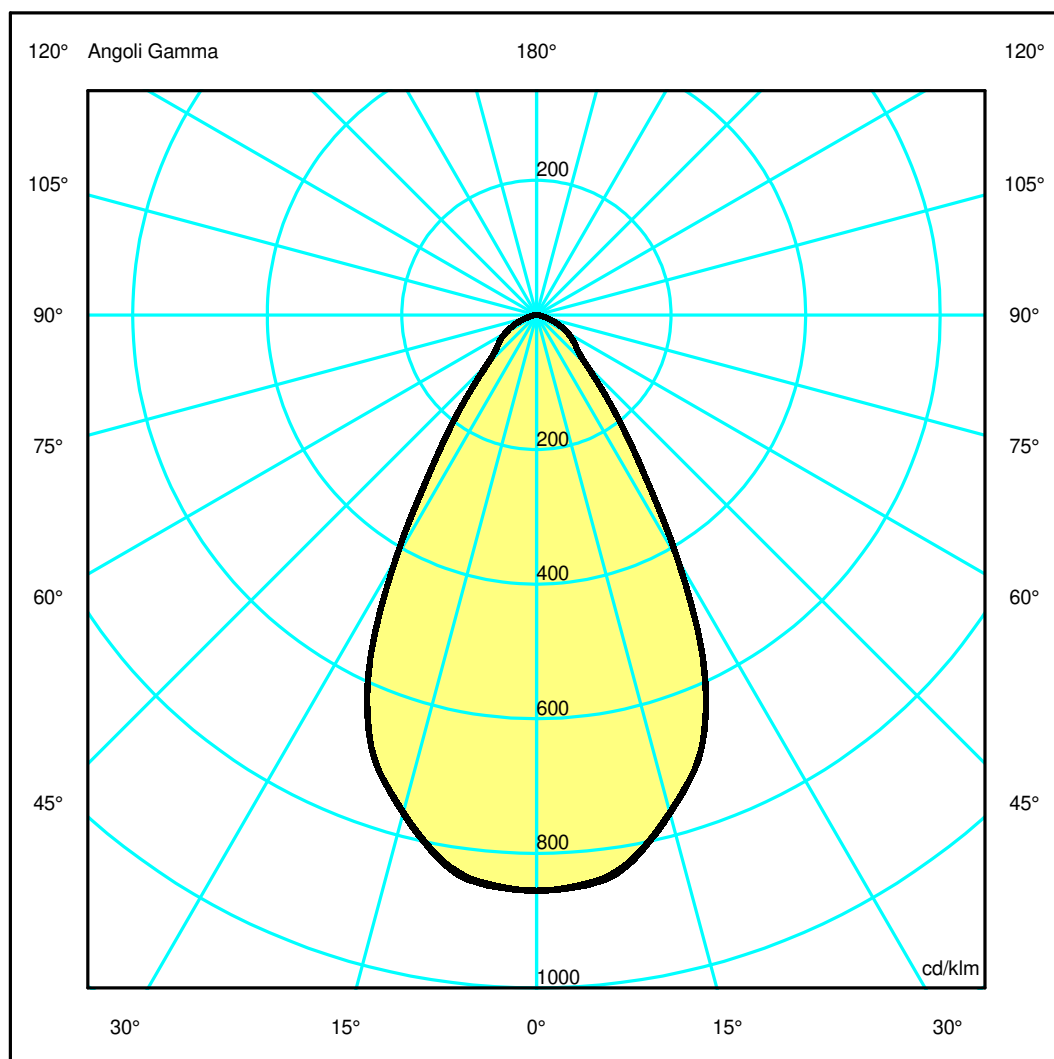

Luminaire

Code BB10400_25+M239200

Name LUCERI Q TLESS 25W 940 COMFORT + schermo trasparente

Measurem.

Code FTS1801244-A


Name LUCERI Q TLESS 25W 940 COMFORT + schermo trasparente

Luminaire Flux	2294 lm	Luminaire Power	25.0 W	Efficacy	91.760 lm/W	Efficiency	100.00%
Source Flux	2294 lm	Maximum value	855.25 cd/klm	Position	C=10.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	188 mm	Width	188 mm	Height	238 mm
Rectangular Luminous Area		Length	184 mm	Width	184 mm	Height	0 mm
Horizontal Luminous Area		0.033856 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.008191 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		25-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2294 lm	
LED Flux=3454lm LED Power=25W Eff=66% EfcLed=138lm/W EfcLum=92lm/W CCT=4000K Ra=90 R9=50 SDCM=1 L70(9k)=50000h							
C.I.E.	79 94 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.57	1.14	1.71	2.29	2.86	OC	0.57	1.14	1.72	2.29	2.86
OB	0.57	1.14	1.71	2.29	2.86	OD	0.57	1.14	1.72	2.29	2.86

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1961.24	1951.22	1757.10	1356.33	601.73	242.01	151.92	91.65	34.02	7.62
OB	1961.24	1951.22	1757.10	1356.33	601.73	242.01	151.92	91.65	34.02	7.62
OC	1961.24	1945.00	1755.48	1360.34	605.82	239.85	152.67	91.40	33.22	7.26
OD	1961.24	1945.00	1755.48	1360.34	605.82	239.85	152.67	91.40	33.22	7.26

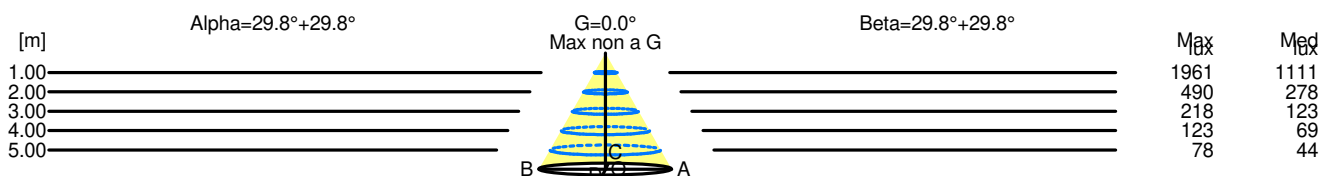

H[m]	D[m]	Max lux	Med lux	Alpha=29.8°+29.8°	G=0.0 Max non a G
1.00	1.14	1961	1111		
2.00	2.29	490	278		
3.00	3.43	218	123		
4.00	4.57	123	69		
5.00	5.72	78	44		

H[m]	D[m]	Max lux	Med lux	Beta=29.8°+29.8°	G=0.0 Max non a G
1.00	1.14	1961	1111		
2.00	2.29	490	278		
3.00	3.43	218	123		
4.00	4.58	123	69		
5.00	5.72	78	44		