

## Luminaire

Code CA31201+AP91400  
Name GOPLE 80 S / TRK16 48V 3000K WF BCO + VECTOR 55 - ANTI-DUZZLE LOUVRE

## Measurem.

Code FTS2200059-A  
Name GOPLE 80 S / TRK16 48V 3000K WF BCO + VECTOR 55 - ANTI-DUZZLE LOUVRE

|  |         |                 |                |                             |               |                 |                 |
|--|---------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux   | 1411 lm | Luminaire Power | 19.0 W         | Efficacy                    | 74.263 lm/W   | Efficiency      | 100.00%         |
| Source Flux  | 1411 lm | Maximum value   | 4326.59 cd/klm | Position                    | C=0.00 G=0.00 | CG              | Rotosymmetrical |
| Round Luminaire  |         | Diam.           | 77 mm          | Height                      | 150 mm        |                 |                 |
| Round Luminous Area  |         | Diam.           | 48 mm          | Height                      | 0 mm          |                 |                 |
| Horizontal Luminous Area   |         | 0.001810 m2     |                | Emitting area on Plane 180° |               | 0.000000 m2     |                 |
| Emitting area on Plane 0°  |         | 0.000000 m2     |                | Emitting area on Plane 270° |               | 0.000000 m2     |                 |
| Emitting area on Plane 90°   |         | 0.000000 m2     |                | Glare area at 76°           |               | 0.000438 m2     |                 |
| Coordinate system  |         | CG              |                | Symmetry Type               |               | Rotosymmetrical |                 |
| Date   |         | 08-01-2025      |                | Maximum Gamma Angle         |               | 180             |                 |
| Measurement Distance   |         | 0.00            |                | Measurement Flux            |               | 1411 lm         |                 |
| LED Flux=2584lm LED Power=18W Eff=55% EfcLed=147lm/W EfcLum=74lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6k)=33000h |         |                 |                |                             |               |                 |                 |
| C.I.E.   | 100     | 100             | 100            | 100                         | 100           | D DIN 5040      | A60             |
| F UTE  | --      |                 |                |                             |               | B NBN           | BZ 1            |

Diam=77mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

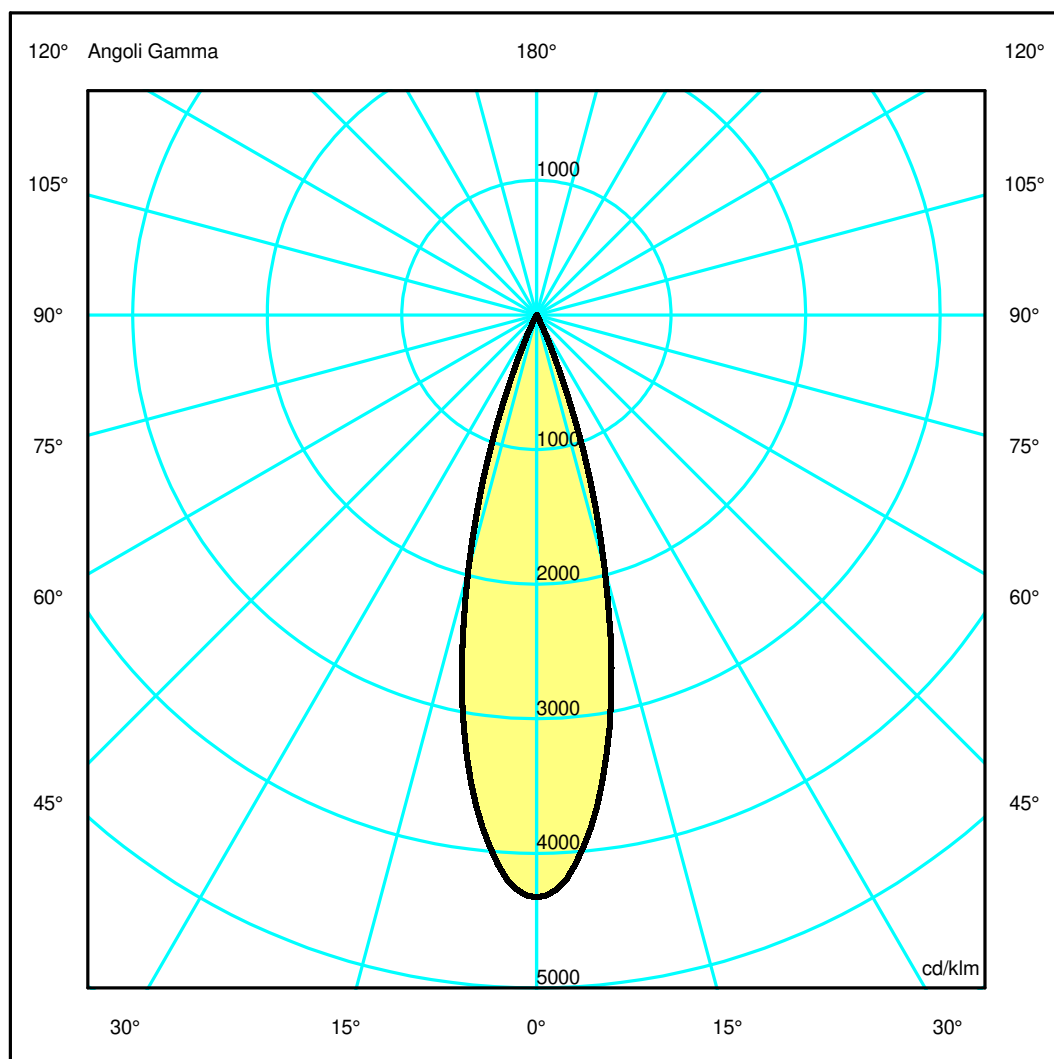

## Luminaire

Code CA31201+AP91400  
Name GOPLE 80 S / TRK16 48V 3000K WF BCO + VECTOR 55 - ANTI-DUZZLE LOUVRE

## Measurem.


Code FTS2200059-A  
Name GOPLE 80 S / TRK16 48V 3000K WF BCO + VECTOR 55 - ANTI-DUZZLE LOUVRE

|  |         |                 |                |                             |               |                 |                 |
|--|---------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux   | 1411 lm | Luminaire Power | 19.0 W         | Efficacy                    | 74.263 lm/W   | Efficiency      | 100.00%         |
| Source Flux  | 1411 lm | Maximum value   | 4326.59 cd/klm | Position                    | C=0.00 G=0.00 | CG              | Rotosymmetrical |
| Round Luminaire  |         | Diam.           | 77 mm          | Height                      | 150 mm        |                 |                 |
| Round Luminous Area  |         | Diam.           | 48 mm          | Height                      | 0 mm          |                 |                 |
| Horizontal Luminous Area   |         | 0.001810 m2     |                | Emitting area on Plane 180° |               | 0.000000 m2     |                 |
| Emitting area on Plane 0°  |         | 0.000000 m2     |                | Emitting area on Plane 270° |               | 0.000000 m2     |                 |
| Emitting area on Plane 90°   |         | 0.000000 m2     |                | Glare area at 76°           |               | 0.000438 m2     |                 |
| Coordinate system  |         | CG              |                | Symmetry Type               |               | Rotosymmetrical |                 |
| Date   |         | 08-01-2025      |                | Maximum Gamma Angle         |               | 180             |                 |
| Measurement Distance   |         | 0.00            |                | Measurement Flux            |               | 1411 lm         |                 |
| LED Flux=2584lm LED Power=18W Eff=55% EfcLed=147lm/W EfcLum=74lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6k)=33000h |         |                 |                |                             |               |                 |                 |
| C.I.E.   | 100     | 100             | 100            | 100                         | 100           | D DIN 5040      | A60             |
| F UTE  | --      |                 |                |                             |               | B NBN           | BZ 1            |

Width at 50.00 % of Max Intensity

|      |      |      |      |      |      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA   | 0.25 | 0.50 | 0.76 | 1.01 | 1.26 | OC   | 0.25 | 0.50 | 0.76 | 1.01 | 1.26 |
| OB   | 0.25 | 0.50 | 0.76 | 1.01 | 1.26 | OD   | 0.25 | 0.50 | 0.76 | 1.01 | 1.26 |

|    |                                |         |         |        |       |      |      |      |      |      |
|----|--------------------------------|---------|---------|--------|-------|------|------|------|------|------|
|    | Luminous Intensities [ cd/klm] |         |         |        |       |      |      |      |      |      |
|    | 0                              | 5       | 15      | 25     | 35    | 45   | 55   | 65   | 75   | 85   |
| OA | 6104.82                        | 5601.40 | 2759.35 | 219.47 | 20.04 | 4.96 | 1.69 | 0.54 | 0.38 | 0.31 |
| OB | 6104.82                        | 5601.40 | 2759.35 | 219.47 | 20.04 | 4.96 | 1.69 | 0.54 | 0.38 | 0.31 |
| OC | 6104.82                        | 5601.40 | 2759.35 | 219.47 | 20.04 | 4.96 | 1.69 | 0.54 | 0.38 | 0.31 |
| OD | 6104.82                        | 5601.40 | 2759.35 | 219.47 | 20.04 | 4.96 | 1.69 | 0.54 | 0.38 | 0.31 |

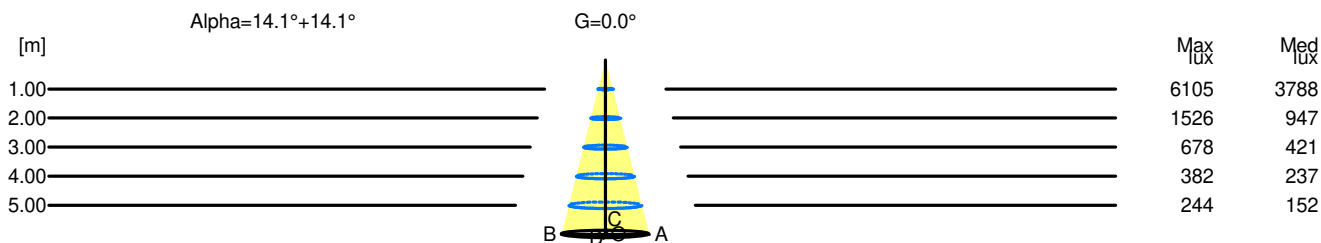

| H[m] | D[m] | Max lux | Med lux | Alpha=14.1°+14.1° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.50 | 6105    | 3788    |                   |       |
| 2.00 | 1.01 | 1526    | 947     |                   |       |
| 3.00 | 1.51 | 678     | 421     |                   |       |
| 4.00 | 2.01 | 382     | 237     |                   |       |
| 5.00 | 2.52 | 244     | 152     |                   |       |