

Luminaire

Code KZ50104
Name kata metron pst spt 2x40 Dali 927 FL nro

Measurem.

Code FTS2400431
Name kata metron pst spt 2x40 Dali 927 FL nro

Luminaire Flux	556 lm	Luminaire Power	9.5 W	Efficacy	58.526 lm/W	Efficiency	100.00%
Source Flux	556 lm	Maximum value	5684.10 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	40 mm 33 mm	Width Height	40 mm 0 mm	Height	103 mm
Horizontal Luminous Area		0.000855 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000207 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		556 lm	
LED Flux=805lm LED Power=8W Eff=69% EfcLed=102lm/W EfcLum=59lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(9k)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1


40mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

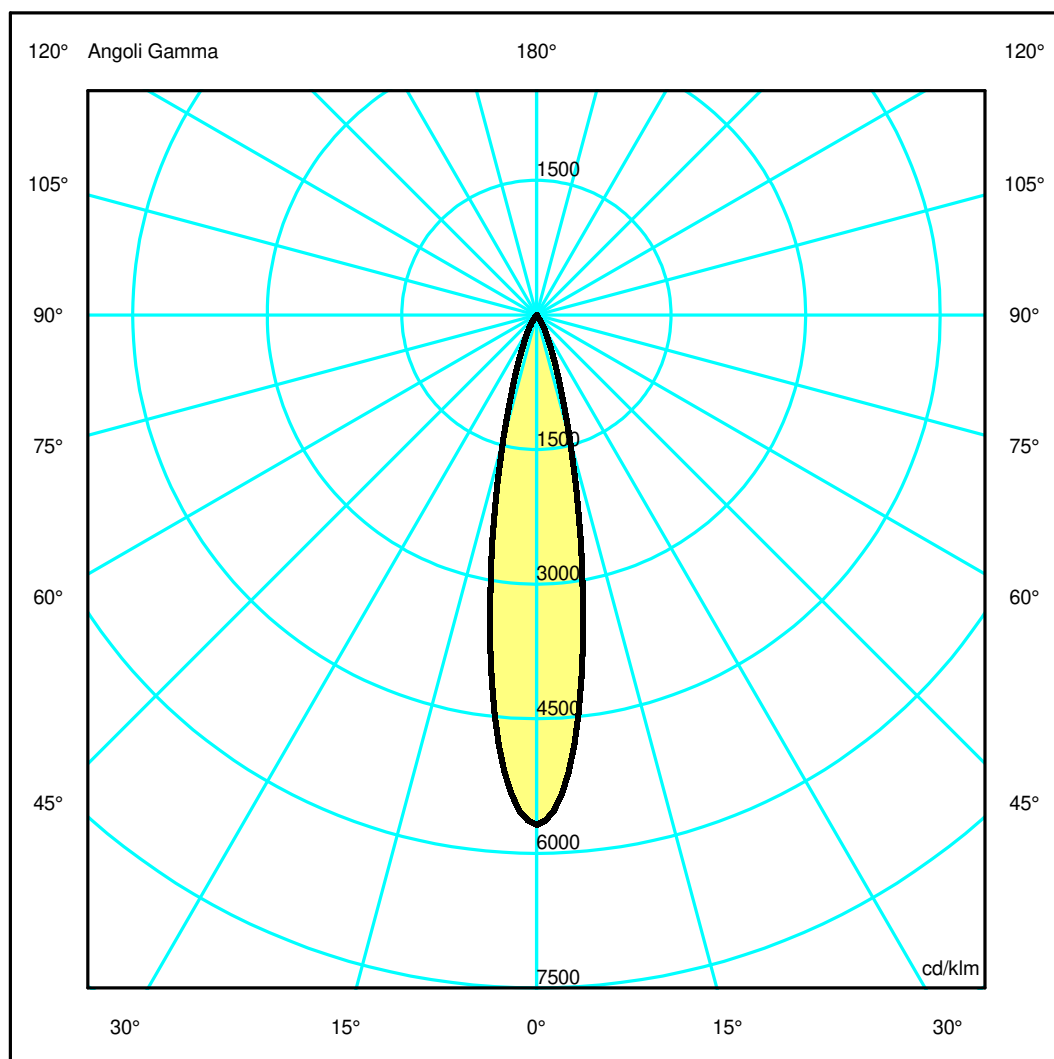

Luminaire

Code KZ50104
Name kata metron pst spt 2x40 Dali 927 FL nro

Measurem.


Code FTS2400431
Name kata metron pst spt 2x40 Dali 927 FL nro

Luminaire Flux	556 lm	Luminaire Power	9.5 W	Efficacy	58.526 lm/W	Efficiency	100.00%
Source Flux	556 lm	Maximum value	5684.10 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	40 mm 33 mm	Width Height	40 mm 0 mm	Height	103 mm
Horizontal Luminous Area		0.000855 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000207 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		556 lm	
LED Flux=805lm LED Power=8W Eff=69% EfcLed=102lm/W EfcLum=59lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(9k)=50000h							
C.I.E. F UTE	99 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.36	0.54	0.72	0.91	OC	0.18	0.36	0.54	0.72	0.91
OB	0.18	0.36	0.54	0.72	0.91	OD	0.18	0.36	0.54	0.72	0.91

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3160.36	2675.99	794.27	173.33	23.81	4.24	1.72	0.50	0.00	0.00
OB	3160.36	2675.99	794.27	173.33	23.81	4.24	1.72	0.50	0.00	0.00
OC	3160.36	2675.99	794.27	173.33	23.81	4.24	1.72	0.50	0.00	0.00
OD	3160.36	2675.99	794.27	173.33	23.81	4.24	1.72	0.50	0.00	0.00

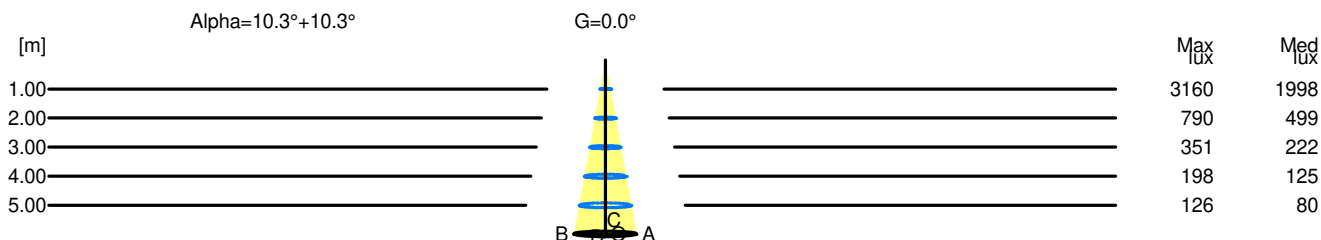

H[m]	D[m]	Max lux	Med lux	Alpha=10.3°+10.3°	G=0.0
1.00	0.36	3160	1998		
2.00	0.72	790	499		
3.00	1.09	351	222		
4.00	1.45	198	125		
5.00	1.81	126	80		