

## Luminaire

Code CK10304  
Name HOY SPOT LENS 65 SMD 2700K FL DALI NRO

## Measurem.

Code FTS2600124  
Name HOY SPOT LENS 65 SMD 2700K FL DALI NRO

Luminaire Flux	1467 lm	Luminaire Power	15.5 W	Efficacy	94.645 lm/W	Efficiency	100.00%
Source Flux	1467 lm	Maximum value	4514.22 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	65 mm	Height	85 mm		
Round Luminous Area		Diam.	45 mm	Height	0 mm		
Horizontal Luminous Area		0.001590 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000385 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		25-03-2026		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1467 lm	
LED Flux=1944lm LED Power=14W Eff=75% EfcLed=142lm/W EfcLum=95lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(17k)=50000h							
C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1


Diam=65mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %

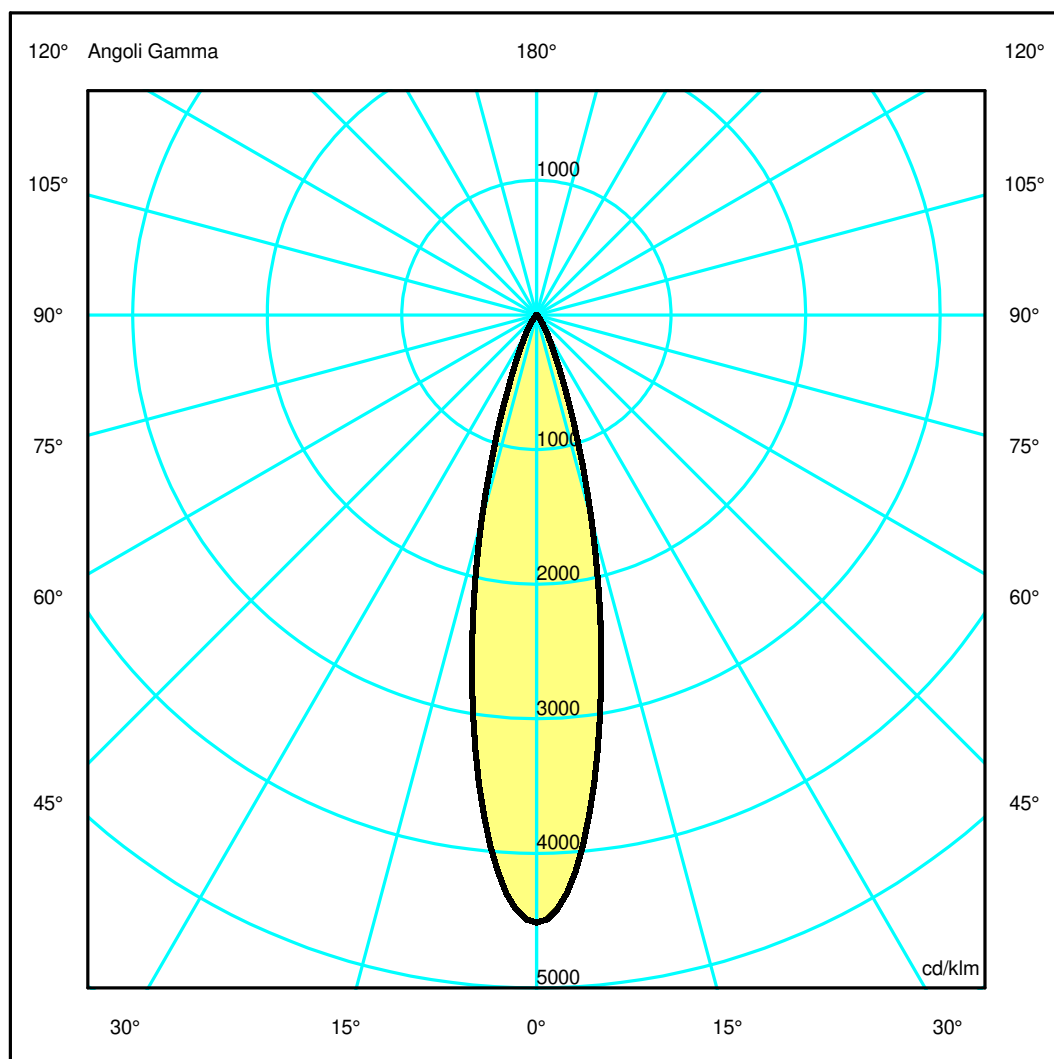

## Luminaire

Code CK10304  
Name HOY SPOT LENS 65 SMD 2700K FL DALI NRO

## Measurem.


Code FTS2600124  
Name HOY SPOT LENS 65 SMD 2700K FL DALI NRO

Luminaire Flux	1467 lm	Luminaire Power	15.5 W	Efficacy	94.645 lm/W	Efficiency	100.00%
Source Flux	1467 lm	Maximum value	4514.22 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	65 mm	Height	85 mm		
Round Luminous Area		Diam.	45 mm	Height	0 mm		
Horizontal Luminous Area		0.001590 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000385 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		25-03-2026		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1467 lm	
LED Flux=1944lm LED Power=14W Eff=75% EfcLed=142lm/W EfcLum=95lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(17k)=50000h							
C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.43	0.64	0.85	1.07	OC	0.21	0.43	0.64	0.85	1.07
OB	0.21	0.43	0.64	0.85	1.07	OD	0.21	0.43	0.64	0.85	1.07

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6622.36	5802.40	2320.21	465.60	107.08	28.97	8.34	3.59	1.39	0.29
OB	6622.36	5802.40	2320.21	465.60	107.08	28.97	8.34	3.59	1.39	0.29
OC	6622.36	5802.40	2320.21	465.60	107.08	28.97	8.34	3.59	1.39	0.29
OD	6622.36	5802.40	2320.21	465.60	107.08	28.97	8.34	3.59	1.39	0.29

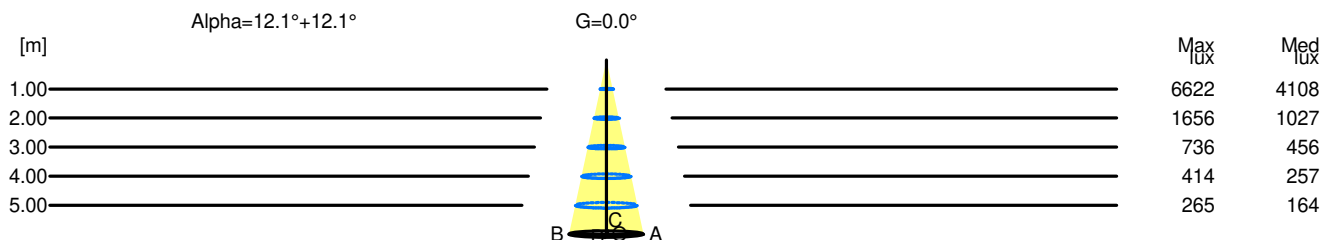

H[m]	D[m]	Max lux	Med lux	Alpha=12.1°+12.1°	G=0.0
1.00	0.43	6622	4108		
2.00	0.85	1656	1027		
3.00	1.28	736	456		
4.00	1.71	414	257		
5.00	2.14	265	164		