


## Luminaire

Code 1554W30APP  
Name ARRIVAL C 70 APP 2700K NRO

## Measurem.

Code FTS2600105  
Name ARRIVAL C 70 APP 2700K NRO

Luminaire Flux	768 lm	Luminaire Power	26.0 W	Efficacy	29.538 lm/W	Efficiency	100.00%
Source Flux	768 lm	Maximum value	105.76 cd/klm	Position	C=260.00 G=87.00	CG	Asymmetrical
Round Luminaire		Diam.	312 mm	Height	702 mm		
Round Luminous Area		Diam.	312 mm	Height	659 mm		
Horizontal Luminous Area		0.076454 m2		Emitting area on Plane 180°		0.205608 m2	
Emitting area on Plane 0°		0.205608 m2		Emitting area on Plane 270°		0.205608 m2	
Emitting area on Plane 90°		0.205608 m2		Glare area at 76°		0.217996 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		05-03-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		768 lm	
LED Flux=2183lm LED Power=21W Eff=35% EfcLed=104lm/W EfcLum=30lm/W CCT=2700K Ra=90 SDCM=3 L70(6k)=36000h							
C.I.E.	19 44 71 51 100			D DIN 5040		C11	
F UTE	0.51 J + 0.49 T			B NBN		BZ 9	

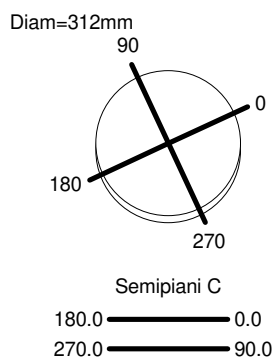

ULOR 48.50 %  
DLOR 51.50 %  
RN 48.50 %

