

A.24

Carlotta de Bevilacqua



Artemide

A.24

A.24

Carlotta de Bevilacqua
2017

PATENT OF
INVENTION



ARTEMIDE
APP




For further information on A.24
visit artemide.com



A.24

Carlotta de Bevilacqua
2017

A.24 is innovative and flexible system to design light in space. A single profile, only 24 mm thick, can be installed in the recessed, ceiling or suspension mode to continuously follow the angles on a flat or three-dimensional surface. This profile hosts to a variety of performance options: diffused light, sharp optical units with two beam angles, or a smart magnetic track. This makes A.24 a flexible system, as well as an open platform to accommodate other products from the Architectural collection. The suspension version also features indirect emission. The three solutions can be alternated to match the architecture and the room functions with utmost flexibility. The competence of Artemide is revealed by the quality of light, as well as by the ability of A.24 to freely move in space, with direct power connection points up to 14 metres apart.

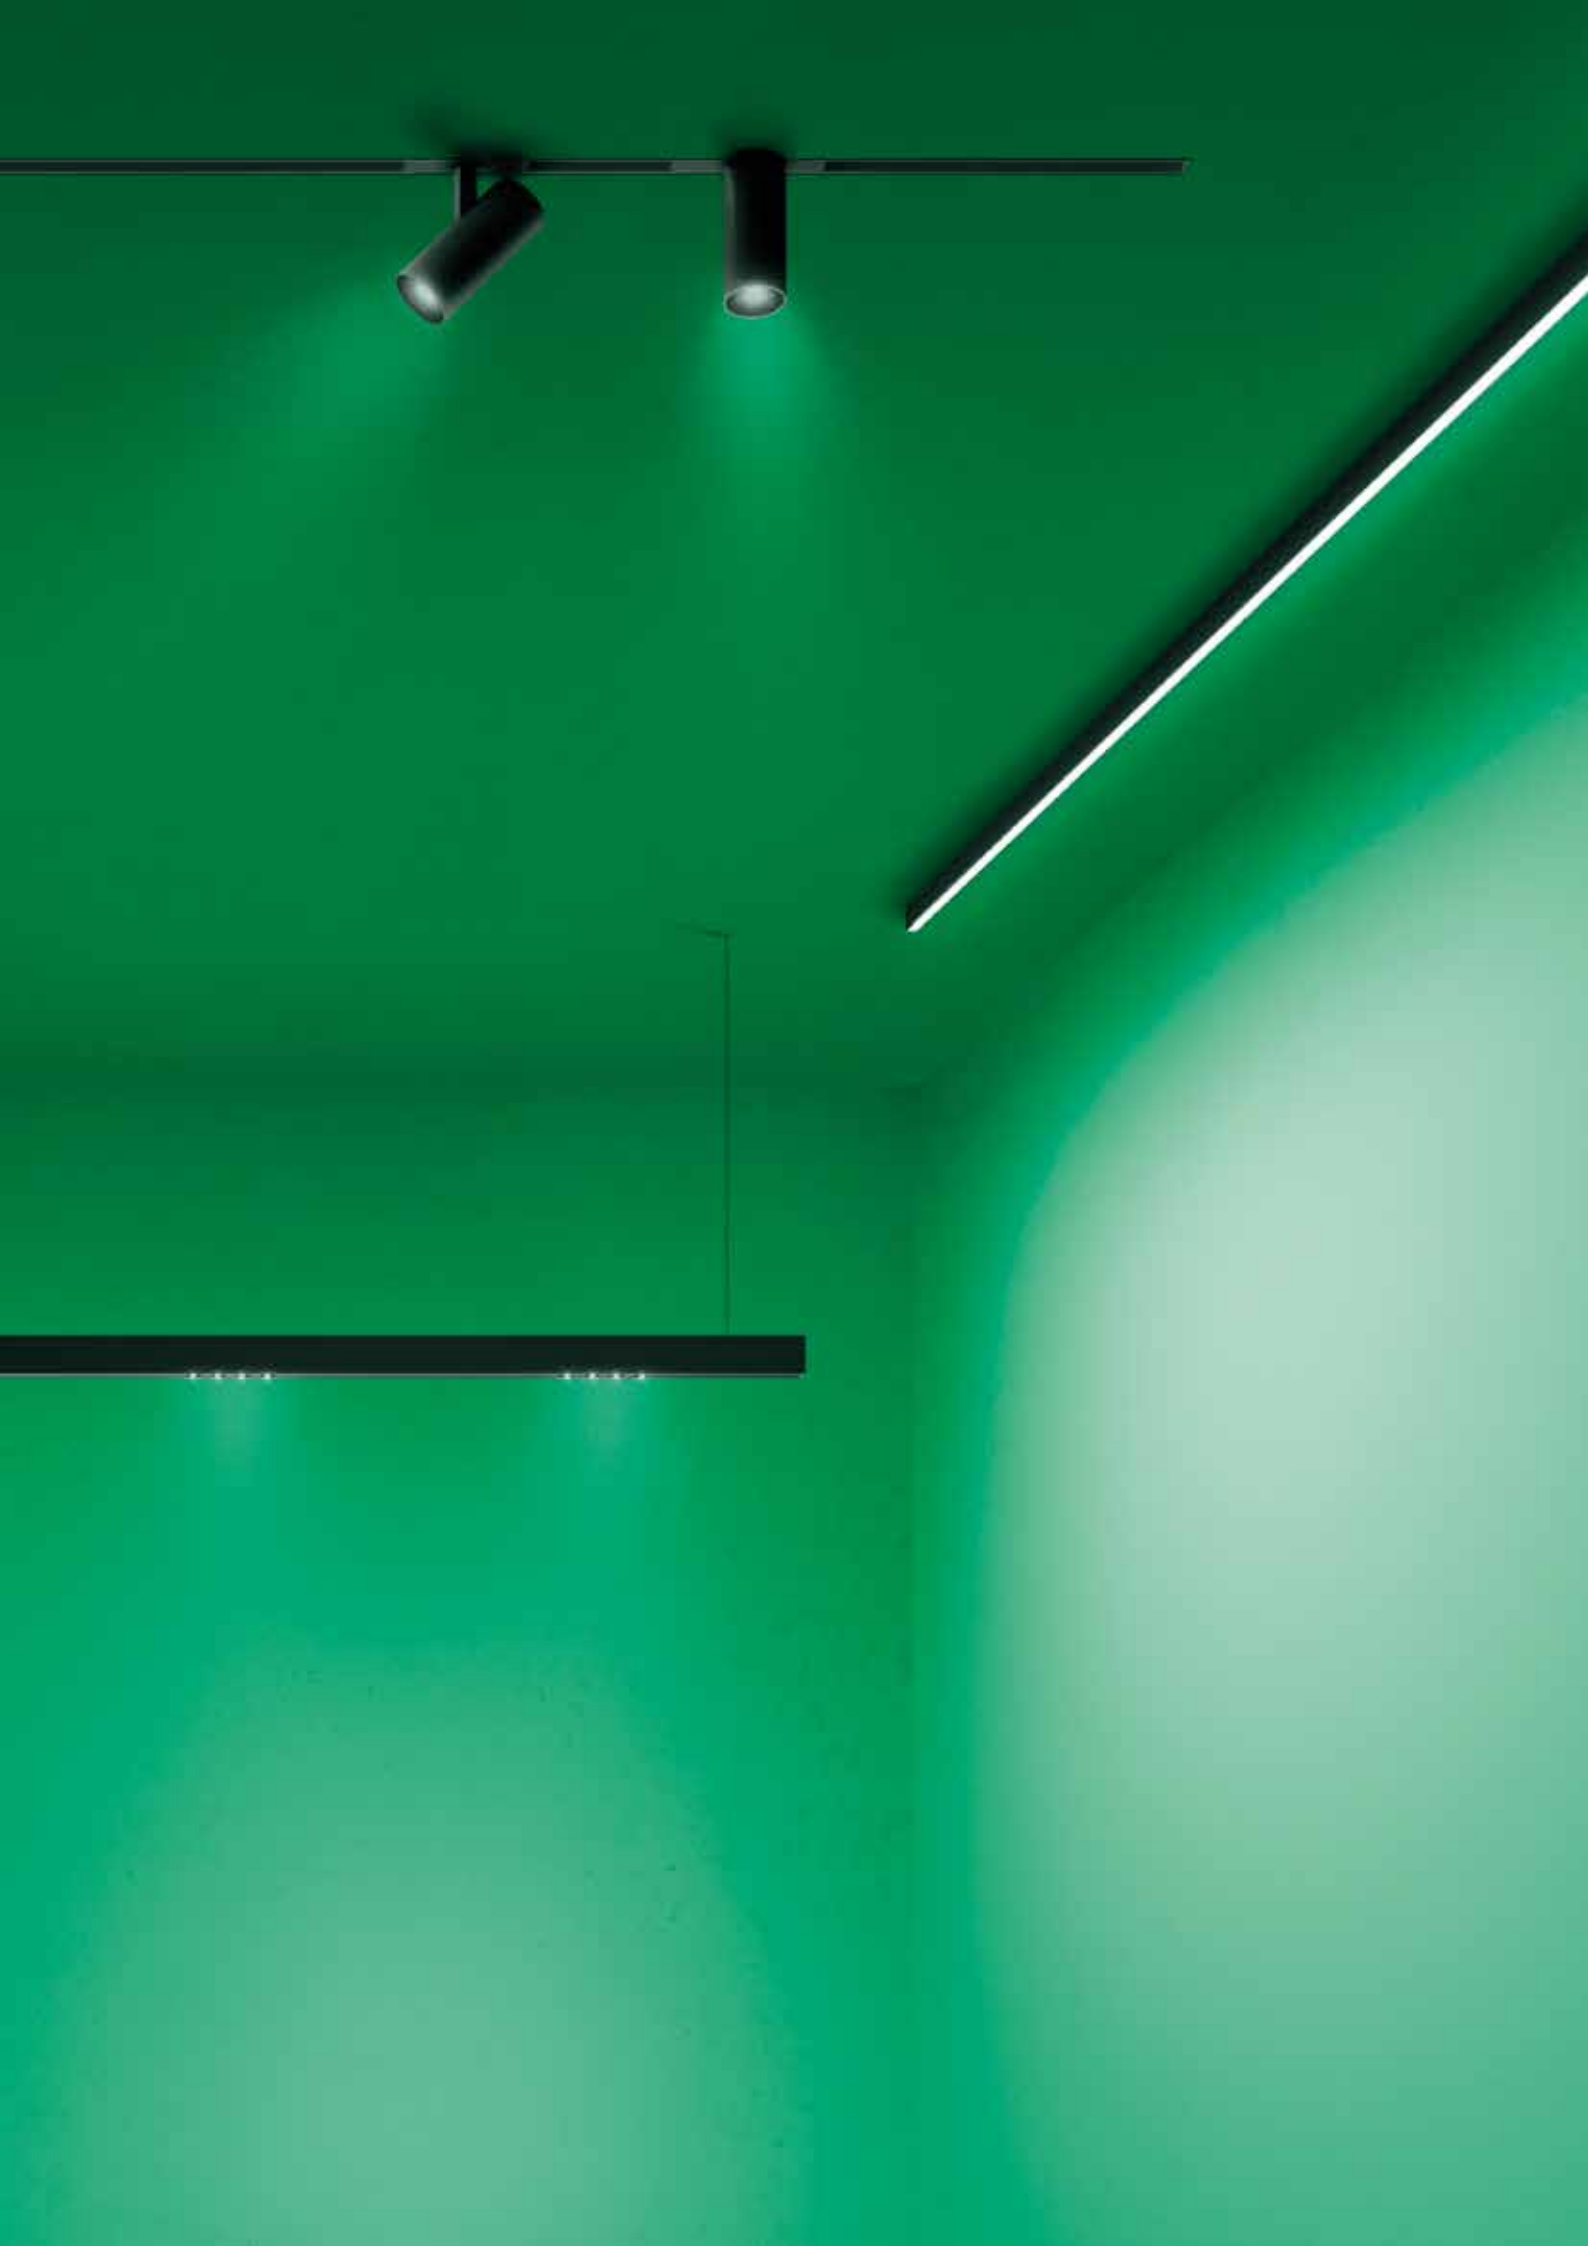





A.24 system



90° ANGLE MAGNETIC
301 x 301 mm



90° ANGLE DIFFUSED
301 x 301 mm



90° ANGLE SHARPING
301 x 301 mm



CIRCULAR DIFFUSED

RADIUS 561 mm (60° - 90°)
RADIUS 750 mm (45° - 90°)

CIRCULAR SHARPING

RADIUS 561 mm (60° - 90°)
RADIUS 750 mm (45° - 90°)

CIRCULAR MAGNETIC

RADIUS 561 mm (60° - 90°)
RADIUS 750 mm (45° - 90°)

LINEAR MAGNETIC TRACK

1176 - 2352 mm



LINEAR DIFFUSED

1176 - 2352 mm




LINEAR SHARPING

1176 - 2352 mm




A.24 system

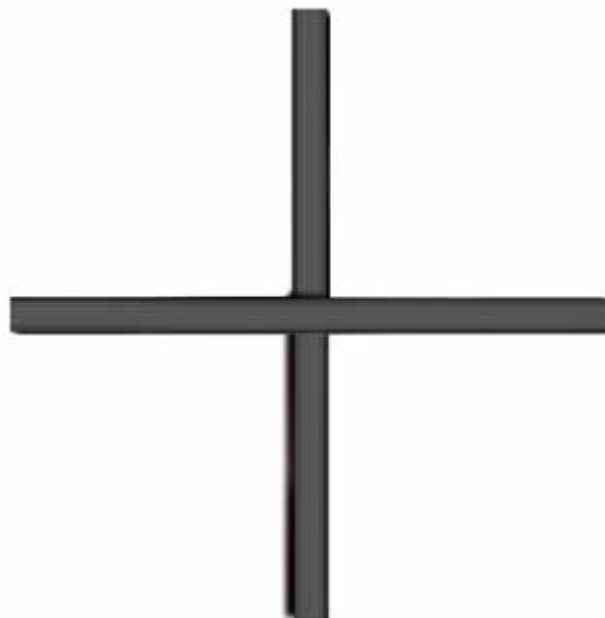

X JOINT MAGNETIC
603 x 603 mm



T JOINT MAGNETIC
603 X 315 mm

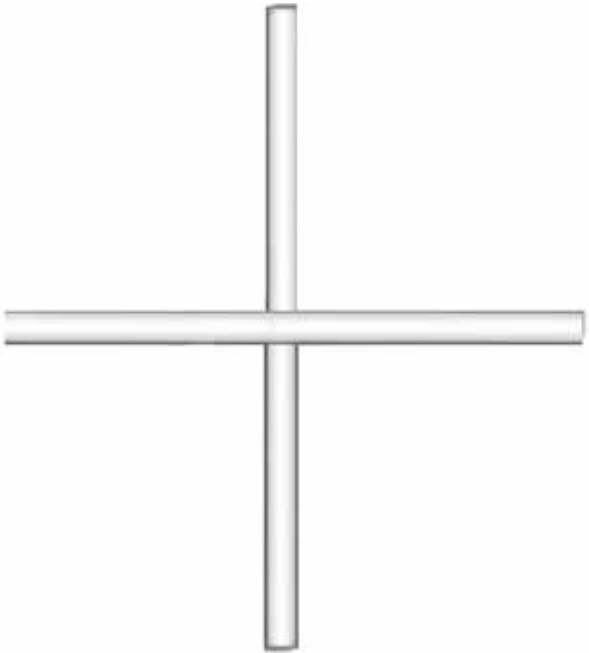

X JOINT DIFFUSED
603 x 603 mm



X JOINT SHARPING
603 x 603 mm



T JOINT DIFFUSED
603 X 315 mm




T JOINT SHARPING
603 X 315 mm





A.24 stand-alone typologies



A large circular lighting fixture with a dark, thin outer ring containing small, evenly spaced lights. Inside this ring is a larger, white circular area with a thin, dark inner ring. The overall appearance is that of a modern, minimalist ceiling light fixture.

CIRCULAR SHARPING

Ø 1122 mm

Ø 1500 mm

CIRCULAR DIFFUSED

Ø 1122 mm

Ø 1500 mm



change IS EVERYWHERE

A.24 / Vector colors

White



Black



Fast delivery

Bronze



Brushed Copper



Brushed Silver



Delivery time on demand

A.24

color temperatures




Fast delivery



Delivery time on demand

ADDRESS
1

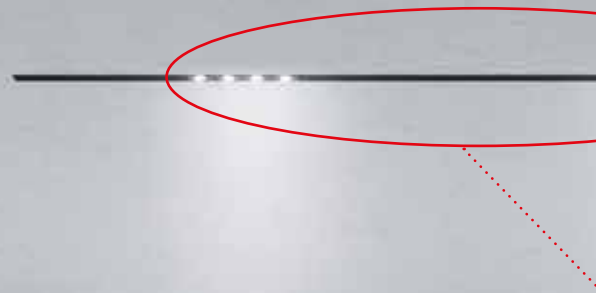


A.24 is fully addressable


Each module and spot can be managed separately by Artemide App or by DALI control

ADDRESS
10



ADDRESS
9



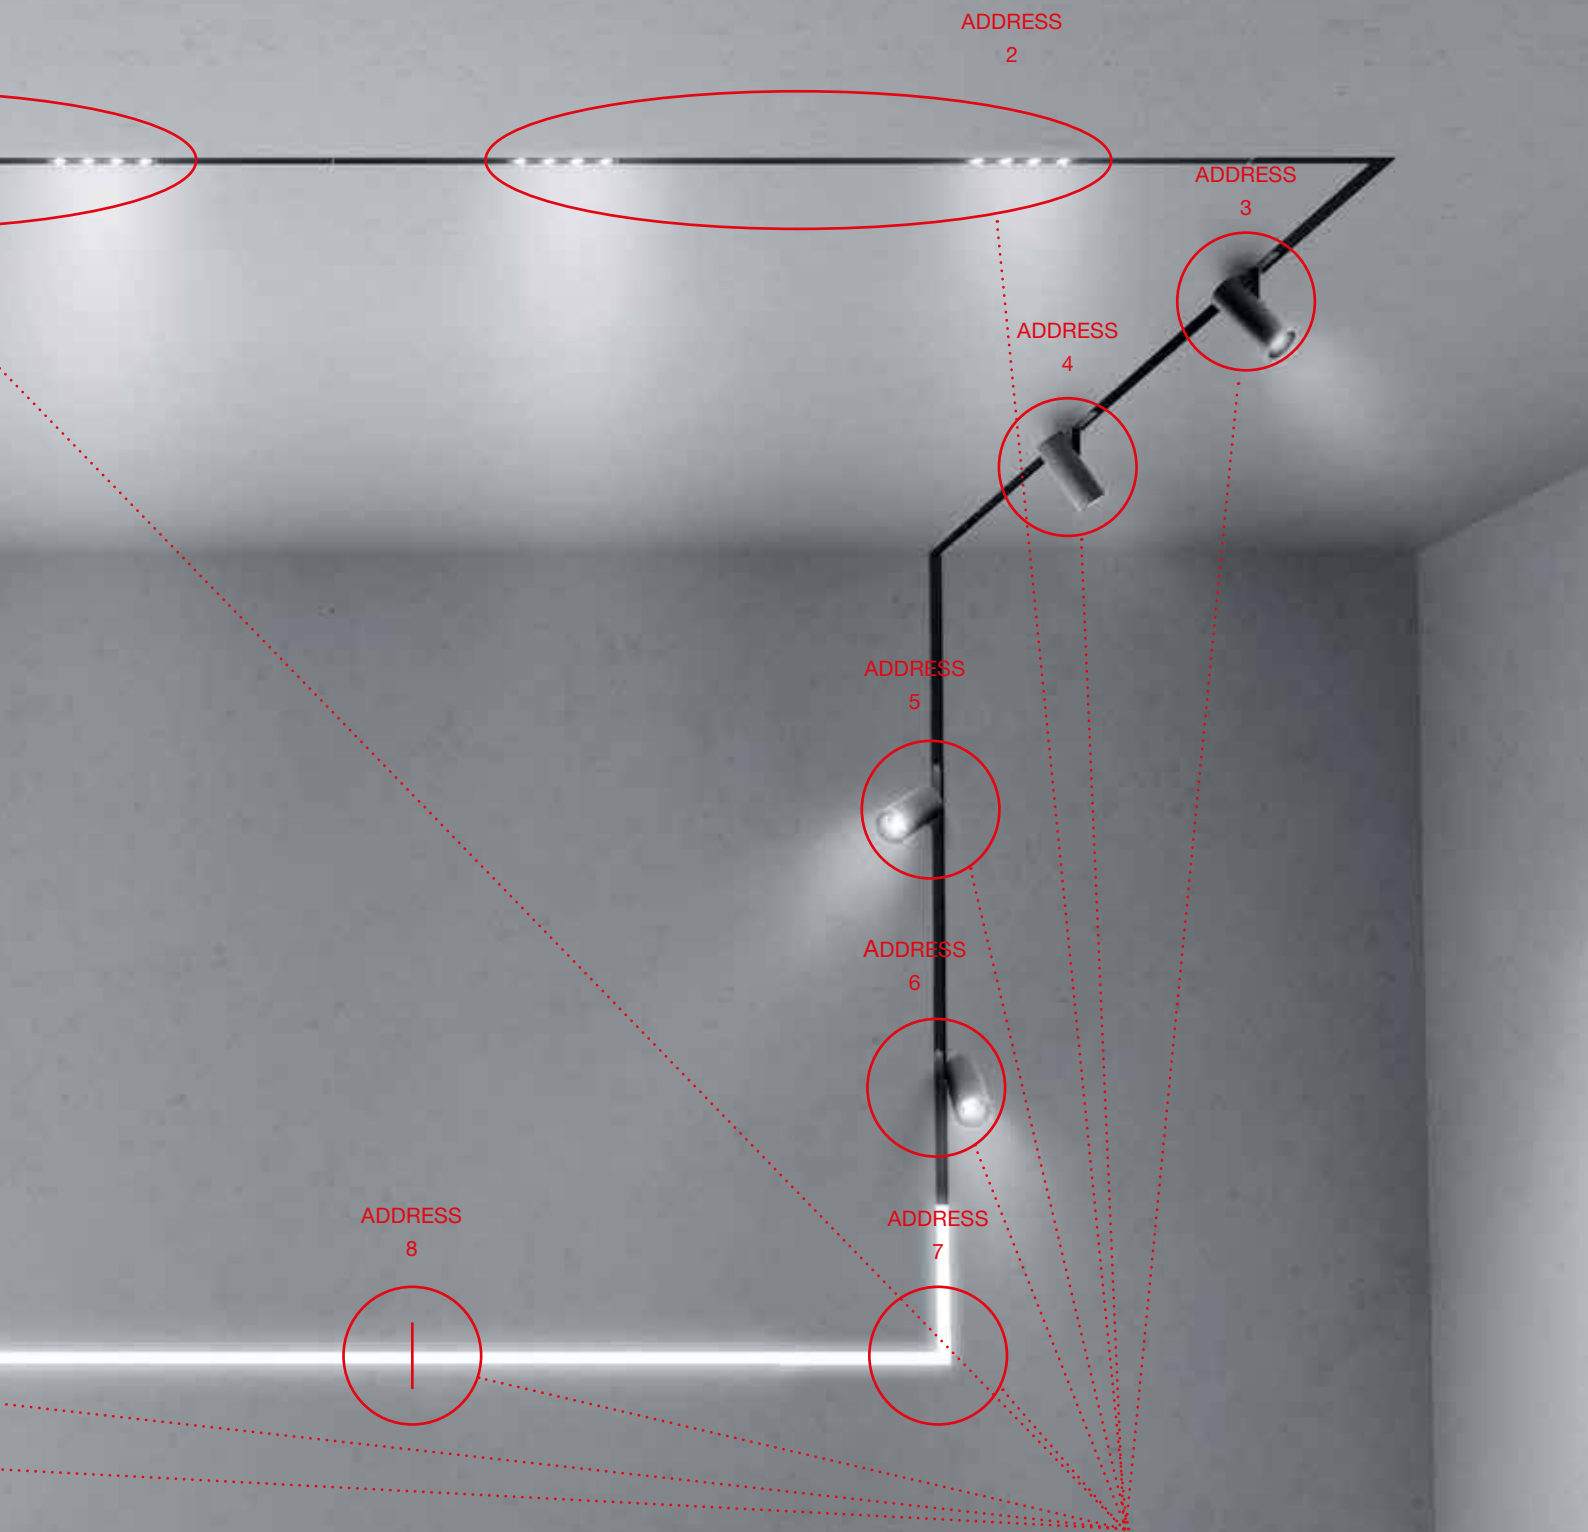

ARTEMIDE
APP

16W / 33W
MacAdam 2SDCM
CRI=90
CCT: 2700K / 3000K / 4000K



6,5W
*7W
MacAdam 3SDCM
CRI=90
CCT: 2700K / 3000K / 4000K




S 14° 329 lm
*F 21° 335 lm
*WF 28° 292 lm

9W
MacAdam 3SDCM
*MacAdam 2SDCM
CRI=90
CCT: 2700K / 3000K / 4000K



S 14° 541 lm
*F 21° 584 lm
WF 28° 529 lm

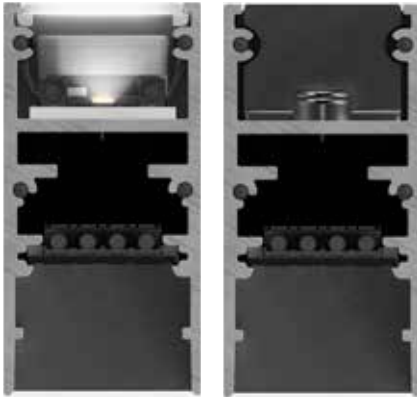

A.24 magnetic

19W
MacAdam 3SDCM
CRI=90
CCT: 2700K / 3000K / 4000K




S 15°
1771 lm

F 22°
1811 lm

WF 31°
1878 lm

16W
MacAdam 3SDCM
CRI=90
CCT: 2700K / 3000K / 4000K



S 22° → WF 31°
637 lm 1098 lm

Vector 55



Vector 55 zoom



A.24 magnetic is Artemide SELV

a unique feature developed for a real
safe DALI interface.



D.art® is a technology developed by Artemide that overcomes the safety limits of the DALI signal in devices where the same signal is accessible to the touch.


The DALI signal is transformed to a “SELV” voltage ensuring the total safety of the appliance.

A.24 has been designed in compliance with international certifications.





16W / 33W
MacAdam 2SDCM
CRI=90
CCT: 2700K / 3000K / 4000K

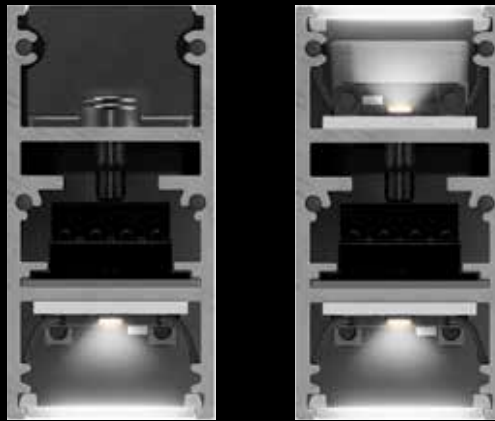



33W / 66W
MacAdam 2SDCM
CRI=90
CCT: 2700K / 3000K / 4000K



A.24 diffused



16W / 33W
MacAdam 2SDCM
CRI=90
CCT: 2700K / 3000K / 4000K

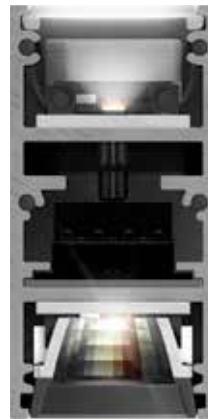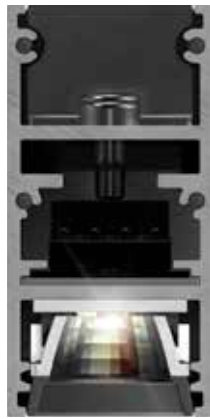

MacAdam 2SDCM / 3SDCM
CRI=90
CCT: 2700K / 3000K / 4000K



22W
S 24°

22W
XF 62°


45W
S 24°

45W
XF 62°

A.24 sharpening

RECESSED
TRIMLESS


CEILING

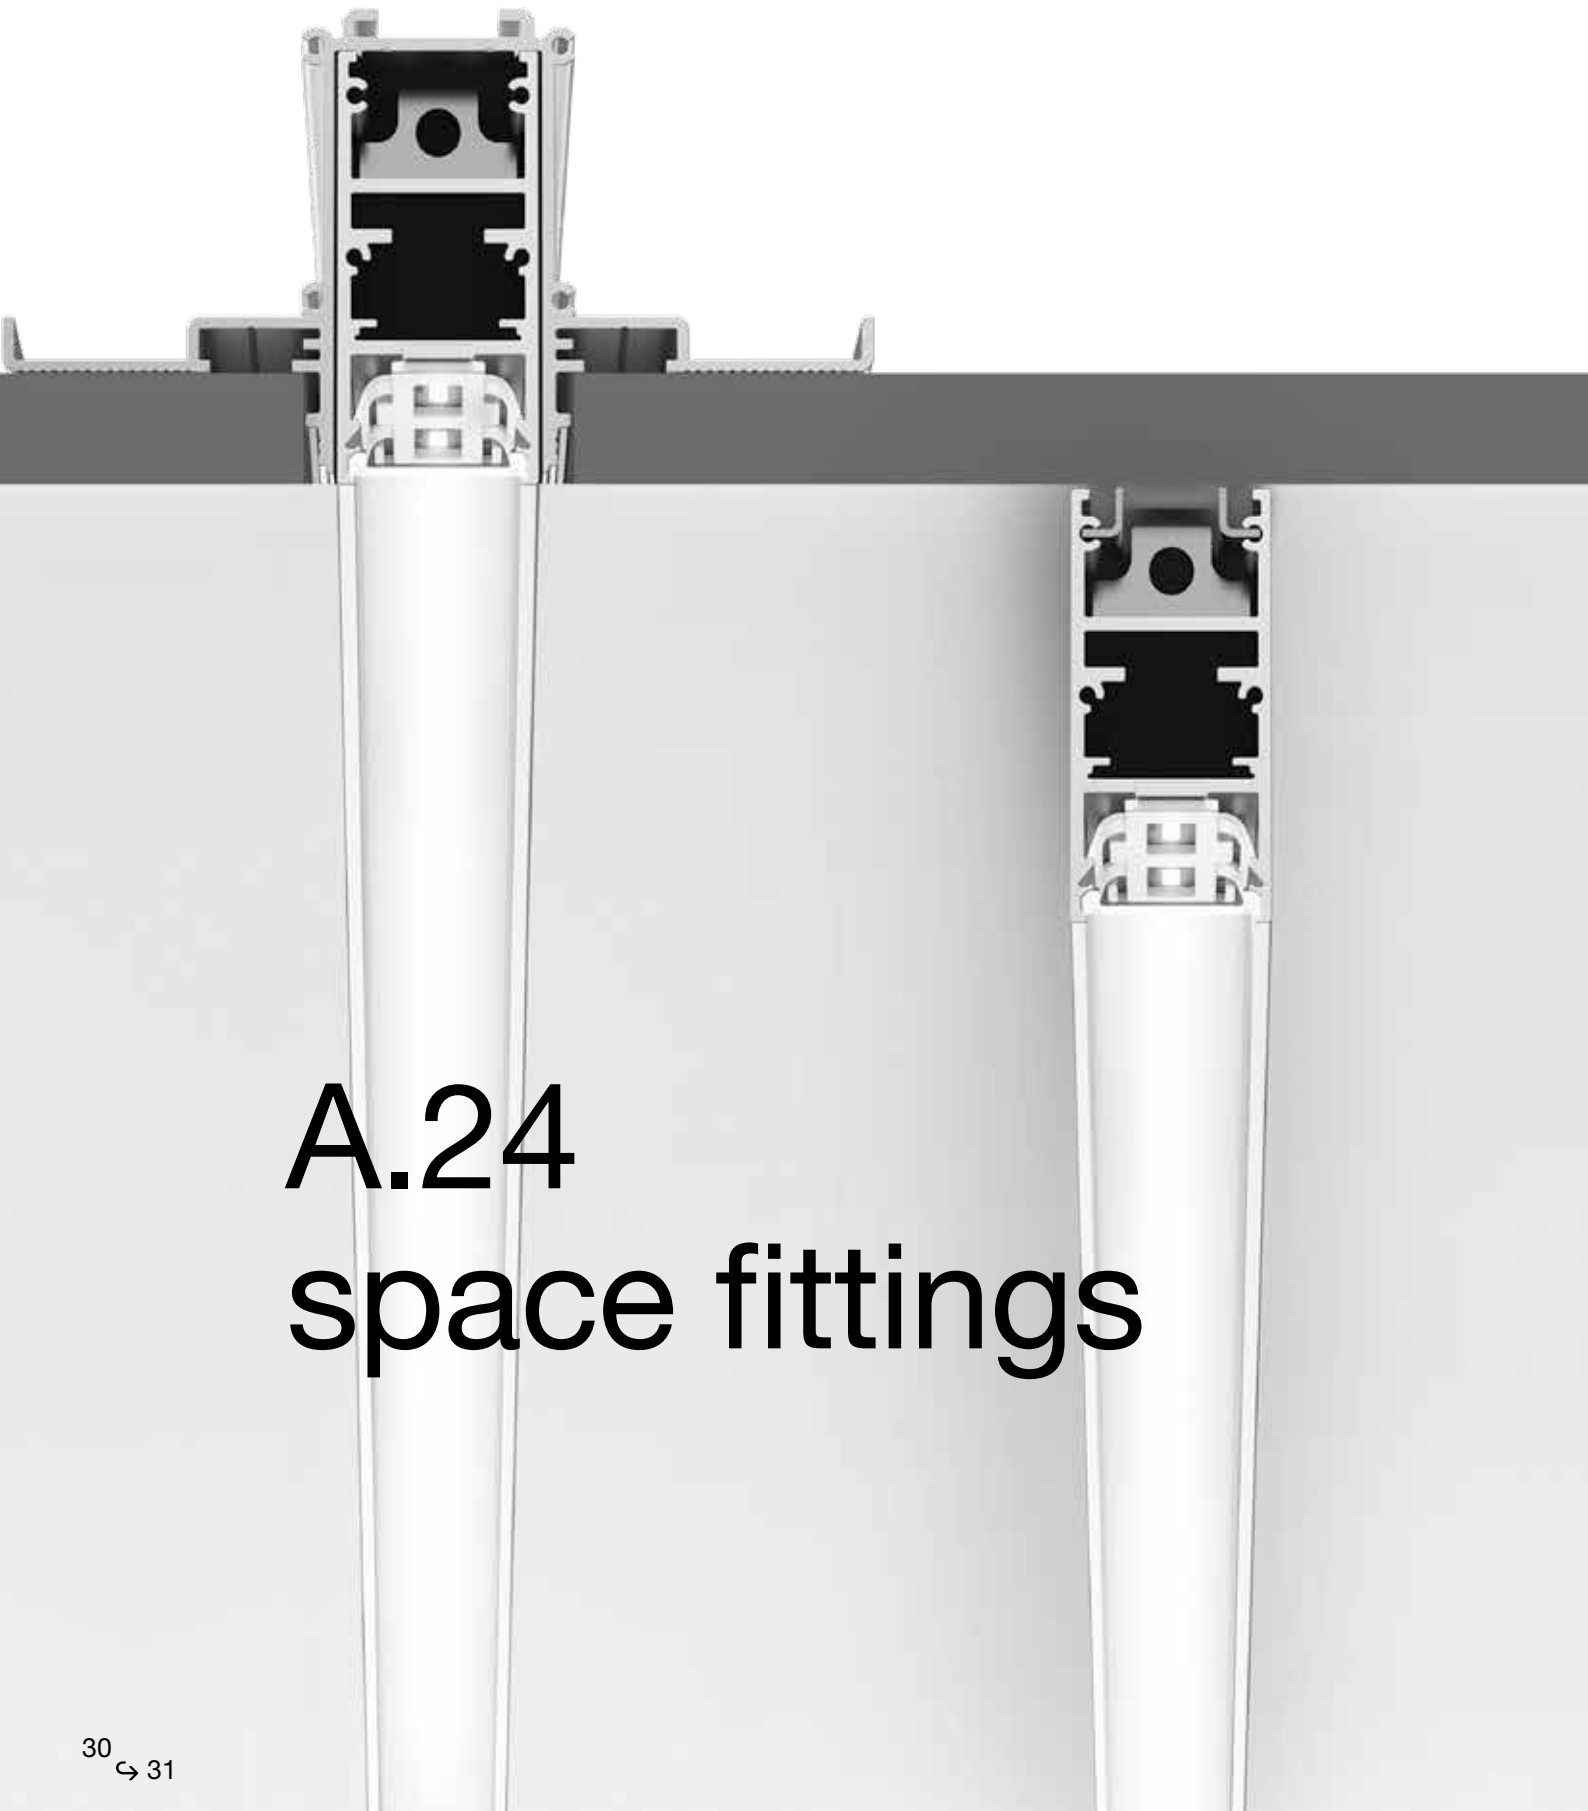

A.24 space fittings

SUSPENSION



SUSPENSION WITH
INDIRECT EMISSION

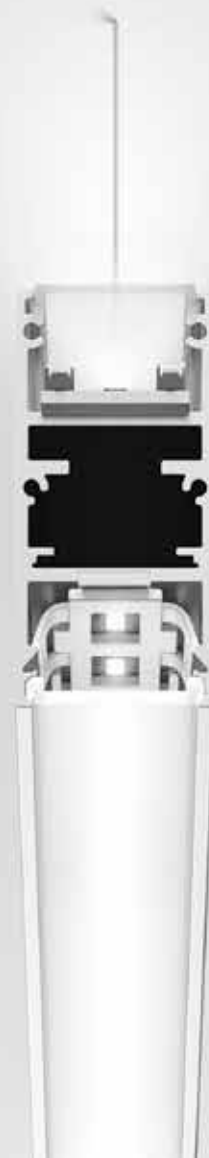

A.24 is balanced





NO TRACK'S ROTATION WHEN THE SPOTLIGHTS ARE TILTED IN THE SAME DIRECTION.
SUSPENSION CABLE WITHOUT STIFF STEMS.

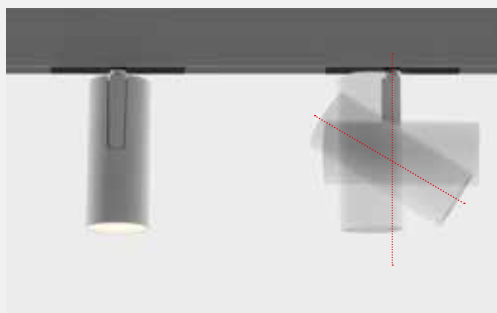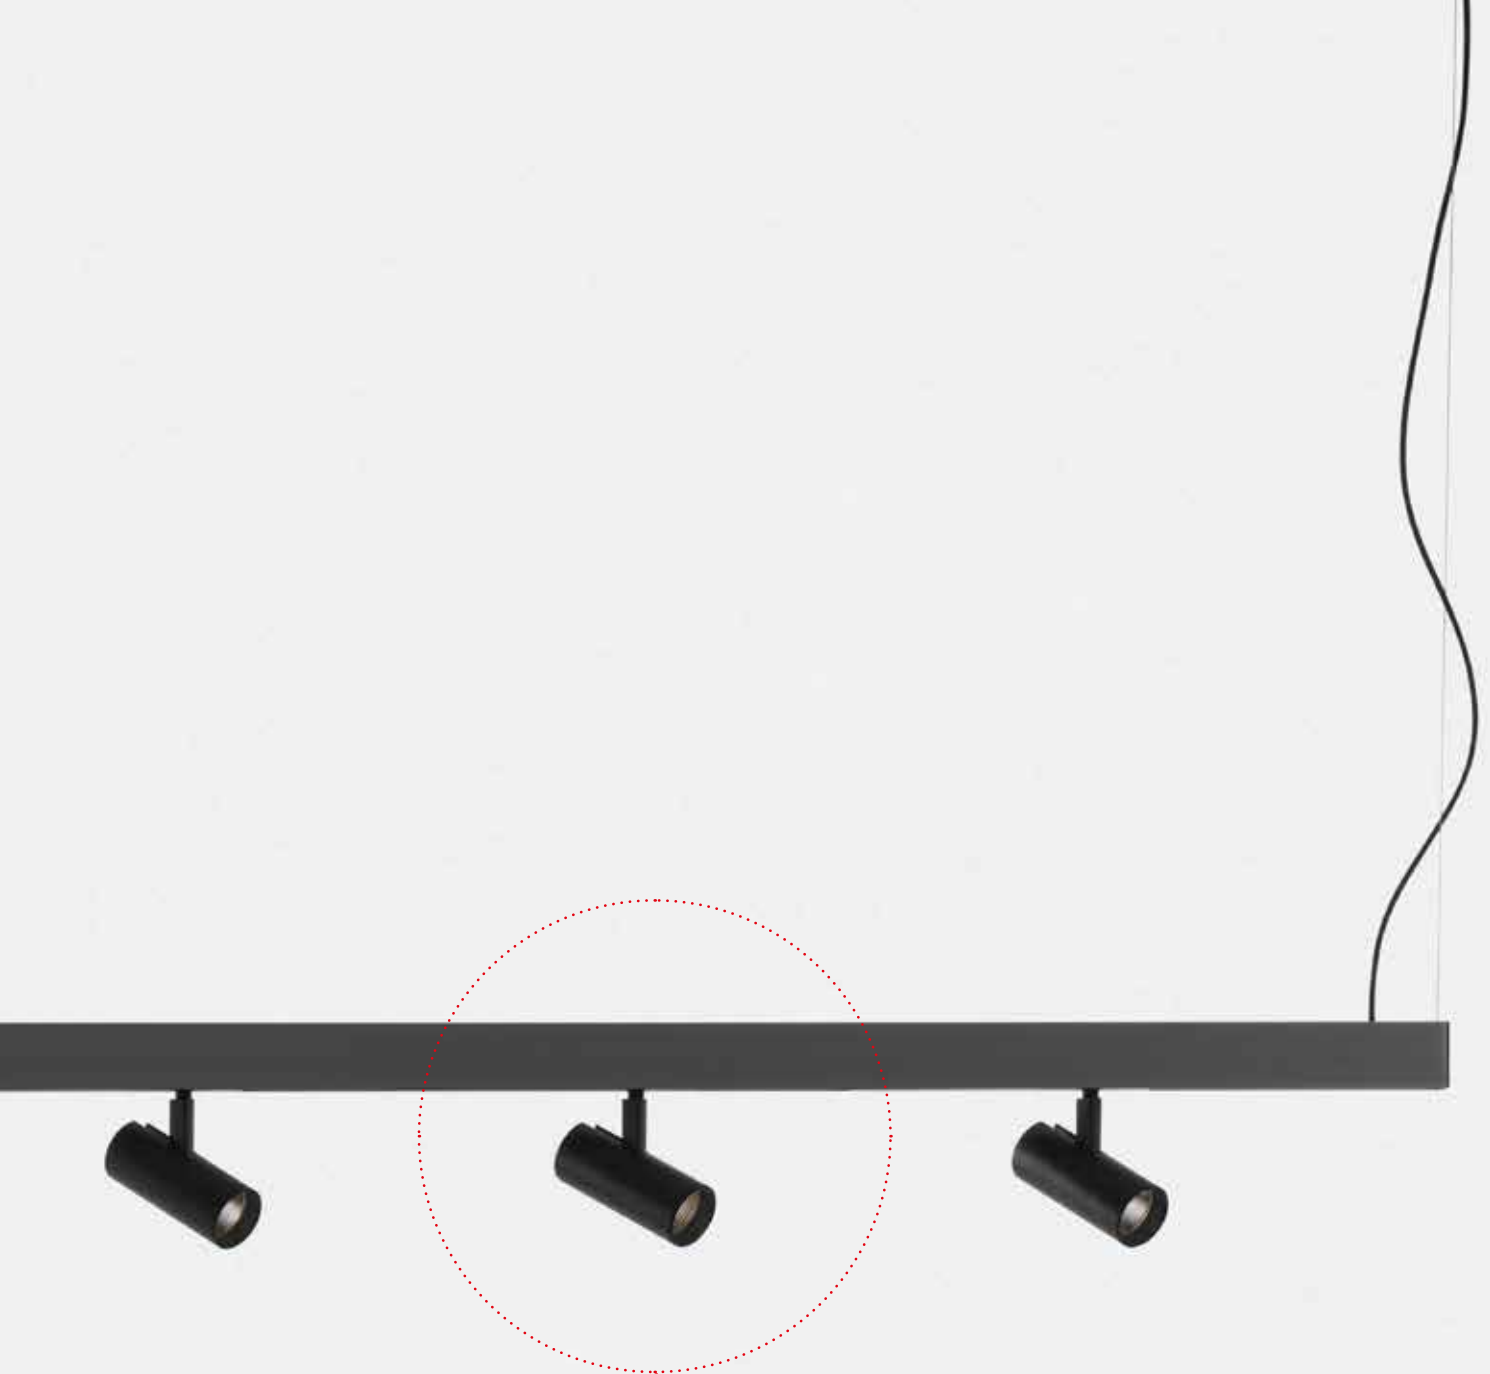



The junction arm is integrated with the spotlight body.

The center of balance is perfectly aligned with the track.

A.24 / Vector infinite possibilities

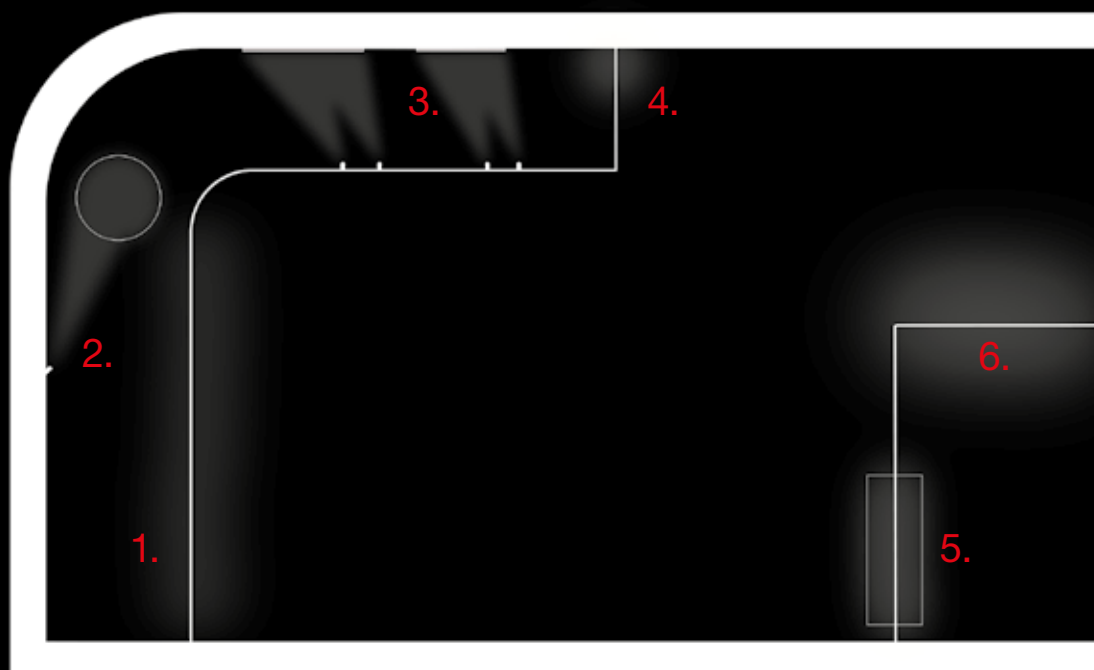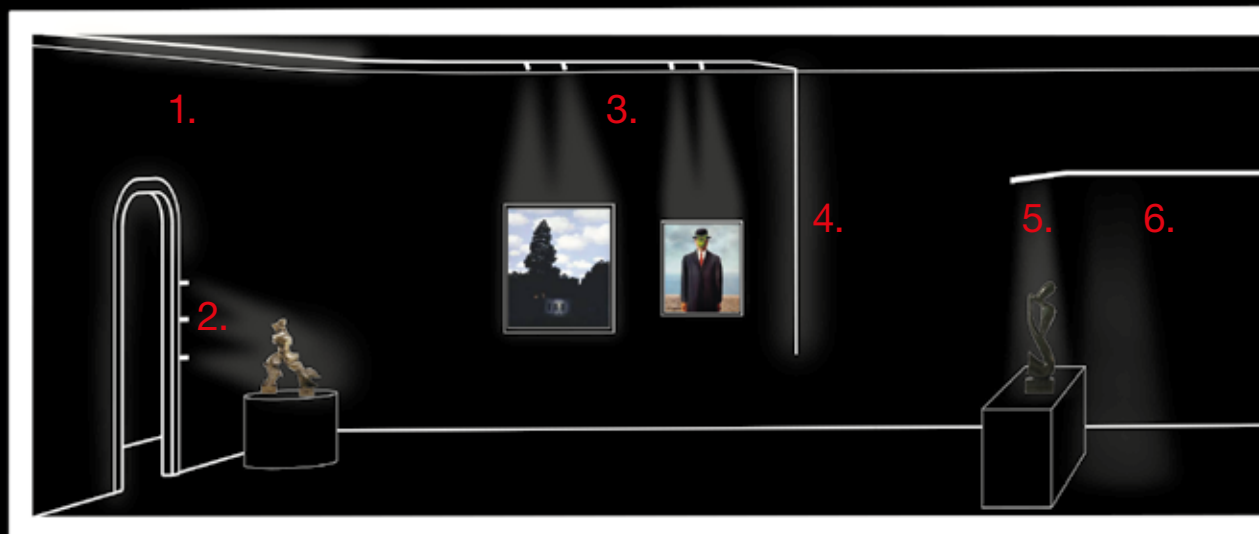

1. A.24 recessed diffused emission
2. Vector 40 magnetic
3. Vector 55 magnetic
4. A.24 ceiling - wall diffused emission
5. A.24 suspension sharpening emission 24°
6. A.24 suspension diffused emission
7. A.24 suspension sharpening emission 64°
8. Vector 55 zoom magnetic
9. Vector pendant securlock 40/55
10. A.24 suspension indirect diffused emission

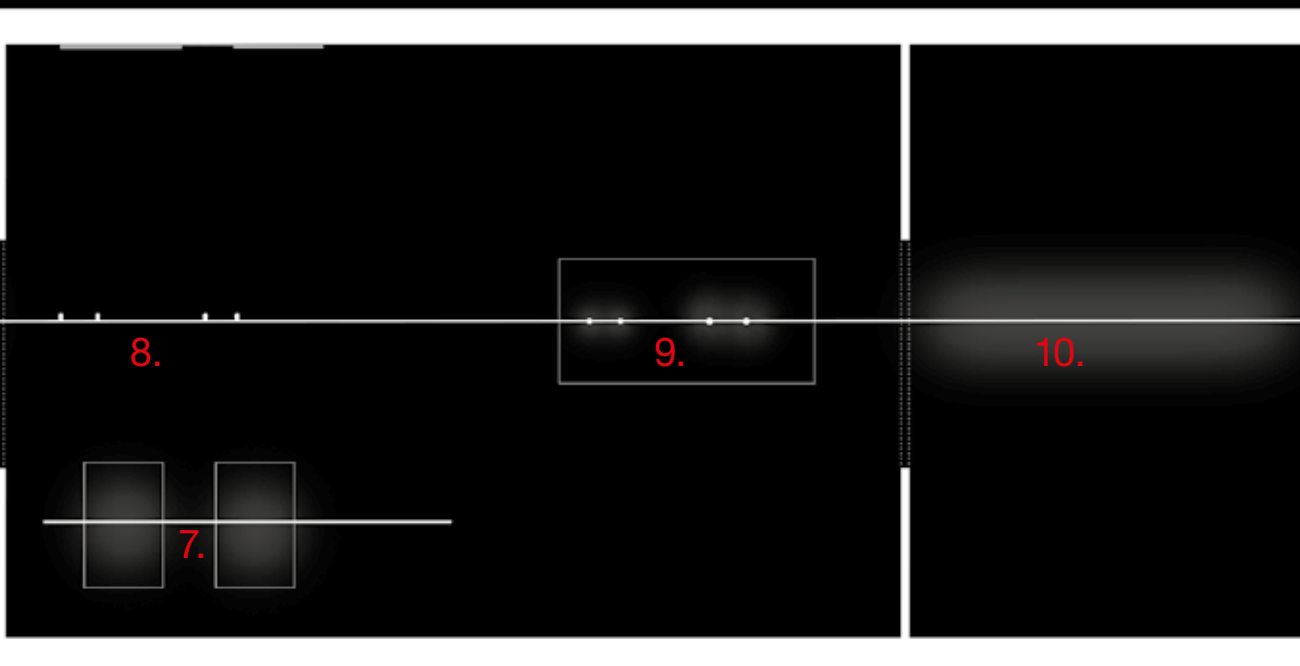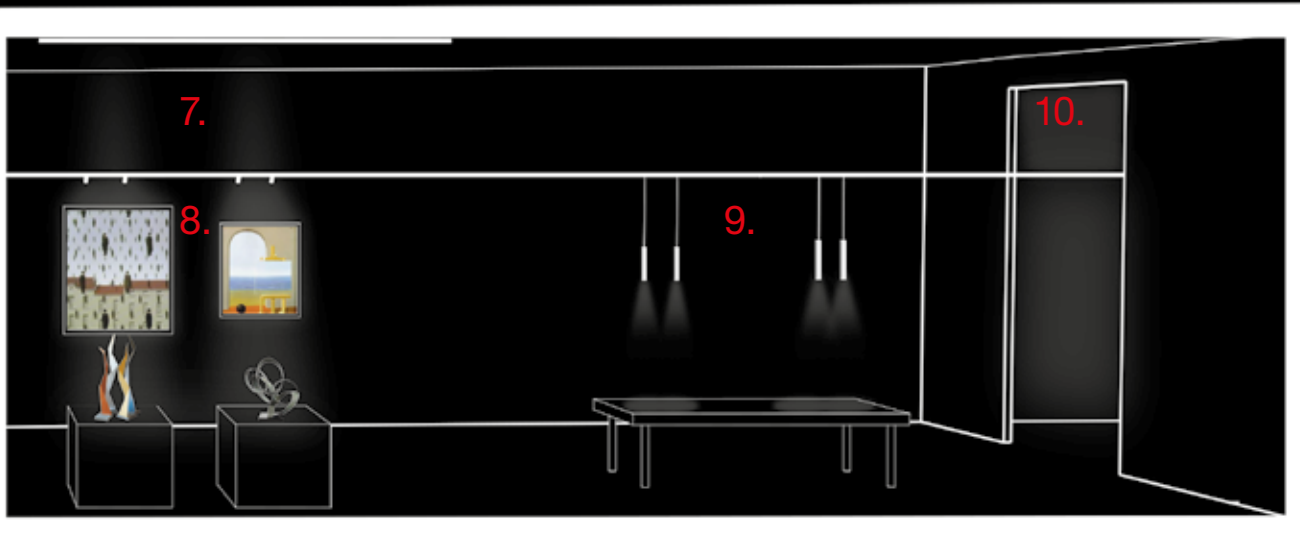

A.24

pre-configurated modules



Electrical connection



Mechanical connection

Each module (magnetic track, diffused, sharpening) is pre-configured and it is provided with:

01. the specific optical engine (magnetic, diffused, sharpening).
02. the mechanical and electrical connections to combine for a continuous run.
03. each suspension module is equipped with a suspension cable.
04. each ceiling module is equipped with 1 ceiling bracket for 1176 mm length or with 2 ceiling brackets for 2352 mm length.



Suspension cable

Ceiling bracket

Electrical connection




MAGNETIC TRACK

90° TRACK ELEMENT.

A.24 is powered by 48 Vdc

It permits long runs
in a small size 27x54 mm

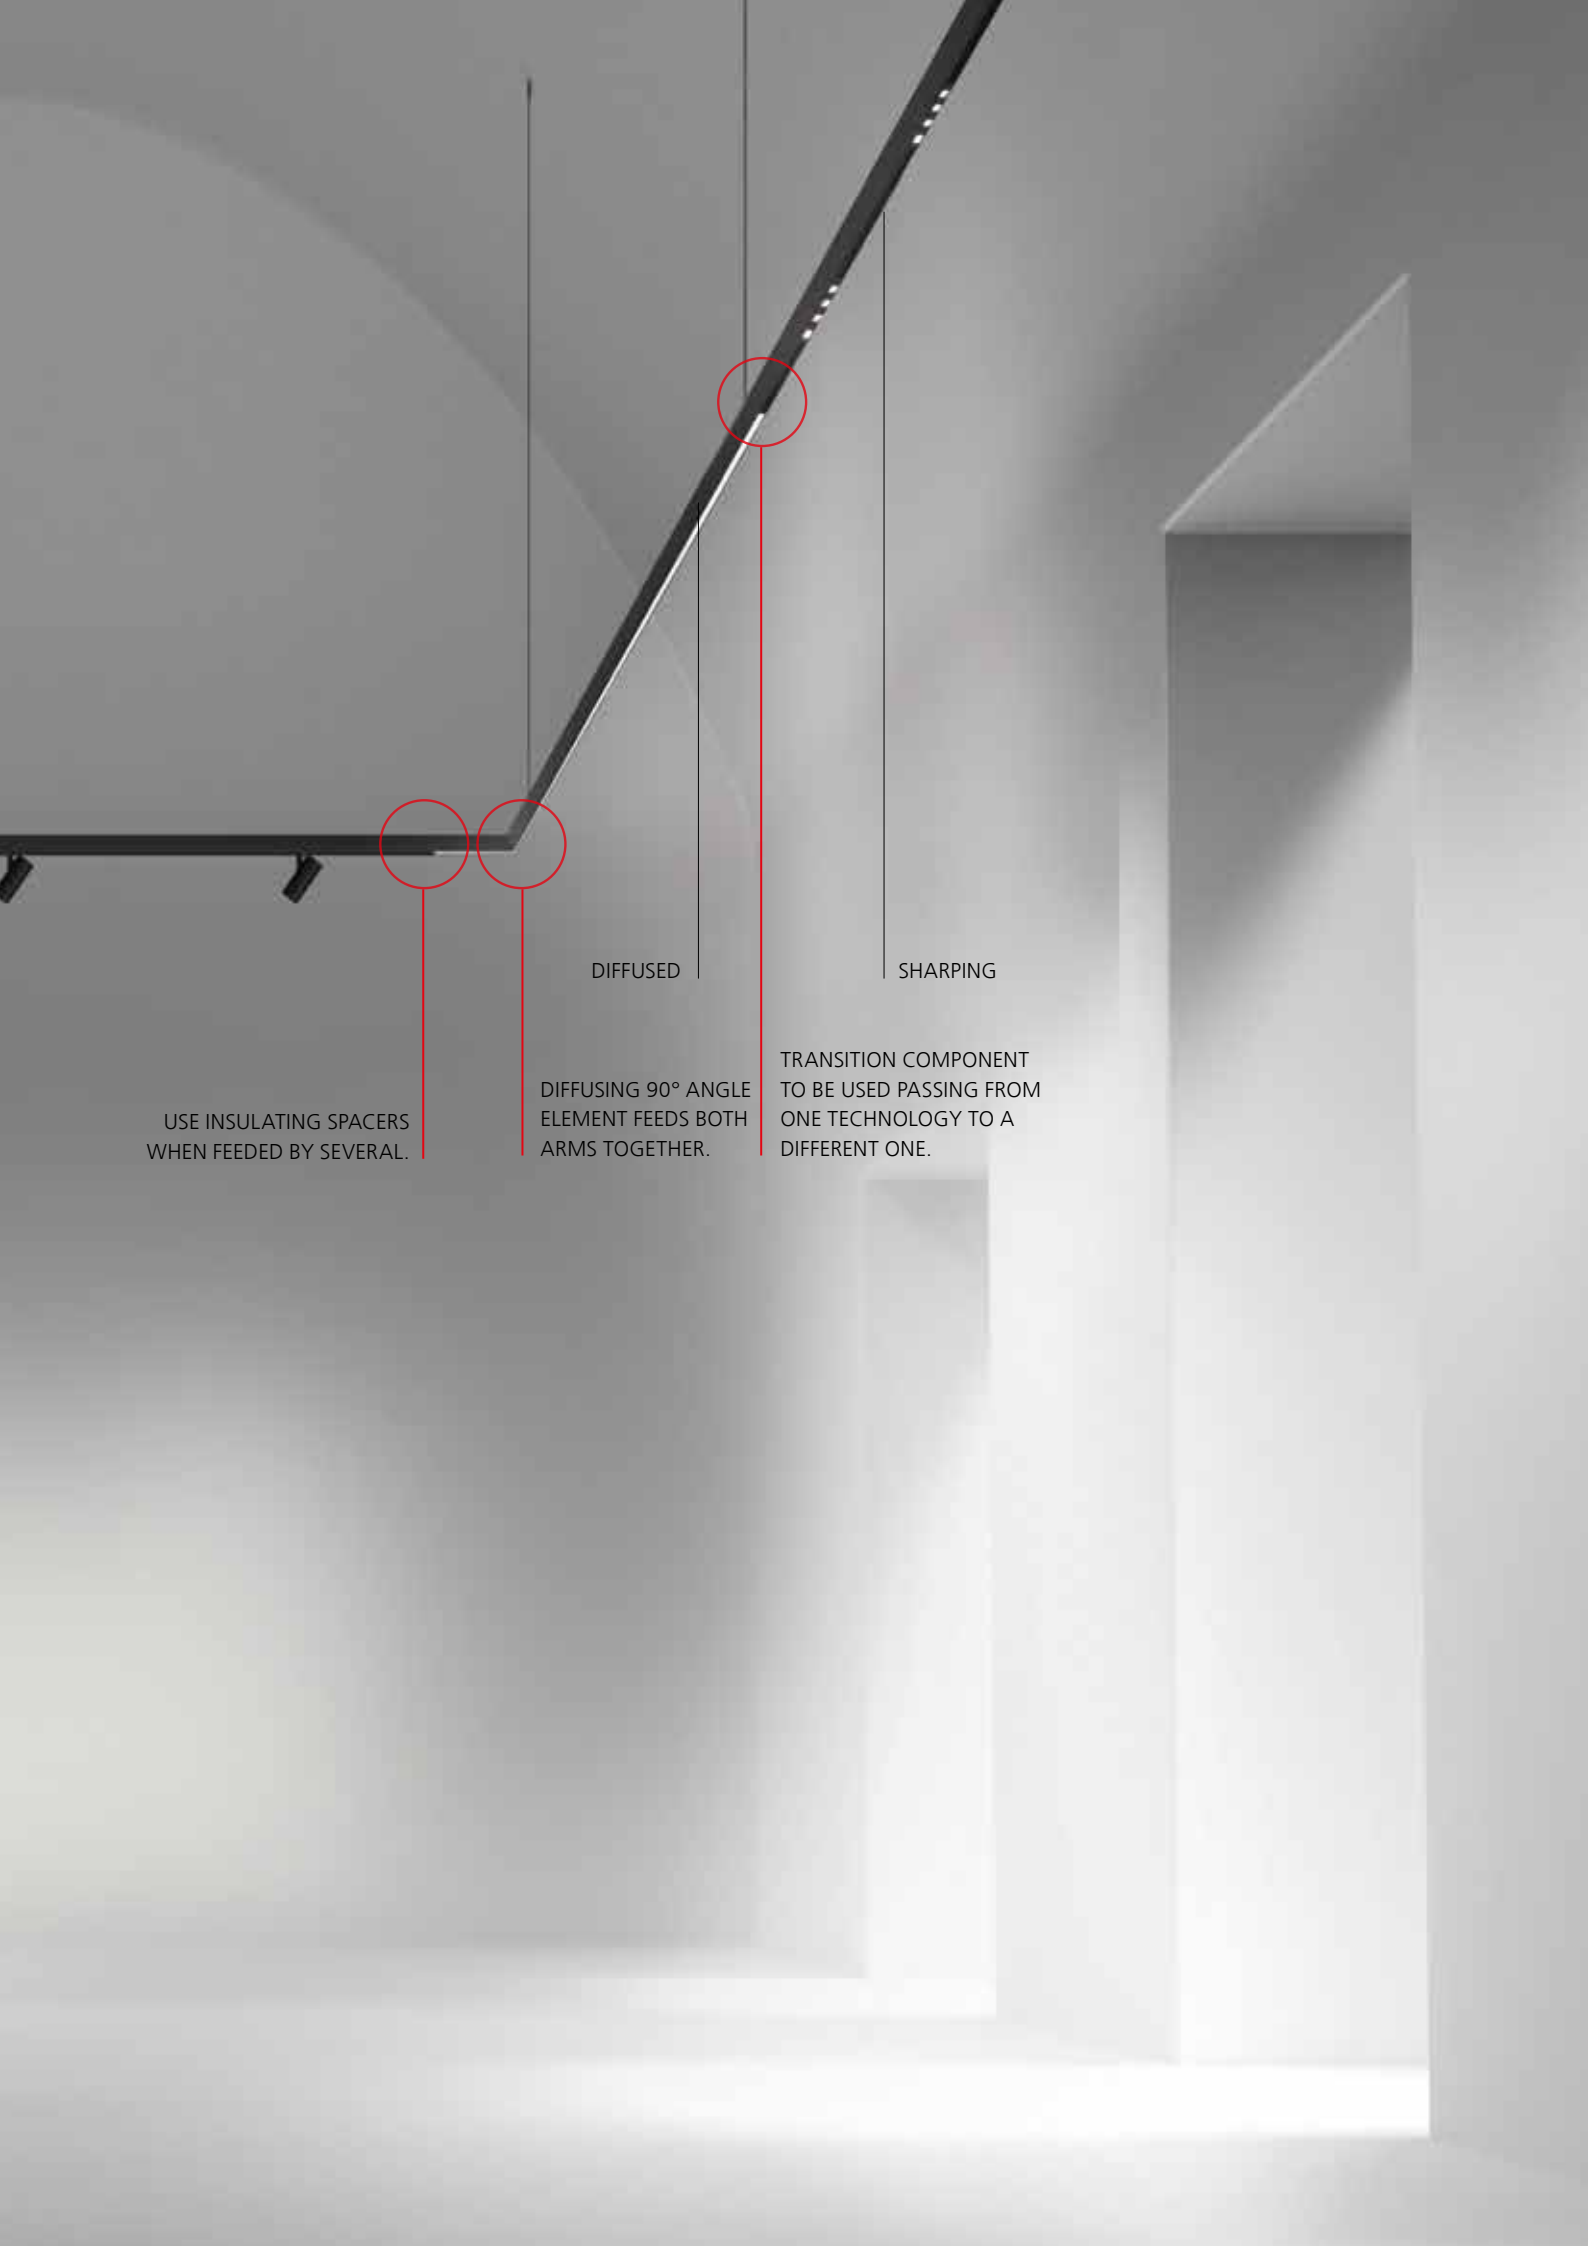

USE INSULATING SPACERS
WHEN FEEDED BY SEVERAL.

DIFFUSING 90° ANGLE
ELEMENT FEEDS BOTH
ARMS TOGETHER.

DIFFUSED

SHARPING

TRANSITION COMPONENT
TO BE USED PASSING FROM
ONE TECHNOLOGY TO A
DIFFERENT ONE.

A.24


power supply kit

POWER SUPPLY
KIT
240W - 150W

RECESSED
POWER SUPPLY
240W - 150W


REMOTE BARE
POWER SUPPLY

REMOTE BOX
POWER SUPPLY
240W - 150W

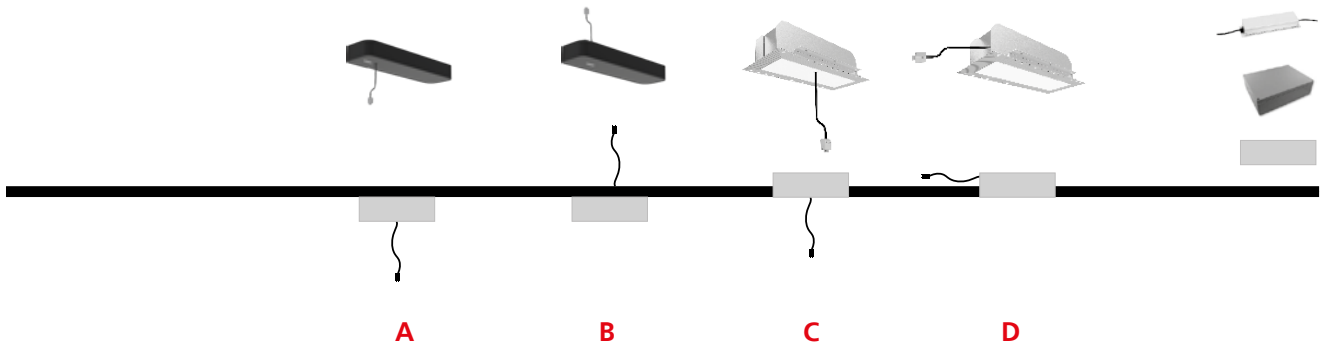


	A	B	C	D	
<p>SUSPENSION</p>	●		●		●
<p>SMD</p>		●		●	●
<p>RECESSED</p>		●		●	●


A

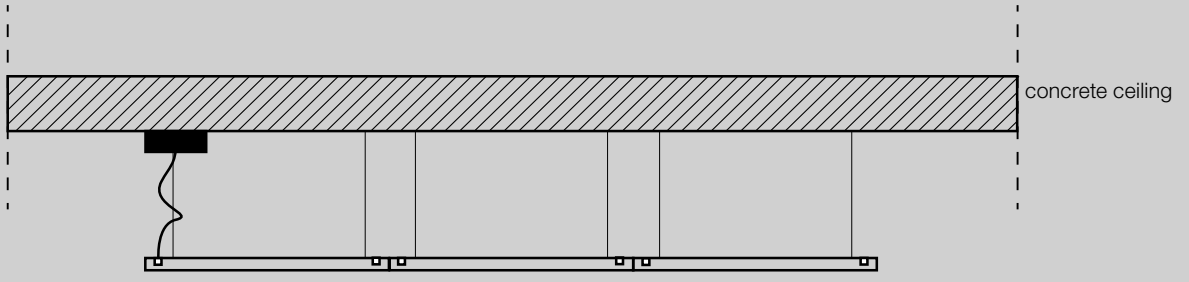


C

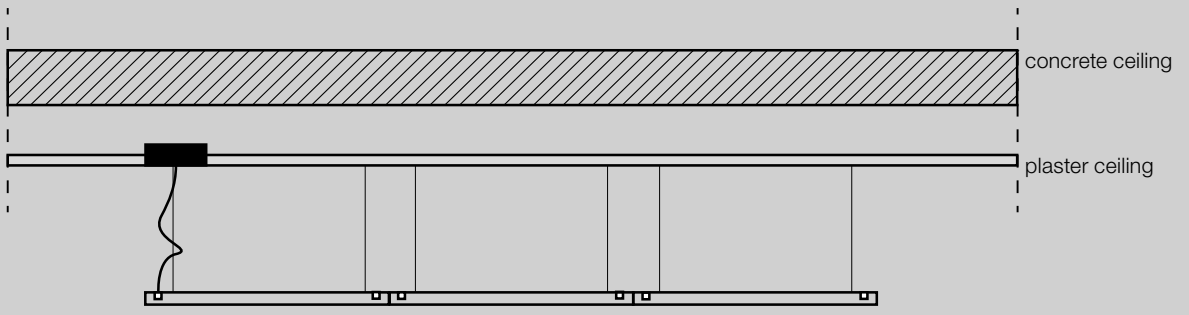


D

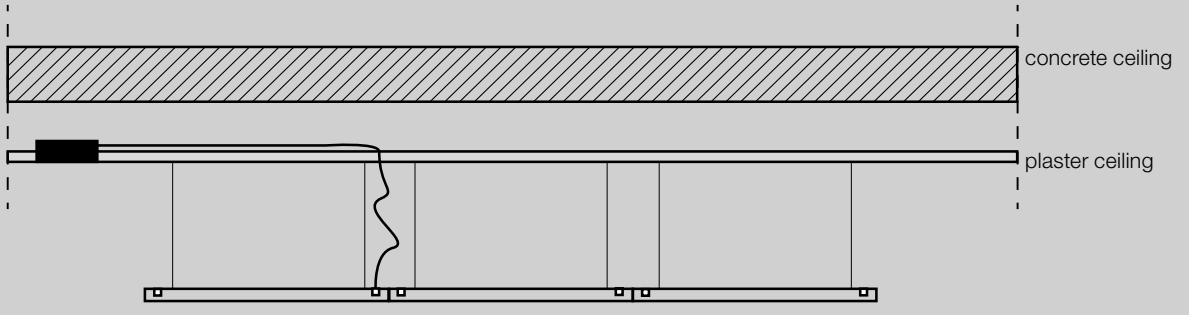


B

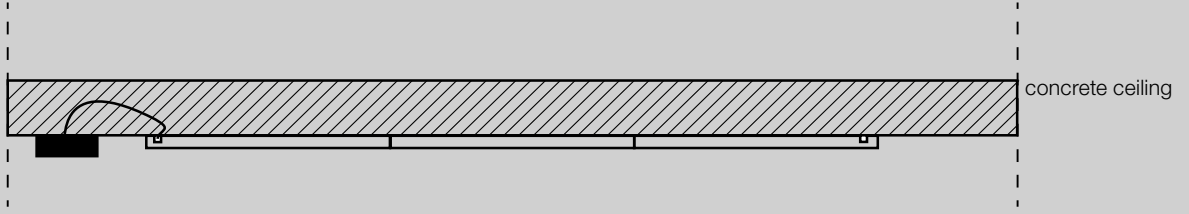

D

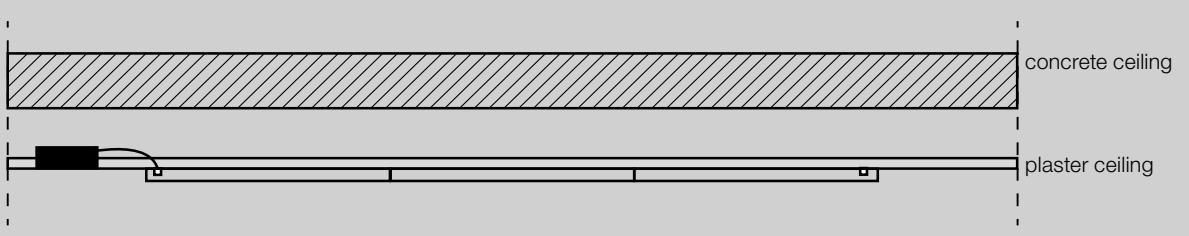

D

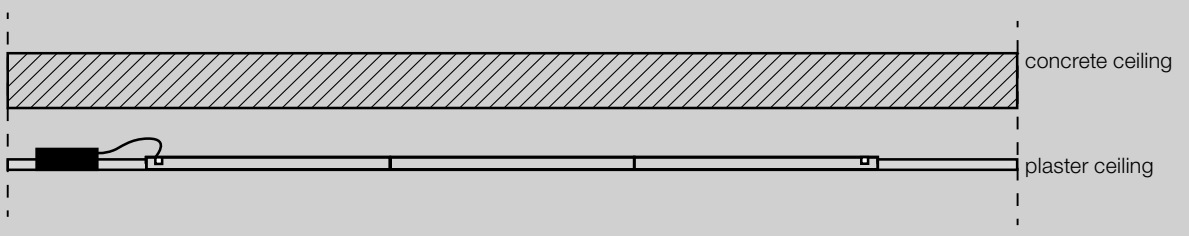

The Malcheim Experience





A.24 system





SLIGHT

APIXEME ++





A.24 RECESSED MAGNETIC TRACK

White Black



IP20




LINEAR MODULES

Length


1176 mm
2352 mm

Code

AQ150. 01/04
AQ151. 01/04



Length x 56 mm






90° ANGLES

90° on same plane track angle modules
301 x 301 mm
90° on perpendicular planes track angle modules
276x276 mm

Code

AQ155. 01/04
AQ156. 01/04



X&T JOINTS

	Dimensions
X Joint	603 x 603 mm
T Joint	603 x 315 mm

Code

AQ138. 01/04
AQ100. 01/04





CURVED MODULES

(not magnetic)

Radius	Alpha
561 mm	60°
	90°
750 mm	45°
	90°

Code

AQ500. 01/04
AQ510. 01/04
AQ520. 01/04
AQ530. 01/04





Formwork (aluminum)

Length	Radius	Alpha
Curved	561 mm	60°
		90°
	750 mm	45°
		90°

Code





AQ59000
AQ59100
AQ59200
AQ59300
AQ29400



End caps (2pcs)

Each linear, angle and curved element is provided with mechanical and electrical joints and installation accessories.
End caps have to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.

The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.

Accessories	Code	Power supply Accessory	Code
 Insulating spacer (1 pcs) use between modules powered by different power supplies	AQ152. 01/04	4pcs feed connectors (for powering multiple sections with a single power kit) Power cable, 2x0.75 + 2x0.35, mm², white, 10 m (to realize customized power cables) Power cable, 2x0.75 + 2x0.35, mm², white, 50 m (to realize customized power cables) Power cable, 2x0.75 + 2x0.35, mm², black, 10 m (to realize customized power cables) Power cable, 2x0.75 + 2x0.35, mm², black, 50 m (to realize customized power cables)	AQ90500 AQ90600 AQ90700 AQ90800 AQ90900
 End caps (2 pcs) used for linear modules, 90° angles and X&T joints	AQ153. 01/04		
 End caps (2 pcs) used for curved modules	AQ250. 01/04		
 Transition joint use between different typology modules (track-diffusing-sharpping)	AQ290. 01/04		
Power supply	Undimmable	Dimmable DALI	APP
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 Ⓢ 396x195x112h	AQ158. 01/04	AQ157. 01/04	AQ157. 01/04 APP
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 Ⓢ 396x195x112h	AQ15901	AQ16901	AQ16901APP
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 396x195x112h	AQ17801	AQ16801	AQ16801APP
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 400x110x49h	AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 400x110x49h	AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 Ⓢ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18000		
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 Ⓢ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18100		
DALI to DALI-Selv Interface 103x67x21h		DV1061	
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 Ⓢ 313x243x57,5h		AQ16800	AQ16800APP
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 Ⓢ 313x243x57,5h		AQ16000	AQ16000APP



A.24 SUSPENSION MAGNETIC TRACK

White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	*Uses 1 DALI address	IP20
------------------------------	-------------	---	----------------------	----------------------	----------------------	------

LINEAR MODULES



Length
1176 mm
2352 mm

Code
AQ400.01/04 15/18/20
AQ401.01/04 15/18/20



Direct + indirect emission modules				
Length	W	CRI	Flux	CCT
1176 mm*	14W	90	1693 lm	2700K
			1796 lm	3000K
				4000K
2352 mm*	29W	90	3386 lm	2700K
			3591 lm	3000K
				4000K



Code
AQ406.01/04 15/18/20
AQ402.01/04 15/18/20
AQ403.01/04 15/18/20
AQ407.01/04 15/18/20
AQ404.01/04 15/18/20
AQ405.01/04 15/18/20



90° ANGLES

90° suspended track corner (on same plane) 301x301 mm
--




Code
AQ492.01/04 15/18/20



X&T JOINTS

	Dimensions
X Joint	603 x 603 mm
T Joint	603 x 315 mm


Code
AQ139.01/04 15/18/20
AQ101.01/04 15/18/20

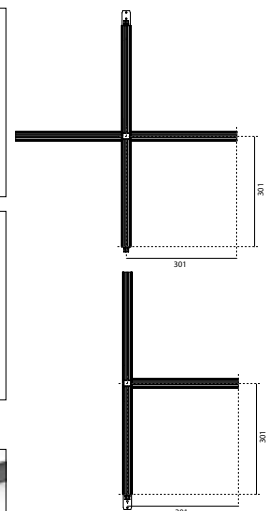

CURVED MODULES

(not magnetic)	
Radius	Alpha
561 mm	60°
	90°
750 mm	45°
	90°

Code
AQ700.01/04 15/18/20
AQ710.01/04 15/18/20
AQ720.01/04 15/18/20
AQ730.01/04 15/18/20

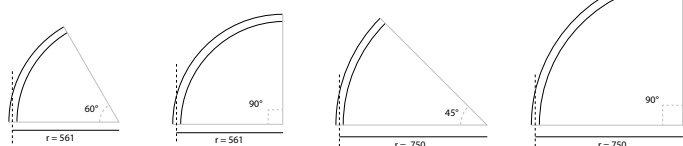


Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories. 1 suspension cable is also included.

End caps have to be ordered separately.

The APP driver can not be controlled by DALI dimming system and viceversa.


The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.

Accessories



Insulating spacer
(1 pcs) between modules powered by different power supplies

Code
AQ491. 01/04
15/18/20




End cap
(2 pcs) including 2 suspension cables 200H

Code
AQ490. 01/04
15/18/20



Transition joint
between different typology modules (track-diffusing-sharpping)

Code
AQ494. 01/04
15/18/20



Auxiliary suspension cable
(1 pcs) to be used for S-configuration

AQ49500

Power supply Accessory

4pcs feed connectors

(for powering multiple sections with a single power kit)

Power cable, 2x0.75 + 2x0.35, mm², white, 10 m
(to realize customized power cables)

Power cable, 2x0.75 + 2x0.35, mm², white, 50 m
(to realize customized power cables)

Power cable, 2x0.75 + 2x0.35, mm², black, 10 m
(to realize customized power cables)

Power cable, 2x0.75 + 2x0.35, mm², black, 50 m
(to realize customized power cables)

Code
AQ90500

AQ90600

AQ90700

AQ90800

AQ90900

Power supply

320W Recessed power supply kit
(cable length 2,2 m) for suspension modules
230VAC-48VDC IP20 ☎ 396x195x112h

Undimmable
Code
AQ158. 01/04

Dimmable DALI
Code
AQ157. 01/04

APP
Code
AQ157. 01/04 **APP**

320W Recessed power supply kit
(cable length 2,2 m) for recessed/ceiling modules
230VAC-48VDC IP20 ☎ 396x195x112h

AQ15901

AQ16901

AQ16901APP

240W Recessed power supply kit
(cable length 2,2 m) for recessed modules
230VAC-48VDC IP20 ☎ 396x195x112h

AQ17801

AQ16801

AQ16801APP

240W Power supply kit
(cable length 2,2 m) for recessed modules
230VAC-48VDC IP20 ☎ 400x110x49h

AQ173. 01/04

AQ172. 01/04

AQ172. 01/04 **APP**

150W Power supply kit
(cable length 2,2 m) for recessed modules
230VAC-48VDC IP20 ☎ 400x110x49h

AQ179. 01/04

AQ177. 01/04

AQ177. 01/04 **APP**

240W Bare power supply + plug (1 feed connector)
ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h
(for dimmable version to be combined with "DALI-Selv interface")

AQ18000

150W Bare power supply + plug (1 feed connector)
ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h
(for dimmable version to be combined with "DALI-Selv interface")

AQ18100

DALI to DALI-Selv Interface
103x67x21h

DV1061

320W Remote box power supply kit (2 feed connectors)
230VAC-48VDC IP20 ☎ 313x243x57,5h

AQ16800

AQ16800APP

240W Remote box power supply kit (2 feed connectors)
230VAC-48VDC IP20 ☎ 313x243x57,5h

AQ16000

AQ16000APP

















A.24 CEILING MAGNETIC TRACK

White	Black	Brushed Silver	Brushed Copper	Brushed Bronze	IP20 
					
01	04	15	18	20	
Fast delivery		Delivery time on demand			




LINEAR MODULES

Length	Code
1176 mm	AQ300. 01/04 15/18/20
2352 mm	AQ301. 01/04 15/18/20







90° ANGLES

90° on same plane track angle modules 301 x 301 mm	Code
90° on perpendicular planes track angle modules 330 x 330 mm	AQ392. 01/04 15/18/20
	AQ393. 01/04 15/18/20







X&T JOINTS

	Dimensions	Code
X Joint	603 x 603 mm	AQ140. 01/04 15/18/20
T Joint	603 x 315 mm	AQ102. 01/04 15/18/20







CURVED MODULES

not magnetic)		Code
Radius	Alpha	AQ600. 01/04 15/18/20
561 mm	60°	AQ610. 01/04 15/18/20
	90°	AQ620. 01/04 15/18/20
750 mm	45°	AQ630. 01/04 15/18/20
	90°	



Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories.
Bracket for fixing to ceiling is included: 1 for 1176 mm lenght or 2 for 2352 mm lenght.
End caps have to be ordered separately.

The APP driver can not be controlled by DALI dimming system and viceversa.
The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.


Accessories		Code	Power supply Accessory	Code		
	Insulating spacer (1 pcs) use between modules powered by different power supplies	AQ391. 01/04 15/18/20	4pcs feed connectors (for powering multiple sections with a single power kit) Power cable, 2x0.75 + 2x0.35, mm², white, 10 m (to realize customized power cables) Power cable, 2x0.75 + 2x0.35, mm², white, 50 m (to realize customized power cables) Power cable, 2x0.75 + 2x0.35, mm², black, 10 m (to realize customized power cables) Power cable, 2x0.75 + 2x0.35, mm², black, 50 m (to realize customized power cables)	AQ90500 AQ90600 AQ90700 AQ90800 AQ90900		
	End caps (2 pcs)	AQ390. 01/04 15/18/20				
	Cap for cable passage (1 pcs)	AQ395. 01/04 15/18/20				
	Transition joint use between different typology modules (track-diffusing-sharping)	AQ394. 01/04 15/18/20				
Power supply	Undimmable	Code	Dimmable DALI	Code	APP	Code
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 Ⓟ 396x195x112h	AQ158. 01/04		AQ157. 01/04		AQ157. 01/04 APP	
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 Ⓟ 396x195x112h	AQ15901		AQ16901		AQ16901APP	
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓟ 396x195x112h	AQ17801		AQ16801		AQ16801APP	
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓟ 400x110x49h	AQ173. 01/04		AQ172. 01/04		AQ172. 01/04 APP	
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓟ 400x110x49h	AQ179. 01/04		AQ177. 01/04		AQ177. 01/04 APP	
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 Ⓟ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18000					
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 Ⓟ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18100					
DALI to DALI-Selv Interface 103x67x21h			DV1061			
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 Ⓟ 313x243x57,5h			AQ16800		AQ16800APP	
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 Ⓟ 313x243x57,5h			AQ16000		AQ16000APP	

VECTOR MAGNETIC TRACK

White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	SP 	FL 	WF 	Delivery time on demand 2700K - 4000K	MacAdam 3SDCM *MacAdam 2SDCM CRI = 90	IP20 90° 360°
------------------------------	-------------	---	----------------------	----------------------	--------	--------	--------	--	---	-------------------------

VECTOR 30 MAGNETIC


W	Beam	Flux	CCT	Dimmable DALI Code
6,5 W	SP 12°	329 lm	2700K	AP811. 01/04 15/18/20
			3000K	AP801. 01/04 15/18/20
			4000K	AP851. 01/04 15/18/20
7 W	FL 16°	335 lm	2700K	AP812. 01/04 15/18/20
			3000K	AP802. 01/04 15/18/20
			4000K	AP852. 01/04 15/18/20
	WF 30°	292 lm	2700K	AP813. 01/04 15/18/20
			3000K	AP803. 01/04 15/18/20
			4000K	AP853. 01/04 15/18/20



Life L70 (6K) 36000h

VECTOR 40 MAGNETIC

W	Beam	Flux	CCT	Dimmable DALI Code
9 W	SP 14°	544 lm	2700K	AP011. 01/04 15/18/20
			3000K	AP001. 01/04 15/18/20
			4000K	AP051. 01/04 15/18/20
	*FL 21°	543 lm	2700K	AP012. 01/04 15/18/20
			3000K	AP002. 01/04 15/18/20
			4000K	AP052. 01/04 15/18/20
	584 lm	3000K	AP002. 01/04 15/18/20	
		4000K	AP052. 01/04 15/18/20	
		*WF 28°	491 lm	2700K
	3000K			AP003. 01/04 15/18/20
	4000K			AP053. 01/04 15/18/20



Life L70 (9K) 50000h



ADAPTER COLOR					
ARM COLOR					
HEAT-SINK COLOR					
BODY COLOR					
ANTI GLARE COLOR					
ACCESSORIES COLOR (visible ones)					

VECTOR MAGNETIC TRACK


White	Black	Brushed Silver	Brushed Copper	Brushed Bronze	SP	FL	WF	Delivery time on demand 2700K - 4000K	MacAdam 3SDCM CRI = 90	IP20 90° 360°
01	04	15	18	20						
Fast delivery		Delivery time on demand								

VECTOR 55 MAGNETIC

W	Beam	Flux	CCT	Dimmable DALI Code
19 W	SP 15°	1677 lm	2700K	AP111. 01/04 15/18/20
		1771 lm	3000K	AP101. 01/04 15/18/20
		1915 lm	4000K	AP151. 01/04 15/18/20
	FL 22°	1715 lm	2700K	AP112. 01/04 15/18/20
		1811 lm	3000K	AP102. 01/04 15/18/20
		1959 lm	4000K	AP152. 01/04 15/18/20
	WF 31°	1779 lm	2700K	AP113. 01/04 15/18/20
		1878 lm	3000K	AP103. 01/04 15/18/20
		2032 lm	4000K	AP153. 01/04 15/18/20



Life L70 (9K) 50000h




VECTOR 55 ZOOM MAGNETIC

W	Beam	Flux	CCT	Dimmable DALI Code
16 W	FL 22°-WF 31°	603 - 1039 lm	2700K	AP114. 01/04 15/18/20
		637 - 1098 lm	3000K	AP104. 01/04 15/18/20
		688 - 1187 lm	4000K	AP154. 01/04 15/18/20



Life L70 (9K) 50000h







Accessoires

	Color	Vector 40 Code	Vector 55 Code
	●	AP90100	AP91100
		AP90200	AP91200
		AP90300	AP91300*
	●	AP90400	AP91400
	●		AP91500


* Cannot be used with brushed silver finishing (n.15 finishing)

VECTOR PENDANT SECURLOCK

White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	SP 	FL 	WF 	Delivery time on demand 2700K - 4000K	MacAdam 3SDCM *MacAdam 2SDCM CRI = 90	IP20 
------------------------------	-------------	---	----------------------	----------------------	---	---	---	--	---	---

VECTOR 30 PENDANT SECURLOCK


W	Beam	Flux	CCT	Dimmable DALI Code	
6,5 W	SP 12°	329 lm	2700K	AP411. 01/04 15/18/20	
			3000K	AP401. 01/04 15/18/20	
			4000K	AP451. 01/04 15/18/20	
	7 W	FL 16°	335 lm	2700K	AP412. 01/04 15/18/20
				3000K	AP402. 01/04 15/18/20
				4000K	AP452. 01/04 15/18/20
		WF 30°	292 lm	2700K	AP413. 01/04 15/18/20
				3000K	AP403. 01/04 15/18/20
				4000K	AP453. 01/04 15/18/20

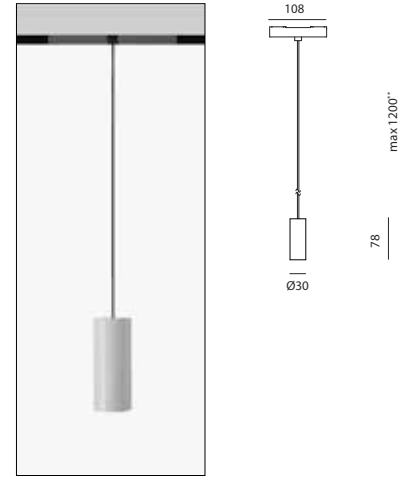

Life L70 (6K) 36000h










VECTOR 40 PENDANT SECURLOCK

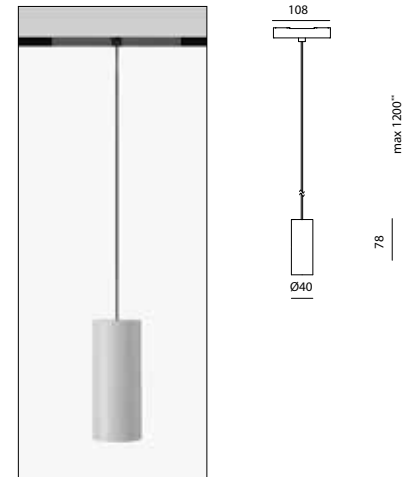W	Beam	Flux	CCT	Dimmable DALI Code	
9 W	SP 14°	544 lm	2700K	AP211. 01/04 15/18/20	
			3000K	AP201. 01/04 15/18/20	
			4000K	AP251. 01/04 15/18/20	
	*FL 21°	543 lm	2700K	AP212. 01/04 15/18/20	
			3000K	AP202. 01/04 15/18/20	
			4000K	AP252. 01/04 15/18/20	
		*WF 28°	491 lm	2700K	AP213. 01/04 15/18/20
				3000K	AP203. 01/04 15/18/20
				4000K	AP253. 01/04 15/18/20




Life L70 (9K) 50000h

VECTOR PENDANT SECURLOCK


White	Black	Brushed Silver	Brushed Copper	Brushed Bronze	SP	FL	WF	Delivery time on demand 2700K - 4000K	MacAdam 3SDCM CRI = 90	IP20
										
01	04	15	18	20						
Fast delivery		Delivery time on demand								

VECTOR 55 PENDANT SECURLOCK

W	Beam	Flux	CCT	Dimmable DALI Code
19 W	SP 15°	1677 lm	2700K	AP311. 01/04 15/18/20
		1771 lm	3000K	AP301. 01/04 15/18/20
		1915 lm	4000K	AP351. 01/04 15/18/20
	FL 22°	1715 lm	2700K	AP312. 01/04 15/18/20
		1811 lm	3000K	AP302. 01/04 15/18/20
		1959 lm	4000K	AP352. 01/04 15/18/20
	WF 31°	1779 lm	2700K	AP313. 01/04 15/18/20
		1878 lm	3000K	AP303. 01/04 15/18/20
		2032 lm	4000K	AP353. 01/04 15/18/20

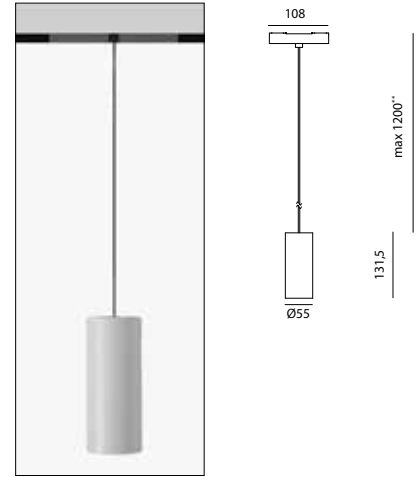

Life L70 (9K) 50000h

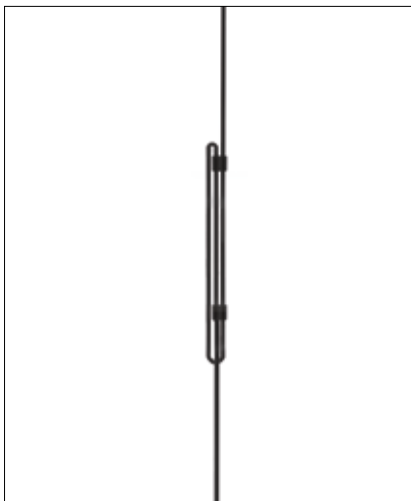

** No cuttable wire. Clips included to adjust the length.


A.24 WALL WASHER

White Black



Fast delivery

Brushed Silver Brushed Copper Brushed Bronze







Delivery time on demand

MacAdam 3SDCM IP20
Life L70 (6K) 50000h
CRI = 90

Length	W	Flux	CCT
600 mm	11W	1038 lm	2700K
		1070 lm	3000K
		1145 lm	4000K
1200 mm	21W	2076 lm	2700K
		2140 lm	3000K
		2290 lm	4000K

Code
WW101. 01/04 15/18/20
WW111. 01/04 15/18/20
WW121. 01/04 15/18/20
WW142. 01/04 15/18/20
WW152. 01/04 15/18/20
WW162. 01/04 15/18/20









A.24 RECESSED DIFFUSED EMISSION

White



01

*Uses 1 DALI address
** Uses 2 DALI addresses


MacAdam 3SDCM
Life L70 (17k)>102000h
CRI = 90

IP20



Formwork (aluminum)		
Length	Radius	Alpha
Linear 1176 mm		
Linear 2352 mm		
90° angle on the same plane		
90° angle on perpendicular		
X joint		
T joint		
Curved	561 mm	60°
	750 mm	90°
		45°
		90°
End caps (2pcs)		

Code
AQ29100
AQ29200
AQ29300
AQ29500
AQ00020
AQ00010
AQ59000
AQ59100
AQ59200
AQ59300
AQ29400




Length x 56 mm

LINEAR MODULES

Linear direct emission modules			
Length	W	Flux ¹	CCT
1176 mm*	29W	3222 lm	2700K
		3418 lm	3000K
		3418 lm	4000K
2352 mm**	58W	6445 lm	2700K
		6836 lm	3000K
		6836 lm	4000K
		6836 lm	4000K




Code
AQ27001
AQ20001
AQ20101
AQ27101
AQ20201
AQ20301



90° ANGLES

	W	Flux ¹	CCT
90° on same plane angle direct emission modules	14W	1611 lm	2700K
		1709 lm	3000K
		1709 lm	4000K
90° on perpendicular plane angle direct emission modules	14W	1611 lm	2700K
		1709 lm	3000K
		1709 lm	4000K

Code
AQ27201
AQ20401
AQ20501
AQ27301
AQ20701
AQ20801



X&T JOINTS






	W	Flux ¹	CCT
X Joint	29 W	3002 lm	2700K
		3184 lm	3000K
		3184 lm	4000K
T Joint	22 W	2286 lm	2700K
		2424 lm	3000K
		2424 lm	4000K

Code
AQ14701
AQ14801
AQ14901
AQ11601
AQ11701
AQ11801

CURVED MODULES

Curved direct emission modules				
Radius	Alpha	W	Flux ¹	CCT
561 mm*	60°	14W	1421 lm	2700K
			1507 lm	3000K
			1507 lm	4000K
	90°	22W	2132 lm	2700K
			2261 lm	3000K
			2261 lm	4000K
750 mm*	45°	14W	1421 lm	2700K
			1507 lm	3000K
			1507 lm	4000K
	90°	29W	2842 lm	2700K
			3015 lm	3000K
			3015 lm	4000K






Code
AQ50701
AQ50101
AQ50201
AQ51701
AQ51101
AQ51201
AQ52701
AQ52101
AQ52201
AQ53701
AQ53101
AQ53201




¹ Direct luminous flux: measured using white body.
With black body -17% output flux.

Each formwork module is provided with a mechanical joint to connect two recessed coplanar formwork modules.
Each module, angle and curved modules are provided with mechanical and electrical joints and installation accessories.
End caps have to be ordered separately.

Opal diffusing screen has to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.
The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.

Accessories		Code	Power supply Accessory	Code
	Insulating spacer (1 pcs) between modules powered by different power supplies	AQ20601	4pcs feed connectors (for powering multiple sections with a single power kit)	AQ90500
	End caps (2 pcs)	AQ25001	Power cable, 2x0.75 + 2x0.35, mm², white, 10 m (to realize customized power cables)	AQ90600
	Transition joint use between different typology modules (track-diffusing-sharping)	AQ29001	Power cable, 2x0.75 + 2x0.35, mm², white, 50 m (to realize customized power cables)	AQ90700
	Opal diffusing screen 10 m 25 m 50 m 1176 mm 2352 mm 3528 mm	AQ16200 AQ16300 AQ16400 AQ16500 AQ16600 AQ16700	Power cable, 2x0.75 + 2x0.35, mm², black, 10 m (to realize customized power cables)	AQ90800
	Flexible opal diffusing screen 5 m 10 m 25 m 50 m	AQ90300 AQ90000 AQ90100 AQ90200	Power cable, 2x0.75 + 2x0.35, mm², black, 50 m (to realize customized power cables)	AQ90900
Power supply		Undimmable	Dimmable DALI	APP
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 Ⓢ 396x195x112h		Code AQ158. 01/04	Code AQ157. 01/04	Code AQ157. 01/04 APP
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 Ⓢ 396x195x112h		AQ15901	AQ16901	AQ16901APP
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 396x195x112h		AQ17801	AQ16801	AQ16801APP
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 400x110x49h		AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 400x110x49h		AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 Ⓢ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")		AQ18000		
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 Ⓢ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")		AQ18100		
DALI to DALI-Selv Interface 103x67x21h			DV1061	
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 Ⓢ 313x243x57,5h			AQ16800	AQ16800APP
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 Ⓢ 313x243x57,5h			AQ16000	AQ16000APP


A.24 SUSPENSION DIFFUSED EMISSION

White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	*Uses 1 DALI address ** Uses 2 DALI addresses *** Uses 3 DALI addresses	MacAdam 3SDCM Life L70 (17k)>102000h CRI = 90	IP20 
------------------------------	-------------	---	----------------------	----------------------	---	---	---

LINEAR MODULES


Length	W	Flux ¹	CCT
1176 mm*	29W	3222 lm	2700K
		3418 lm	3000K
		3418 lm	4000K
2352 mm**	58W	6445 lm	2700K
		6836 lm	3000K
		6836 lm	4000K

Code
AQ416. 01/04 15/18/20
AQ410. 01/04 15/18/20
AQ411. 01/04 15/18/20
AQ417. 01/04 15/18/20
AQ412. 01/04 15/18/20
AQ413. 01/04 15/18/20



Direct + indirect emission modules			
Length	W	Flux ¹	CCT
1176 mm**	29W direct	3222 lm direct	2700K
		1694 lm indirect	
	14W indirect	3418 lm direct	3000K
		1796 lm indirect	
		3418 lm direct	4000K
2352 mm***	58W direct	6445 lm direct	2700K
		3386 lm indirect	
	29W indirect	6836 lm direct	3000K
		3591 lm indirect	
		6836 lm direct	4000K
3591 lm indirect			



Code
AQ464. 01/04 15/18/20
AQ460. 01/04 15/18/20
AQ461. 01/04 15/18/20
AQ465. 01/04 15/18/20
AQ462. 01/04 15/18/20
AQ463. 01/04 15/18/20



90° ANGLES

90° angle direct emission modules			
	W	Flux ¹	CCT
90° on same plane angle modules 301 x 301 mm*	14W	1611 lm	2700K
		1709 lm	3000K
		1709 lm	4000K




Code
AQ418. 01/04 15/18/20
AQ414. 01/04 15/18/20
AQ415. 01/04 15/18/20



X&T JOINTS

X & T Joints			
	W	Flux ¹	CCT
X Joint	29 W	3002 lm	2700K
		3184 lm	3000K
		3184 lm	4000K
T Joint	22 W	2286 lm	2700K
		2424 lm	3000K
		2424 lm	4000K

Code
AQ144. 01/04 15/18/20
AQ145. 01/04 15/18/20
AQ146. 01/04 15/18/20
AQ113. 01/04 15/18/20
AQ114. 01/04 15/18/20
AQ115. 01/04 15/18/20

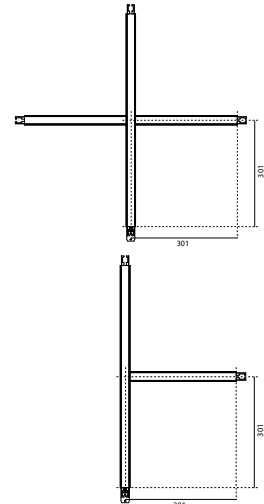


¹ Direct luminous flux: measured using white body.
With black body -17% output flux.

Each module, angle and curved modules are provided with mechanical and electrical joints and installation accessories.
 1 suspension cable is also included.
 End caps have to be ordered separately.
 Opal diffusing screen has to be ordered separately.

The APP driver can not be controlled by DALI dimming system and viceversa.

CURVED MODULES

Radius	Alpha	W	Flux ¹	CCT	Code
561 mm*	60°	14W	1421 lm	2700K	AQ707. 01/04 15/18/20
			1507 lm	3000K	AQ701. 01/04 15/18/20
			1507 lm	4000K	AQ702. 01/04 15/18/20
	90°	22W	2132 lm	2700K	AQ717. 01/04 15/18/20
			2261 lm	3000K	AQ711. 01/04 15/18/20
			2261 lm	4000K	AQ712. 01/04 15/18/20
750 mm*	45°	14W	1421 lm	2700K	AQ727. 01/04 15/18/20
			1507 lm	3000K	AQ721. 01/04 15/18/20
			1507 lm	4000K	AQ722. 01/04 15/18/20
	90°	29W	2842 lm	2700K	AQ737. 01/04 15/18/20
			3015 lm	3000K	AQ731. 01/04 15/18/20
			3015 lm	4000K	AQ732. 01/04 15/18/20

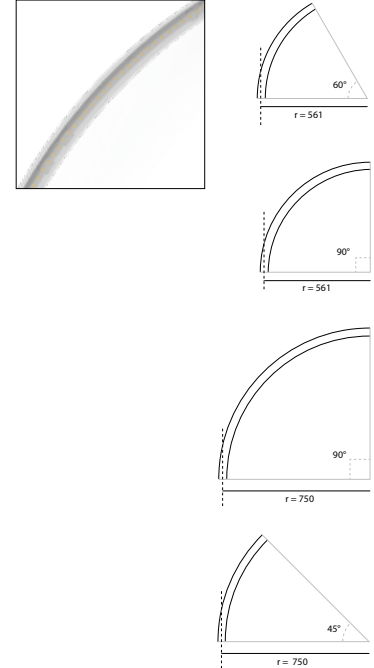

¹ Direct luminous flux: measured using white body.
 With black body -17% output flux.

A.24 SUSPENSION DIFFUSED EMISSION OPAL AND FLEXIBLE OPAL DIFFUSER SCREEN COMPARISON

LINEAR MODULES

Emission		White body + diffuser cod. AQ16...	White body + flexible diffuser cod. AQ90...	Black body + diffuser cod. AQ16...	Black body + flexible diffuser cod. AQ90...
1176 mm					
2700K	Direct	3222 lm	2842 lm	2680 lm	2232 lm
	Direct + Indirect	4916 lm	4535 lm	4066 lm	3617 lm
3000K	Direct	3418 lm	3015 lm	2843 lm	2367 lm
	Direct + Indirect	5214 lm	4810 lm	4312 lm	3837 lm
4000K	Direct	3418 lm	3015 lm	2843 lm	2367 lm
	Direct + Indirect	5214 lm	4811 lm	4313 lm	3837 lm
2352 mm					
2700K	Direct	6445 lm	5685 lm	5361 lm	4464 lm
	Direct + Indirect	9831 lm	9071 lm	8132 lm	7235 lm
3000K	Direct	6836 lm	6029 lm	5685 lm	4734 lm
	Direct + Indirect	10427 lm	9621 lm	8624 lm	7673 lm
4000K	Direct	6836 lm	6029 lm	5685 lm	4734 lm
	Direct + Indirect	10427 lm	9621 lm	8624 lm	7673 lm

ANGULAR MODULES

Emission		White body + diffuser cod. AQ16...	White body + flexible diffuser cod. AQ90...	Black body + diffuser cod. AQ16...	Black body + flexible diffuser cod. AQ90...
90° Angle					
2700K	Direct	1611 lm	1421 lm	1340 lm	1116 lm
3000K	Direct	1709 lm	1507 lm	1421 lm	1184 lm
4000K	Direct	1709 lm	1507 lm	1421 lm	1184 lm

FLEXIBLE OPAL DIFFUSER SCREEN

CURVED MODULES 561 mm

	Emission	White body + flexible diffuser cod. AQ90...	Black body + flexible diffuser cod. AQ90...
60°			
2700K	Direct	1421 lm	1116 lm
3000K	Direct	1507 lm	1184 lm
4000K	Direct	1507 lm	1184 lm
90°			
2700K	Direct	2132 lm	1674 lm
3000K	Direct	2261 lm	1775 lm
4000K	Direct	2261 lm	1775 lm







CURVED MODULES 750 mm






	Emission	White body + flexible diffuser cod. AQ90...	Black body + flexible diffuser cod. AQ90...
45°			
2700K	Direct	1421 lm	1116 lm
3000K	Direct	1507 lm	1184 lm
4000K	Direct	1507 lm	1184 lm
90°			
2700K	Direct	2842 lm	2232 lm
3000K	Direct	3015 lm	2367 lm
4000K	Direct	3015 lm	2367 lm

Flux for Silver body is the same of White body.

Flux for Copper and Bronze body is the same of Black body.

A.24 SUSPENSION DIFFUSED EMISSION

White  01 Fast delivery	Black  04	Brushed Silver  15	Brushed Copper  18	Brushed Bronze  20	Delivery time on demand	*Uses 1 DALI address ** Uses 2 DALI addresses *** Uses 3 DALI addresses	IP20 
--	---	--	--	--	-------------------------	---	---

Accessories	Code	Power supply Accessory	Code
 Insulating spacer (1 pcs) between modules powered by different power supplies	AQ452. 01/04 15/18/20	4pcs feed connectors (for powering multiple sections with a single power kit) Power cable, 2x0.75 + 2x0.35, mm², white, 10 m (to realize customized power cables) Power cable, 2x0.75 + 2x0.35, mm², white, 50 m (to realize customized power cables) Power cable, 2x0.75 + 2x0.35, mm², black, 10 m (to realize customized power cables) Power cable, 2x0.75 + 2x0.35, mm², black, 50 m (to realize customized power cables)	AQ90500 AQ90600 AQ90700 AQ90800 AQ90900
 End caps (2 pcs) including 2 suspension cables 200H	AQ451. 01/04 15/18/20		
 Transition joint use between different typology modules (track-diffusing-sharping)	AQ494. 01/04 15/18/20		
 Opal diffusing screen 10 m 25 m 50 m 1176 mm 2352 mm 3528 mm	AQ16200 AQ16300 AQ16400 AQ16500 AQ16600 AQ16700		
Flexible opal diffusing screen 5 m 10 m 25 m 50 m	AQ90300 AQ90000 AQ90100 AQ90200		
 Auxiliary suspension cable (1 pcs) to be used for S-configuration	AQ49500		

Each module, angle and curved modules are provided with mechanical and electrical joints and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately.

The APP driver can not be controlled by DALI dimming system and viceversa. The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.


Power supply	Undimmable Code	Dimmable DALI Code	APP Code
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 Ⓢ 396x195x112h	AQ158. 01/04	AQ157. 01/04	AQ157. 01/04 APP
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 Ⓢ 396x195x112h	AQ15901	AQ16901	AQ16901APP
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 396x195x112h	AQ17801	AQ16801	AQ16801APP
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 400x110x49h	AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 400x110x49h	AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 Ⓢ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18000		
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 Ⓢ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18100		
DALI to DALI-Selv Interface 103x67x21h		DV1061	
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 Ⓢ 313x243x57,5h		AQ16800	AQ16800APP
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 Ⓢ 313x243x57,5h		AQ16000	AQ16000APP

A.24 CEILING - WALL DIFFUSED EMISSION

White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	*Uses 1 DALI address ** Uses 2 DALI addresses	MacAdam 3SDCM Life L70 (17k)>102000h CRI = 90	IP20
------------------------------	-------------	---	----------------------	----------------------	--	---	----------



LINEAR MODULES

Length	W	Flux ¹	CCT	Code
1176 mm*	29W	3222 lm	2700K	AQ370. 01/04 15/18/20
		3418 lm	3000K	AQ310. 01/04 15/18/20
		3418 lm	4000K	AQ311. 01/04 15/18/20
2352 mm**	58W	6445 lm	2700K	AQ371. 01/04 15/18/20
		6836 lm	3000K	AQ312. 01/04 15/18/20
		6836 lm	4000K	AQ313. 01/04 15/18/20





90° ANGLES

	W	Flux ¹	CCT	Code
90° on same plane angle modules 301 x 301 mm*	14W	1611 lm	2700K	AQ372. 01/04 15/18/20
		1709 lm	3000K	AQ314. 01/04 15/18/20
		1709 lm	4000K	AQ315. 01/04 15/18/20






	W	Flux ¹	CCT	Code
90° on perpendicular planes angle modules 330 x 330 mm*	14W	1611 lm	2700K	AQ373. 01/04 15/18/20
		1709 lm	3000K	AQ316. 01/04 15/18/20
		1709 lm	4000K	AQ317. 01/04 15/18/20



X&T JOINTS

	W	Flux ¹	CCT	Code
X Joint	29 W	3002 lm	2700K	AQ147. 01/04 15/18/20
		3184 lm	3000K	AQ148. 01/04 15/18/20
		3184 lm	4000K	AQ149. 01/04 15/18/20
T Joint	22 W	2286 lm	2700K	AQ116. 01/04 15/18/20
		2424 lm	3000K	AQ117. 01/04 15/18/20
		2424 lm	4000K	AQ118. 01/04 15/18/20




¹ Direct luminous flux: measured using white body.
With black body -17% output flux.

Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories.
 Bracket for fixing to ceiling is included: 1 for 1176 mm lenght. 2 for 2352 mm lenght.
 End caps have to be ordered separately.

Opal diffusing screen has to be ordered separately.
 The APP driver can not be controlled by DALI dimming system and viceversa.



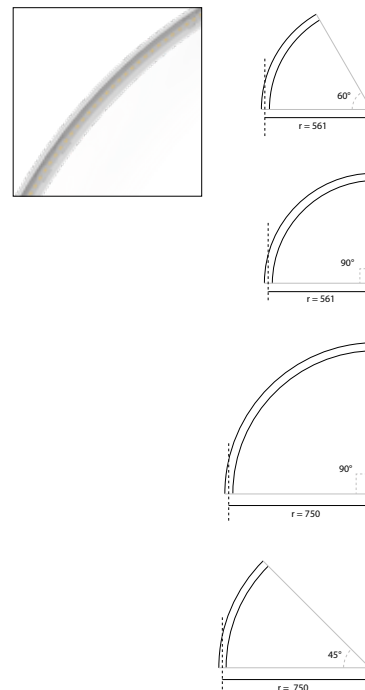


CURVED MODULES

Radius	Alpha	W	Flux ¹	CCT	Code
561 mm*	60°	14W	1421 lm	2700K	AQ607. 01/04 15/18/20
			1507 lm	3000K	AQ601. 01/04 15/18/20
			1507 lm	4000K	AQ602. 01/04 15/18/20
	90°	22W	2132 lm	2700K	AQ617. 01/04 15/18/20
			2261 lm	3000K	AQ611. 01/04 15/18/20
			2261 lm	4000K	AQ612. 01/04 15/18/20
750 mm*	45°	14W	1421 lm	2700K	AQ627. 01/04 15/18/20
			1507 lm	3000K	AQ621. 01/04 15/18/20
			1507 lm	4000K	AQ622. 01/04 15/18/20
	90°	29W	2842 lm	2700K	AQ637. 01/04 15/18/20
			3015 lm	3000K	AQ631. 01/04 15/18/20
			3015 lm	4000K	AQ632. 01/04 15/18/20




¹ Direct luminous flux: measured using white body.
 With black body -17% output flux.

A.24 CEILING - WALL DIFFUSED EMISSION

White	Black	Brushed Silver	Brushed Copper	Brushed Bronze
				
01	04	15	18	20
Fast delivery		Delivery time on demand		

Accessories




Insulating spacer
(1 pc) between modules
powered by different power
supplies

Code
AQ351. 01/04
15/18/20



End cap
(2 pcs)

AQ350. 01/04
15/18/20



Cap for cable passage
(1 pcs)

AQ353. 01/04
15/18/20



Transition cap
track - diffusing
track - sharpening
diffusing - sharpening

AQ394. 01/04
15/18/20



Opal diffusing screen

10 m
25 m
50 m
1176 mm
2352 mm
3528 mm

AQ16200
AQ16300
AQ16400
AQ16500
AQ16600
AQ16700

Flexible opal diffusing screen

5 m
10 m
25 m
50 m

AQ90300
AQ90000
AQ90100
AQ90200

Power supply Accessory

4pcs feed connectors

(for powering multiple sections with a single
power kit)

Power cable, 2x0.75 + 2x0.35, mm², white, 10 m
(to realize customized power cables)

Power cable, 2x0.75 + 2x0.35, mm², white, 50 m
(to realize customized power cables)

Power cable, 2x0.75 + 2x0.35, mm², black, 10 m
(to realize customized power cables)

Power cable, 2x0.75 + 2x0.35, mm², black, 50 m
(to realize customized power cables)

Code
AQ90500

AQ90600

AQ90700

AQ90800

AQ90900

Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories.
Bracket for fixing to ceiling is included: 1 for 1176 mm length. 2 for 2352 mm length.
End caps have to be ordered separately.


Opal diffusing screen has to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.
The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.

Power supply	Undimmable Code	Dimmable DALI Code	APP Code
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 ☺ 396x195x112h	AQ158. 01/04	AQ157. 01/04	AQ157. 01/04 APP
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 ☺ 396x195x112h	AQ15901	AQ16901	AQ16901APP
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☺ 396x195x112h	AQ17801	AQ16801	AQ16801APP
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☺ 400x110x49h	AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☺ 400x110x49h	AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☺ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18000		
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☺ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18100		
DALI to DALI-Selv Interface 103x67x21h		DV1061	
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☺ 313x243x57,5h		AQ16800	AQ16800APP
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☺ 313x243x57,5h		AQ16000	AQ16000APP

A.24

sharping

structure

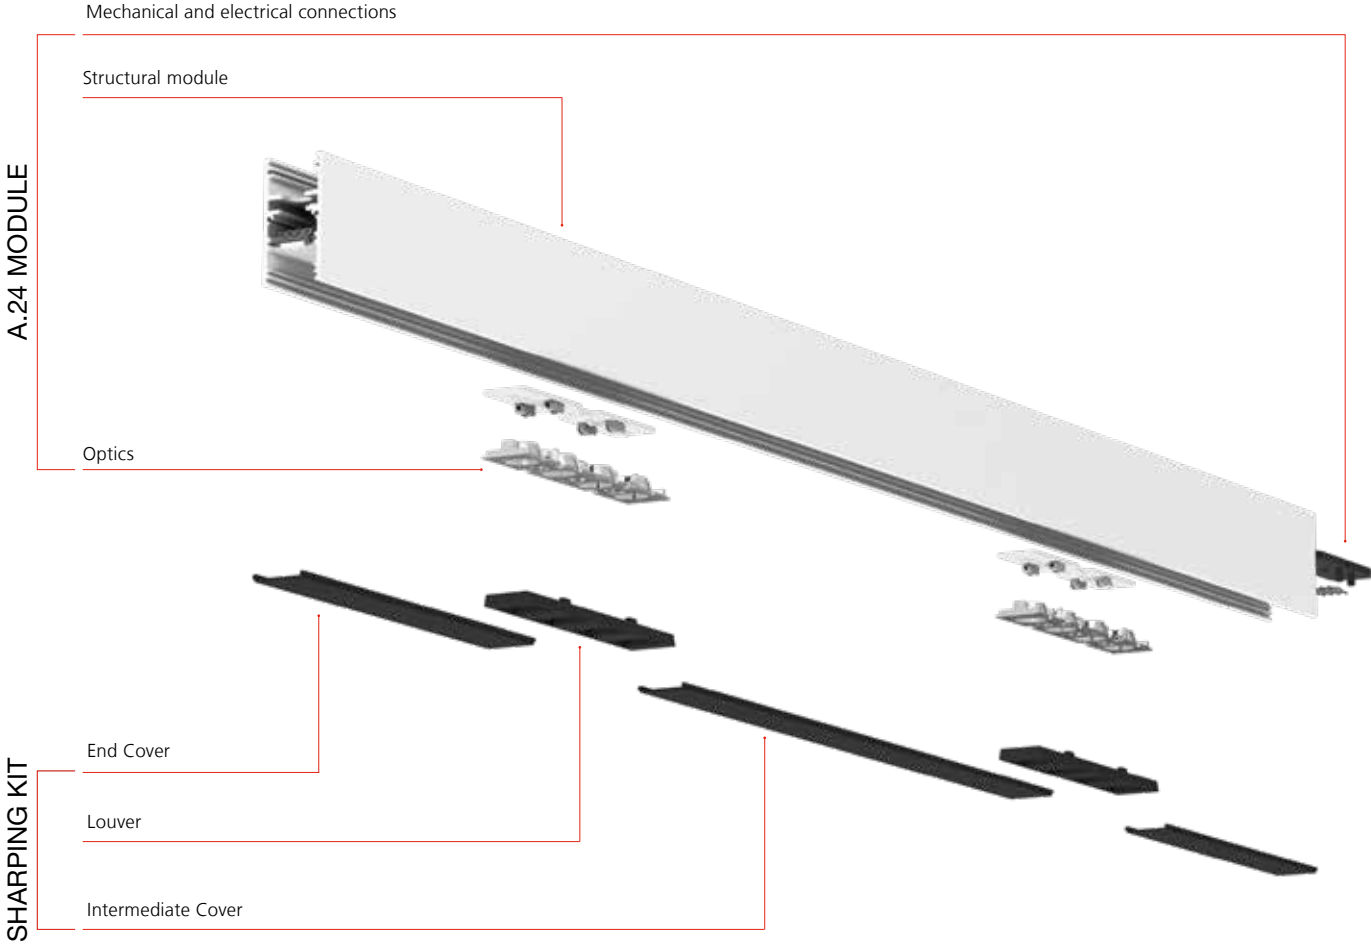



A.24 RECESSED SHARPING EMISSION

White Black



01



04

FL XF



*Uses 1 DALI address
** Uses 2 DALI addresses

MacAdam 2SDCM
Life L90 (20K) 118000h
CRI = 90


IP20

Formwork (aluminum)

Length	Radius	Alpha
Linear 1176 mm		
Linear 2352 mm		
90° angle on the same plane		
X joint		
T joint		
Curved	561 mm	60°
	750 mm	90°
		45°
		90°

End caps (2pcs)


Code
AQ29100
AQ29200
AQ29300
AQ00020
AQ00010
AQ59000
AQ59100
AQ59200
AQ59300
AQ29400



LINEAR MODULES

Length	W	Beam	Flux	CCT
1176 mm*	22W	FL 24°	1617 lm	2700K
			1628 lm	3000K
			1742 lm	4000K
		XF 62°	1718 lm	2700K
			1731 lm	3000K
			1852 lm	4000K
2352 mm**	45W	FL 24°	3233 lm	2700K
			3256 lm	3000K
			3485 lm	4000K
		XF 62°	3437 lm	2700K
			3461 lm	3000K
			3704 lm	4000K

Code
AQ214. 01/04
AQ210. 01/04
AQ211. 01/04
AQ234. 01/04
AQ230. 01/04
AQ231. 01/04
AQ215. 01/04
AQ212. 01/04
AQ213. 01/04
AQ235. 01/04
AQ232. 01/04
AQ233. 01/04





90° ANGLES

joining (not lit)

90° recessed corner (on same plane)
301x301 mm




Code
AQ240. 01/04



X&T JOINTS

	W	Beam	Flux	CCT
X Joint	11 W	FL 26°	808 lm	2700K
			808 lm	3000K
			866 lm	4000K
		XF 64°	859 lm	2700K
			859 lm	3000K
			921 lm	4000K
T Joint	11 W	FL 26°	808 lm	2700K
			808 lm	3000K
			866 lm	4000K
		XF64°	859 lm	2700K
			859 lm	3000K
			921 lm	4000K

Code
AQ008. 01/04
AQ009. 01/04
AQ010. 01/04
AQ011. 01/04
AQ012. 01/04
AQ013. 01/04
AQ132. 01/04
AQ133. 01/04
AQ134. 01/04
AQ135. 01/04
AQ136. 01/04
AQ137. 01/04

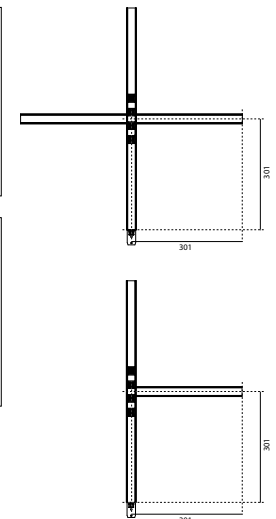


Each formwork module is provided with a mechanical joint to connect two recessed coplanar formwork modules. Each module, angle and curved modules are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately.

Sharpening kit (louvers and covers) has to be ordered separately. The APP driver can not be controlled by DALI dimming system and viceversa.

CURVED MODULES

Radius	Alpha	W	Beam	Flux	CCT	Code
561 mm*	60°	11W	FL 24°	808 lm	2700K	AQ508. 01/04
				814 lm	3000K	AQ503. 01/04
				873 lm	4000K	AQ505. 01/04
			XF 62°	859 lm	2700K	AQ509. 01/04
				865 lm	3000K	AQ504. 01/04
				928 lm	4000K	AQ506. 01/04
	90°	11W	FL 24°	808 lm	2700K	AQ518. 01/04
				814 lm	3000K	AQ513. 01/04
				873 lm	4000K	AQ515. 01/04
			XF 62°	859 lm	2700K	AQ519. 01/04
				865 lm	3000K	AQ514. 01/04
				928 lm	4000K	AQ516. 01/04
750 mm*	45°	11W	FL 24°	859 lm	2700K	AQ528. 01/04
				814 lm	3000K	AQ523. 01/04
				873 lm	4000K	AQ525. 01/04
			XF 62°	859 lm	2700K	AQ529. 01/04
				865 lm	3000K	AQ524. 01/04
				928 lm	4000K	AQ526. 01/04
	90°	22W	FL 24°	1616 lm	2700K	AQ538. 01/04
				1628 lm	3000K	AQ533. 01/04
				1742 lm	4000K	AQ535. 01/04
			XF 62°	1718 lm	2700K	AQ539. 01/04
				1731 lm	3000K	AQ534. 01/04
				1855 lm	4000K	AQ536. 01/04

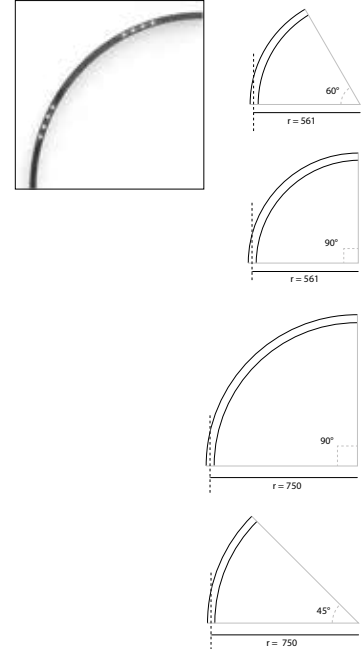

A.24 RECESSED SHARPING EMISSION

White Black



01



04

Accessories



Insulating spacer
(1 pc) between modules
powered by different power
supplies

Code

AQ206. 01/04




End caps
(2 pcs)

AQ250. 01/04



Transition joint
use between different
typology modules
(track-diffusing-sharping)

AQ290. 01/04



Louwer for linear modules
Sharping kit L=1176 mm
(2 louvers - 1 intermediate
cover - 2 end covers)

AQ260. 01/04

Sharping kit L=2352 mm
(4 louvers - 3 intermediate
cover - 2 end covers)

AQ261. 01/04

90° angle cover
(2 pcs)

AQ262. 01/04

X joint

(1 louver + 4 cover)

AQ015. 01/04

T joint

(1 louver + 3 cover)

AQ014. 01/04



Louwer for curved modules
R=561 mm / R=750 mm

AQ911. 01/04

R=561 mm 60° order 1 pc
90° order 1 pc

R=750 mm 45° order 1 pc
90° order 2 pcs

Flexible cover 2 m

AQ921. 01/04

Flexible cover 10 m

AQ920. 01/04

Power supply accessory

Code

AQ90500

4pcs feed connectors

(for powering multiple sections with a single
power kit)

Power cable, 2x0.75 + 2x0.35, mm², white, 10 m
(to realize customized power cables)

AQ90600

Power cable, 2x0.75 + 2x0.35, mm², white, 50 m
(to realize customized power cables)

AQ90700

Power cable, 2x0.75 + 2x0.35, mm², black, 10 m
(to realize customized power cables)

AQ90800

Power cable, 2x0.75 + 2x0.35, mm², black, 50 m
(to realize customized power cables)

AQ90900

Each formwork module is provided with a mechanical joint to connect two recessed coplanar formwork modules.
Each module, angle and curved modules are provided with mechanical and electrical joints and installation accessories.
End caps have to be ordered separately.

Sharping kit (louvers and covers) has to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.
The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.


Power supply	Undimmable Code	Dimmable DALI Code	APP Code
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 ☉ 396x195x112h	AQ158. 01/04	AQ157. 01/04	AQ157. 01/04 APP
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 ☉ 396x195x112h	AQ15901	AQ16901	AQ16901APP
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☉ 396x195x112h	AQ17801	AQ16801	AQ16801APP
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☉ 400x110x49h	AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☉ 400x110x49h	AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☉ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18000		
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☉ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18100		
DALI to DALI-Selv Interface 103x67x21h		DV1061	
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☉ 313x243x57,5h		AQ16800	AQ16800APP
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☉ 313x243x57,5h		AQ16000	AQ16000APP

A.24 SUSPENSION SHARPING EMISSION



White	Black	Brushed Silver	Brushed Copper	Brushed Bronze	FL	XF	*Uses 1 DALI address	MacAdam 2SDCM	IP20
							** Uses 2 DALI addresses	Life L90 (20K) 118000h	
01	04	15	18	20			*** Uses 3 DALI addresses	CRI = 90	
Fast delivery		Delivery time on demand							

LINEAR MODULES

Length	W	Beam	Flux	CCT	Code			
1176 mm*	22W	FL 24°	1617 lm	2700K	AQ424. 01/04 15/18/20			
			1628 lm	3000K	AQ420. 01/04 15/18/20			
			1742 lm	4000K	AQ421. 01/04 15/18/20			
		XF 62°	1694 lm	2700K	AQ444. 01/04 15/18/20			
			1731 lm	3000K	AQ440. 01/04 15/18/20			
			1852 lm	4000K	AQ441. 01/04 15/18/20			
			2352 mm**	45W	FL 24°	3233 lm	2700K	AQ425. 01/04 15/18/20
						3256 lm	3000K	AQ422. 01/04 15/18/20
						3485 lm	4000K	AQ423. 01/04 15/18/20
XF 62°	3437 lm	2700K	AQ445. 01/04 15/18/20					
	3461 lm	3000K	AQ442. 01/04 15/18/20					
	3704 lm	4000K	AQ443. 01/04 15/18/20					



Direct + indirect emission modules					Code
Length	W	Beam	Flux	CCT	
1176 mm**	22W direct 14W indirect	FL 24°	1617 lm direct	2700K	AQ482. 01/04 15/18/20
			1693 lm indirect		
			1628 lm direct	3000K	AQ470. 01/04 15/18/20
			1796 lm indirect		
			1742 lm direct	4000K	AQ471. 01/04 15/18/20
			1796 lm indirect		
		XF 62°	1718 lm direct	2700K	AQ486. 01/04 15/18/20
			1693 lm indirect		
			1731 lm direct	3000K	AQ478. 01/04 15/18/20
			1796 lm indirect		
			1852 lm direct	4000K	AQ479. 01/04 15/18/20
			1796 lm indirect		
2352 mm***	45W indirect 29W indirect	FL 24°	3056 lm direct	2700K	AQ483. 01/04 15/18/20
			3233 lm indirect		
			3233 lm direct	3000K	AQ472. 01/04 15/18/20
			3586 lm indirect		
			3485 lm direct	4000K	AQ473. 01/04 15/18/20
			3591 lm indirect		
		XF 62°	3437 lm direct	2700K	AQ487. 01/04 15/18/20
			3386 lm indirect		
			3461 lm direct	3000K	AQ480. 01/04 15/18/20
			3591 lm indirect		
			3704 lm direct	4000K	AQ481. 01/04 15/18/20
			3591 lm indirect		





90° ANGLES

joining (not lit)

90° suspension corner (on same plane)
301x301 mm





Code
AQ450. 01/04 15/18/20



Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories.
 1 suspension cable is also included.
 End caps have to be ordered separately.
 Sharping kit (louvers and covers) has to be ordered separately.

X&T JOINTS

X & T Joints					Code
	W	Beam	Flux	CCT	
X Joint	11 W	FL 26°	808 lm	2700K	AQ002. 01/04 15/18/20
			808 lm	3000K	AQ003. 01/04 15/18/20
			866 lm	4000K	AQ004. 01/04 15/18/20
		XF 64°	859 lm	2700K	AQ005. 01/04 15/18/20
			859 lm	3000K	AQ006. 01/04 15/18/20
			921 lm	4000K	AQ007. 01/04 15/18/20
			T Joint	11 W	FL 26°
808 lm	3000K	AQ127. 01/04 15/18/20			
866 lm	4000K	AQ128. 01/04 15/18/20			
XF64°	859 lm	2700K			AQ129. 01/04 15/18/20
	859 lm	3000K			AQ130. 01/04 15/18/20
	921 lm	4000K			AQ131. 01/04 15/18/20








A.24 SUSPENSION SHARPING EMISSION

White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	FL	XF	*Uses 1 DALI address ** Uses 2 DALI addresses *** Uses 3 DALI addresses	MacAdam 2SDCM Life L90 (20K) 118000h CRI = 90	IP20
------------------------------	-------------	---	----------------------	----------------------	----	----	---	---	------

CURVED MODULES

Curved direct emission modules

Radius	Alpha	W	Beam	Flux	CCT	Code
561 mm*	60°	11W	FL 24°	808 lm	2700K	AQ708. 01/04 15/18/20
				814 lm	3000K	AQ703. 01/04 15/18/20
				873 lm	4000K	AQ705. 01/04 15/18/20
			XF 62°	859 lm	2700K	AQ709. 01/04 15/18/20
				865 lm	3000K	AQ704. 01/04 15/18/20
				928 lm	4000K	AQ706. 01/04 15/18/20
	90°	11W	FL 24°	808 lm	2700K	AQ718. 01/04 15/18/20
				814 lm	3000K	AQ713. 01/04 15/18/20
				873 lm	4000K	AQ715. 01/04 15/18/20
			XF 62°	859 lm	2700K	AQ719. 01/04 15/18/20
				865 lm	3000K	AQ714. 01/04 15/18/20
				928 lm	4000K	AQ716. 01/04 15/18/20
750 mm*	45°	11W	FL 24°	808 lm	2700K	AQ728. 01/04 15/18/20
				814 lm	3000K	AQ723. 01/04 15/18/20
				873 lm	4000K	AQ725. 01/04 15/18/20
			XF 62°	859 lm	2700K	AQ729. 01/04 15/18/20
				865 lm	3000K	AQ724. 01/04 15/18/20
				928 lm	4000K	AQ726. 01/04 15/18/20
	90°	22W	FL 24°	1617 lm	2700K	AQ738. 01/04 15/18/20
				1628 lm	3000K	AQ733. 01/04 15/18/20
				1745 lm	4000K	AQ735. 01/04 15/18/20
			XF 62°	1718 lm	2700K	AQ739. 01/04 15/18/20
				1731 lm	3000K	AQ734. 01/04 15/18/20
				1855 lm	4000K	AQ736. 01/04 15/18/20

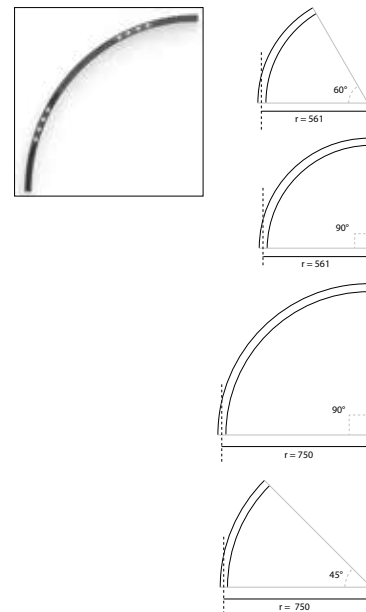

Power supply Accessory

4pcs feed connectors

(for powering multiple sections with a single power kit)

Power cable, 2x0.75 + 2x0.35, mm², white, 10 m

(to realize customized power cables)

Power cable, 2x0.75 + 2x0.35, mm², white, 50 m

(to realize customized power cables)

Power cable, 2x0.75 + 2x0.35, mm², black, 10 m

(to realize customized power cables)

Power cable, 2x0.75 + 2x0.35, mm², black, 50 m

(to realize customized power cables)

Code

AQ90500

AQ90600







AQ90700

AQ90800

AQ90900

Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories.
 1 suspension cable is also included.
 End caps have to be ordered separately.
 Sharping kit (louvers and covers) has to be ordered separately.

The APP driver can not be controlled by DALI dimming system and viceversa.
 The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.


Accessories		Code		Code
	Insulating spacer (1 pcs) between modules powered by different power supplies	AQ453. 01/04 15/18/20		Louvers for linear modules Sharping kit L=1176 mm (2 louvers - 1 intermediate cover - 2 end covers) Sharping kit L=2352 mm (4 louvers - 3 intermediate cover - 2 end covers) X joint (1 louver + 4 cover) T joint (1 louver + 3 cover) 90° angle cover (2 pcs)
	End caps (2 pcs) including 2 suspension cables 200H	AQ451. 01/04 15/18/20		AQ260. 01/04 AQ261. 01/04 AQ015. 01/04 AQ014. 01/04 AQ262. 01/04
	Transition cap track - diffusing track - sharpening diffusing - sharpening	AQ494. 01/04 15/18/20		
	Auxiliary suspension cable (1 pcs) to be used for S-configuration	AQ49500		Louvers for curved modules R=561 mm / R=750 mm R=561 mm 60° order 1 pc 90° order 1 pc R=750 mm 45° order 1 pc 90° order 2 pcs Flexible cover 2 m Flexible cover 10 m
				AQ911. 01/04 AQ921. 01/04 AQ920. 01/04
Power supply	Undimmable	Dimmable DALI	APP	
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 Ⓢ 396x195x112h	Code AQ158. 01/04	Code AQ157. 01/04	Code AQ157. 01/04 APP	
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 Ⓢ 396x195x112h	AQ15901	AQ16901	AQ16901APP	
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 396x195x112h	AQ17801	AQ16801	AQ16801APP	
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 400x110x49h	AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP	
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 400x110x49h	AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP	
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 Ⓢ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18000			
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 Ⓢ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18100			
DALI to DALI-Selv Interface 103x67x21h		DV1061		
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 Ⓢ 313x243x57,5h		AQ16800	AQ16800APP	
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 Ⓢ 313x243x57,5h		AQ16000	AQ16000APP	

A.24 CEILING SHARPING EMISSION

White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	FL	XF	*Uses 1 DALI address ** Uses 2 DALI addresses	MacAdam 2SDCM Life L90 (20K) 118000h CRI = 90	IP20
------------------------------	-------------	---	----------------------	----------------------	----	----	--	---	------

LINEAR MODULES

Length	W	CRI	Beam	Flux	CCT	Code
1176 mm*	22W	90	FL 24°	1617 lm	2700K	AQ324. 01/04 15/18/20
				1628 lm	3000K	AQ320. 01/04 15/18/20
				1742 lm	4000K	AQ321. 01/04 15/18/20
			XF 62°	1718 lm	2700K	AQ344. 01/04 15/18/20
				1731 lm	3000K	AQ340. 01/04 15/18/20
				1852 lm	4000K	AQ341. 01/04 15/18/20
				3233 lm	2700K	AQ325. 01/04 15/18/20
				3256 lm	3000K	AQ322. 01/04 15/18/20
				3485 lm	4000K	AQ323. 01/04 15/18/20
2352 mm**	45W	90	FL 24°	3233 lm	2700K	AQ325. 01/04 15/18/20
				3256 lm	3000K	AQ322. 01/04 15/18/20
				3485 lm	4000K	AQ323. 01/04 15/18/20
			XF 62°	3437 lm	2700K	AQ345. 01/04 15/18/20
				3461 lm	3000K	AQ342. 01/04 15/18/20
				3704 lm	4000K	AQ343. 01/04 15/18/20




90° ANGLES

Joining (not lit)




90° ceiling corner (on same plane)
301x301mm

Code
AQ360. 01/04
15/18/20



X&T JOINTS

	W	Beam	Flux	CCT	Code
X Joint	11 W	FL 26°	808 lm	2700K	AQ008. 01/04 15/18/20
			808 lm	3000K	AQ009. 01/04 15/18/20
			866 lm	4000K	AQ010. 01/04 15/18/20
		XF 64°	859 lm	2700K	AQ011. 01/04 15/18/20
			859 lm	3000K	AQ012. 01/04 15/18/20
			921 lm	4000K	AQ013. 01/04 15/18/20
			808 lm	2700K	AQ132. 01/04 15/18/20
			808 lm	3000K	AQ133. 01/04 15/18/20
			866 lm	4000K	AQ134. 01/04 15/18/20
T Joint	11 W	FL 26°	808 lm	2700K	AQ132. 01/04 15/18/20
			808 lm	3000K	AQ133. 01/04 15/18/20
			866 lm	4000K	AQ134. 01/04 15/18/20
		XF64°	859 lm	2700K	AQ135. 01/04 15/18/20
			859 lm	3000K	AQ136. 01/04 15/18/20
			921 lm	4000K	AQ137. 01/04 15/18/20




A.24 CEILING SHARPING EMISSION

Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories.
Bracket for fixing to ceiling is included: 1 for 1176 mm length - 2 for 2352 mm length.
End caps have to be ordered separately.






Sharping kit (louvers and covers) has to be ordered separately.

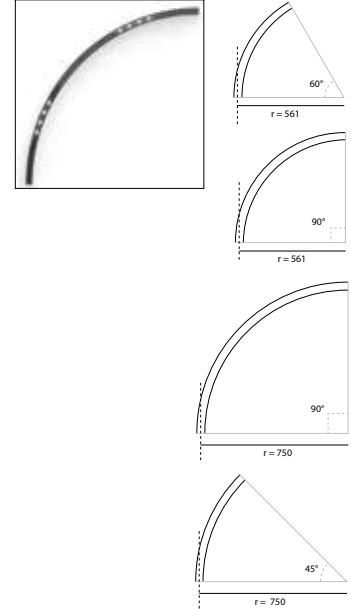





CURVED MODULES

Radius	Alpha	W	CRI	Beam	Flux	CCT	Code
561 mm*	60°	11W	90	FL 24°	808 lm	2700K	AQ608. 01/04 15/18/20
					814 lm	3000K	AQ603. 01/04 15/18/20
					873 lm	4000K	AQ605. 01/04 15/18/20
				XF 62°	859 lm	2700K	AQ609. 01/04 15/18/20
					865 lm	3000K	AQ604. 01/04 15/18/20
					928 lm	4000K	AQ606. 01/04 15/18/20
	90°	11W	90	FL 24°	808 lm	2700K	AQ618. 01/04 15/18/20
					814 lm	3000K	AQ613. 01/04 15/18/20
					873 lm	4000K	AQ615. 01/04 15/18/20
				XF 62°	859 lm	2700K	AQ619. 01/04 15/18/20
					865 lm	3000K	AQ614. 01/04 15/18/20
					928 lm	4000K	AQ616. 01/04 15/18/20
750 mm*	45°	11W	90	FL 24°	808 lm	2700K	AQ628. 01/04 15/18/20
					814 lm	3000K	AQ623. 01/04 15/18/20
					873 lm	4000K	AQ625. 01/04 15/18/20
				XF 62°	859 lm	2700K	AQ629. 01/04 15/18/20
					865 lm	3000K	AQ624. 01/04 15/18/20
					928 lm	4000K	AQ626. 01/04 15/18/20
	90°	22W	90	FL 24°	1617 lm	2700K	AQ638. 01/04 15/18/20
					1628 lm	3000K	AQ633. 01/04 15/18/20
					1745 lm	4000K	AQ635. 01/04 15/18/20
				XF 62°	1718 lm	2700K	AQ639. 01/04 15/18/20
					1731 lm	3000K	AQ634. 01/04 15/18/20
					1855 lm	4000K	AQ636. 01/04 15/18/20



A.24 CEILING SHARPING EMISSION

White	Black	Brushed Silver	Brushed Copper	Brushed Bronze
				
01	04	15	18	20
Fast delivery		Delivery time on demand		

Accessories		Code			Code
	Insulating spacer (1 pcs) between modules powered by different power supply	AQ352. 01/04 15/18/20		Louvers for linear modules Sharping kit L=1176 mm (2 louvers - 1 intermediate cover - 2 end covers) Sharping kit L=2352 mm (4 louvers - 3 intermediate cover - 2 end covers) X joint (1 louver + 4 cover) T joint (1 louver + 3 cover) 90° angle cover (2 pcs)	AQ260. 01/04 AQ261. 01/04 AQ015. 01/04 AQ014. 01/04 AQ262. 01/04
	End caps (2 pcs)	AQ350. 01/04 15/18/20			
	Cap for cable passage (1 pcs)	AQ353. 01/04 15/18/20			
	Transition cap track - diffusing track- sharpening diffusing - sharpening	AQ394. 01/04 15/18/20		Louvers for curved modules R=561 mm / R=750 mm R=561 mm 60° order 1 pc 90° order 1 pc R=750 mm 45° order 1 pc 90° order 2 pcs	AQ911. 01/04
				Flexible cover 2 m Flexible cover 10 m	AQ921. 01/04 AQ920. 01/04

Power supply accessory	Code
4pcs feed connectors (for powering multiple sections with a single power kit)	AQ90500
Power cable, 2x0.75 + 2x0.35, mm², white, 10 m (to realize customized power cables)	AQ90600
Power cable, 2x0.75 + 2x0.35, mm², white, 50 m (to realize customized power cables)	AQ90700
Power cable, 2x0.75 + 2x0.35, mm², black, 10 m (to realize customized power cables)	AQ90800
Power cable, 2x0.75 + 2x0.35, mm², black, 50 m (to realize customized power cables)	AQ90900

Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories. Bracket for fixing to ceiling is included: 1 for 1176 mm length - 2 for 2352 mm length. End caps have to be ordered separately.

Sharping kit (louvers and covers) has to be ordered separately. The APP driver can not be controlled by DALI dimming system and viceversa. The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.

Power supply	Undimmable Code	Dimmable DALI Code	APP Code
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 Ⓢ 396x195x112h	AQ158. 01/04	AQ157. 01/04	AQ157. 01/04 APP
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 Ⓢ 396x195x112h	AQ15901	AQ16901	AQ16901APP
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 396x195x112h	AQ17801	AQ16801	AQ16801APP
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 400x110x49h	AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 400x110x49h	AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 Ⓢ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18000		
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 Ⓢ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18100		
DALI to DALI-Selv Interface 103x67x21h		DV1061	
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 Ⓢ 313x243x57,5h		AQ16800	AQ16800APP
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 Ⓢ 313x243x57,5h		AQ16000	AQ16000APP





A.24 configurator


Artemide provides tools to support the end customer and especially the lighting professionals in choosing the best lighting solution.

For an intuitive composition of the most complex systems, Artemide offers innovative and complete configurators on its website.


A.24 system Configurator is a useful tool to simplify the design of your composition.

After defining the layout of the space, the desired system can be created by a simple drag and drop of the various available modules. Once the project is completed, the system returns drawings and a complete datasheet with all the details to proceed with the order.


1. Build your space

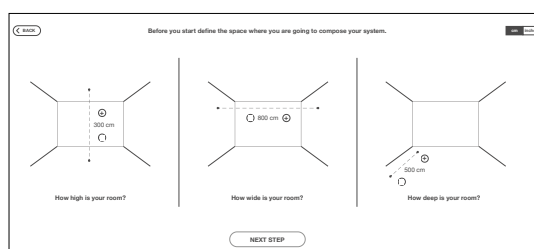

2. Drag and drop

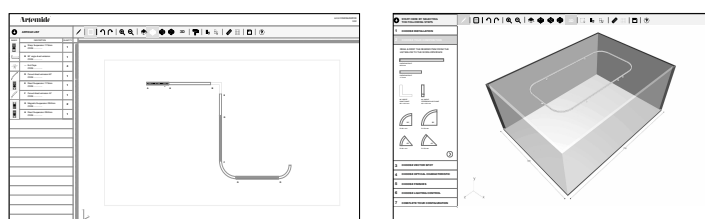

3. Save it and send it!

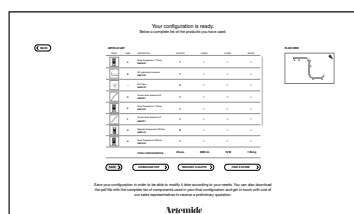







A.24 circular stand-alone













A.24 CIRCULAR STAND-ALONE - DIFFUSED EMISSION

<p>White Black</p>  <p>01 04</p> <p>Fast delivery</p>	<p>Brushed Silver Brushed Copper Brushed Bronze</p>  <p>15 18 20</p> <p>Delivery time on demand</p>	<p>220/240Vac 50/60Hz electronic ballast included.</p>	<p>MacAdam 2SDCM Lifetime L70 (9K) 50000 *MacAdam 3SDCM Lifetime L70 (17K) 102000 3000K - 4000K CRI = 90 2700K CRI = 80</p>	<p>IP20</p>  <p>Uses 1 DALI addresses.</p>
--	---	--	---	--

RECESSED


Ø	W	Flux ¹	CCT	Code	APP Code
1122 mm	95W	8082 lm	2700K	AQ54401	AQ54401APP
	88W	9044 lm	3000K*	AQ54001	AQ54001APP
	88W	9044 lm	4000K	AQ54101	AQ54101APP
1500 mm	132W	10776 lm	2700K	AQ55401	AQ55401APP
	118W	12058 lm	3000K*	AQ55001	AQ55001APP
	118W	12058 lm	4000K	AQ55101	AQ55101APP

Formwork (aluminum) included



SUSPENSION

Ø	W	Flux ¹	CCT	Code	APP Code
1122 mm	95W	8082 lm	2700K	AQ744. 01/04 15/18/20	AQ744. 01/04 APP 15/18/20 APP
	88W	9044 lm	3000K*	AQ740. 01/04 15/18/20	AQ740. 01/04 APP 15/18/20 APP
	88W	9044 lm	4000K	AQ741. 01/04 15/18/20	AQ741. 01/04 APP 15/18/20 APP
1500 mm	132W	10776 lm	2700K	AQ754. 01/04 15/18/20	AQ754. 01/04 APP 15/18/20 APP
	118W	12058 lm	3000K*	AQ750. 01/04 15/18/20	AQ750. 01/04 APP 15/18/20 APP
	118W	12058 lm	4000K	AQ751. 01/04 15/18/20	AQ751. 01/04 APP 15/18/20 APP



Cable length for suspension version

For Dali L 2100 mm
For APP L 1750 mm

Power supply kit color specifications

DALI version: White body + white ceiling rose + white cable. Silver/copper/bronze/black body + black ceiling rose + black cable.
APP version: White body + white ceiling rose + transparent cable. Silver/copper/bronze/black body + black ceiling rose + transparent cable.

CEILING

Ø	W	Flux ¹	CCT	Dimmable DALI Code	APP Code
1122 mm	95W	8082 lm	2700K	AQ644. 01/04 15/18/20	AQ644. 01/04 APP 15/18/20 APP
	88W	9044 lm	3000K*	AQ640. 01/04 15/18/20	AQ640. 01/04 APP 15/18/20 APP
	88W	9044 lm	4000K	AQ641. 01/04 15/18/20	AQ641. 01/04 APP 15/18/20 APP
1550 mm	132W	10776 lm	2700K	AQ654. 01/04 15/18/20	AQ654. 01/04 APP 15/18/20 APP
	118W	12058 lm	3000K*	AQ650. 01/04 15/18/20	AQ650. 01/04 APP 15/18/20 APP
	118W	12058 lm	4000K	AQ651. 01/04 15/18/20	AQ651. 01/04 APP 15/18/20 APP

Accessories

Trimless frame to be used for recessing the power kit

For suspension Stand-alone Ø 1122 and Ø 1500

For ceiling Stand-alone Ø 1122 and Ø 1500

Code
AQ94000

AQ94200

¹ Direct luminous flux: measured using white body.
With black body -17% output flux.

A.24 CIRCULAR STAND-ALONE - DIFFUSED EMISSION FLEXIBLE OPAL DIFFUSER SCREEN

	Emission	White body + flexible diffuser cod. AQ90...	Black body + flexible diffuser cod. AQ90...
Ø 1122 mm			
2700K	Direct	8082 lm	6375 lm
3000K	Direct	9044 lm	7101 lm
4000K	Direct	9044 lm	7101 lm
Ø 1500 mm			
2700K	Direct	10776 lm	8499 lm
3000K	Direct	12058 lm	9468 lm
4000K	Direct	12058 lm	9468 lm

Flux for Silver body is the same of White body.





Flux for Copper and Bronze body is the same of Black body.








A.24 CIRCULAR STAND-ALONE - SHARPING EMISSION

<p>White Black</p>  <p>01 04</p> <p>Fast delivery</p>	<p>Brushed Silver Brushed Copper Brushed Bronze</p>  <p>15 18 20</p> <p>Delivery time on demand</p>	<p>FL </p> <p>220/240Vac 50/60Hz electronic ballast included.</p> <p>Sharping kit has to be ordered separately.</p> <p>*Uses 1 DALI address</p> <p>** Uses 2 DALI addresses</p>	<p>MacAdam 2SDCM</p> <p>Lifetime L90 (20K) 118000 </p> <p>3000K - 4000K CRI = 90</p> <p>2700K CRI = 80</p>
--	---	--	---

RECESSED


Direct emission					Dimmable DALI		APP	
Ø	W	Beam	Flux	CCT	Code	Code	Code	
1122 mm*	42W	FL 24°	3056 lm	2700K	AQ545. 01/04	AQ545. 01/04 APP		
			3256 lm	3000K	AQ542. 01/04	AQ542. 01/04 APP		
			3485 lm	4000K	AQ543. 01/04	AQ543. 01/04 APP		
1500 mm**	83W	FL 24°	6112 lm	2700K	AQ555. 01/04	AQ555. 01/04 APP		
			6512 lm	3000K	AQ552. 01/04	AQ552. 01/04 APP		
			6969 lm	4000K	AQ553. 01/04	AQ553. 01/04 APP		



Formwork (aluminum) included

SUSPENSION

Direct emission					Dimmable DALI		APP	
Ø	W	Beam	Flux	CCT	Code	Code	Code	
1122 mm*	42W	FL 24°	3056 lm	2700K	AQ745. 01/04	AQ745. 01/04 APP		
			3256 lm	3000K	15/18/20	AQ742. 01/04 APP		
			3485 lm	4000K	15/18/20	AQ743. 01/04 APP		
1500 mm**	83W	FL 24°	6112 lm	2700K	15/18/20	AQ755. 01/04 APP		
			6512 lm	3000K	15/18/20	AQ752. 01/04 APP		
			6969 lm	4000K	15/18/20	AQ753. 01/04 APP		



Cable length for suspension version


for Dali L 2100 mm
for APP L 1750 mm

Power supply kit color specifications


DALI version: White body + white ceiling rose + white cable. Silver/copper/bronze/black body + black ceiling rose + black cable.
APP version: White body + white ceiling rose + transparent cable. Silver/copper/bronze/black body + black ceiling rose + transparent cable.

CEILING

Direct emission					Dimmable DALI		APP	
Ø	W	Beam	Flux	CCT	Code	Code	Code	
1122 mm*	42W	FL 24°	3056 lm	2700K	AQ645. 01/04	AQ645. 01/04 APP		
			3256 lm	3000K	15/18/20	AQ642. 01/04 APP		
			3485 lm	4000K	15/18/20	AQ643. 01/04 APP		
1500 mm**	83W	FL 24°	6112 lm	2700K	15/18/20	AQ655. 01/04 APP		
			6512 lm	3000K	15/18/20	AQ652. 01/04 APP		
			6969 lm	4000K	15/18/20	AQ653. 01/04 APP		



Sharping accessories



Sharping kit R=561 mm
(4 louvers - 4 covers)
Sharping kit R=750 mm
(8 louvers - 8 covers)

Code
AQ930. 01/04

AQ931. 01/04

Accessories

Trimless frame to be used for recessing the power kit
For suspension Stand-alone Ø 1122 and Ø 1500
For ceiling Stand-alone Ø 1122 and Ø 1500

Code
AQ94000

AQ94200













A.24
wall


A.24 WALL - DIFFUSED EMISSION

White	Black	Brushed Silver	Brushed Copper	Brushed Bronze	220/240Vac 50/60Hz electronic ballast included	MacAdam 3SDCM Life L70 (17K) 102000h	IP20
							
01	04	15	18	20			
Fast delivery		Delivery time on demand					

Direct and indirect emission

Length	W	CRI	Flux	CCT
300 mm	23 W	90	1919 lm	2700K
			2036 lm	3000K



Code
BK010. 01/04 15/18/20
BK020. 01/04 15/18/20



Direct and indirect emission

Length	W	CRI	Flux	CCT
600 mm	30 W	90	2601 lm	2700K
			2759 lm	3000K


Code
BK110. 01/04 15/18/20
BK120. 01/04 15/18/20



Direct and indirect emission

Length	W	CRI	Flux	CCT
900 mm	45 W	90	3901 lm	2700K
			4139lm	3000K

Code
BK210. 01/04 15/18/20
BK220. 01/04 15/18/20

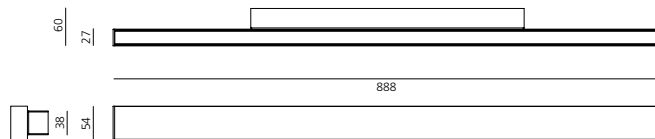





A.24 is compatible with **Artemide App**

Artemide App is a user-friendly and intuitive interface used to control individual products, groups of appliances and lighting scenarios. It is a tool that can be associated with several products from both the Design and the Architectural Catalogues.



Download Artemide App
and find more information on
artemide.com

Headquarters

Artemide S.p.A.

Via Bergamo, 18
20006 Pregnana Milanese (MI), Italy
Tel. +39 02 93518.1
Tel. +39 02 93526.1
Numero verde 800 834 093
(from Italy only)
info@artemide.com
artemide.com

Artemide S.p.A.

si riserva la facoltà di modificare, in qualunque momento e senza preavviso, le caratteristiche tecniche degli elementi illustrati nel presente catalogo.

Artemide S.p.A.

reserves the right to change, at any time and without prior warning, the technical specifications of any product illustrated in this catalogue.

Artemide S.p.A.

se réserve le droit de modifier, à n'importe quel moment et sans préavis, les caractéristiques techniques des éléments illustrés dans ce catalogue.

Artemide S.p.A.

behält sich das Recht vor jederzeit und ohne Ankündigung die technischen Daten der im Katalog abgebildeten Produkte zu ändern.

Artemide S.p.A.

se reserva la facultad de modificar, en cualquier y sin aviso previo, las características técnicas de los elementos ilustrados en el presente catálogo.

2025

For information regarding distributors
and points of sale, please visit our website
artemide.com or email: info@artemide.com