

## Luminaire

Code M140911  
Name Airlite plafone LED 4000K WIDE FLOOD nero dimmerabile

## Measurement

Code FTS1501660  
Name Airlite plafone LED 4000K WIDE FLOOD nero dimmerabile

Luminaire Flux	3272.00 lm	Luminaire Power	35.00 W	Efficacy	93.49 lm/W	Efficiency	100.00%
Lamps Flux	3272.00 lm	Maximum value	2339.22 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	140 mm	Height	90 mm		
Round Luminous Area		Diam.	106 mm	Height	0 mm		
Horizontal Luminous Area		0.008825 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002135 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		15-01-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		3272.00 lm	
LED Flux=4583lm LED Power=30W Eff=71% EfcLed=153lm/W EfcLum=93lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	85 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=140mm



Semipiani C

180.0 — 0.0

ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %

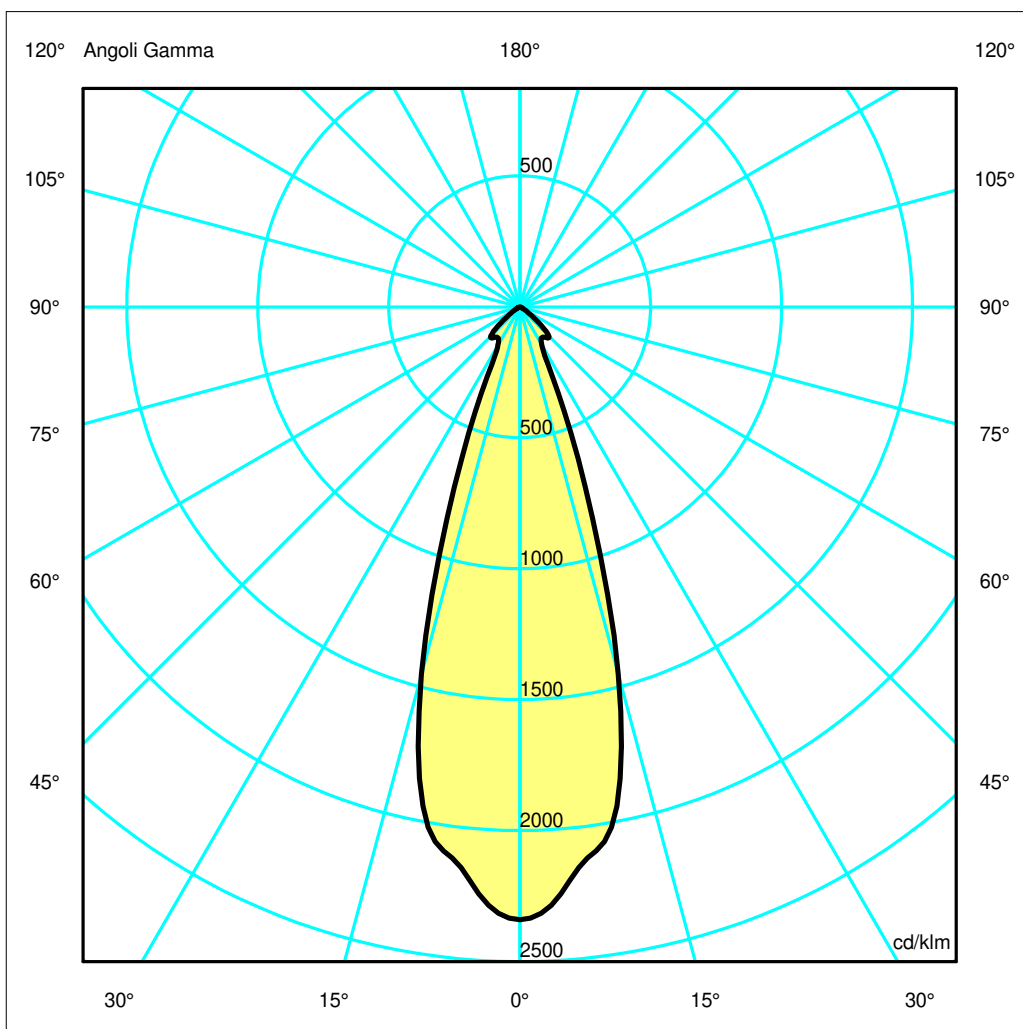

## Luminaire


Code M140911  
Name Airlite plafone LED 4000K WIDE FLOOD nero dimmerabile  
**Measur.**  
Code FTS1501660  
Name Airlite plafone LED 4000K WIDE FLOOD nero dimmerabile

Luminaire Flux	3272.00 lm	Luminaire Power	35.00 W	Efficacy	93.49 lm/W	Efficiency	100.00%
Lamps Flux	3272.00 lm	Maximum value	2339.22 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	140 mm	Height	90 mm		
Round Luminous Area		Diam.	106 mm	Height	0 mm		
Horizontal Luminous Area		0.008825 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002135 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		15-01-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		3272.00 lm	
LED Flux=4583lm LED Power=30W Eff=71% EfcLed=153lm/W EfcLum=93lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	85 99 100 100 100			D DIN 5040		A60	
F UTE	1.00 A			B NBN		BZ 1	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.30	0.61	0.91	1.21	1.52	OC	0.30	0.61	0.91	1.21	1.52
OB	0.30	0.61	0.91	1.21	1.52	OD	0.30	0.61	0.91	1.21	1.52

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	7653.92	7190.46	4749.68	969.55	474.71	510.09	134.39	33.09	6.26	0.00
OB	7653.92	7190.46	4749.68	969.55	474.71	510.09	134.39	33.09	6.26	0.00
OC	7653.92	7190.46	4749.68	969.55	474.71	510.09	134.39	33.09	6.26	0.00
OD	7653.92	7190.46	4749.68	969.55	474.71	510.09	134.39	33.09	6.26	0.00

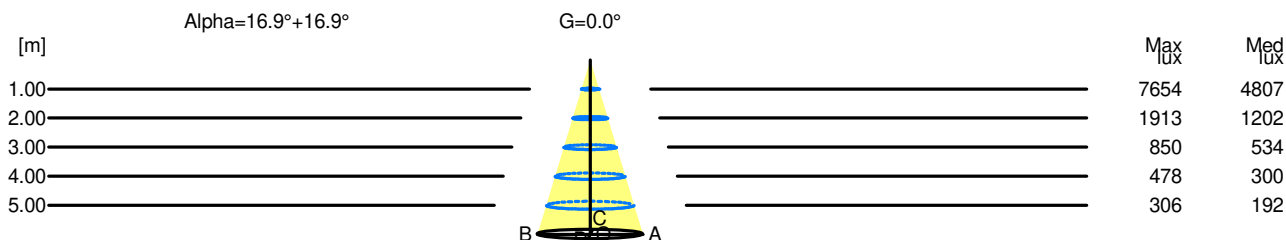

H[m]	D[m]	Max lux	Med lux	Alpha=16.9°+16.9°	G=0.0
1.00	0.61	7654	4807		
2.00	1.21	1913	1202		
3.00	1.82	850	534		
4.00	2.43	478	300		
5.00	3.03	306	192		