

Luminaire

Code M240331
Name TAGORA 570 SOSPENSIONE LED DOPPIA EMISSIONE DIMMERABILE DALI 4000K NERO/BLU

Measurem.

Code FTS2200132-A
Name TAGORA 570 SOSPENSIONE LED DOPPIA EMISSIONE DIMMERABILE DALI 4000K NERO/BLU

Luminaire Flux	4493 lm	Luminaire Power	72.0 W	Efficacy	62.403 lm/W	Efficiency	100.00%
Source Flux	4493 lm	Maximum value	318.19 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	570 mm	Height	195 mm		
Round Luminous Area		Diam.	475 mm	Height	0 mm		
Horizontal Luminous Area		0.177205 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.042870 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-05-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4493 lm	
LED Flux=10845lm LED Power=63W Eff=41% EfcLed=172lm/W EfcLum=62lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(11k)=69000h							
C.I.E.	55 88 99 76 100			D DIN 5040	B41		
F UTE	0.76 D + 0.24 T			B NBN	BZ 3		

Diam=570mm




Semipiani C

180.0 ——— 0.0

ULOR 24.26 %

DLOR 75.74 %

RN 24.26 %

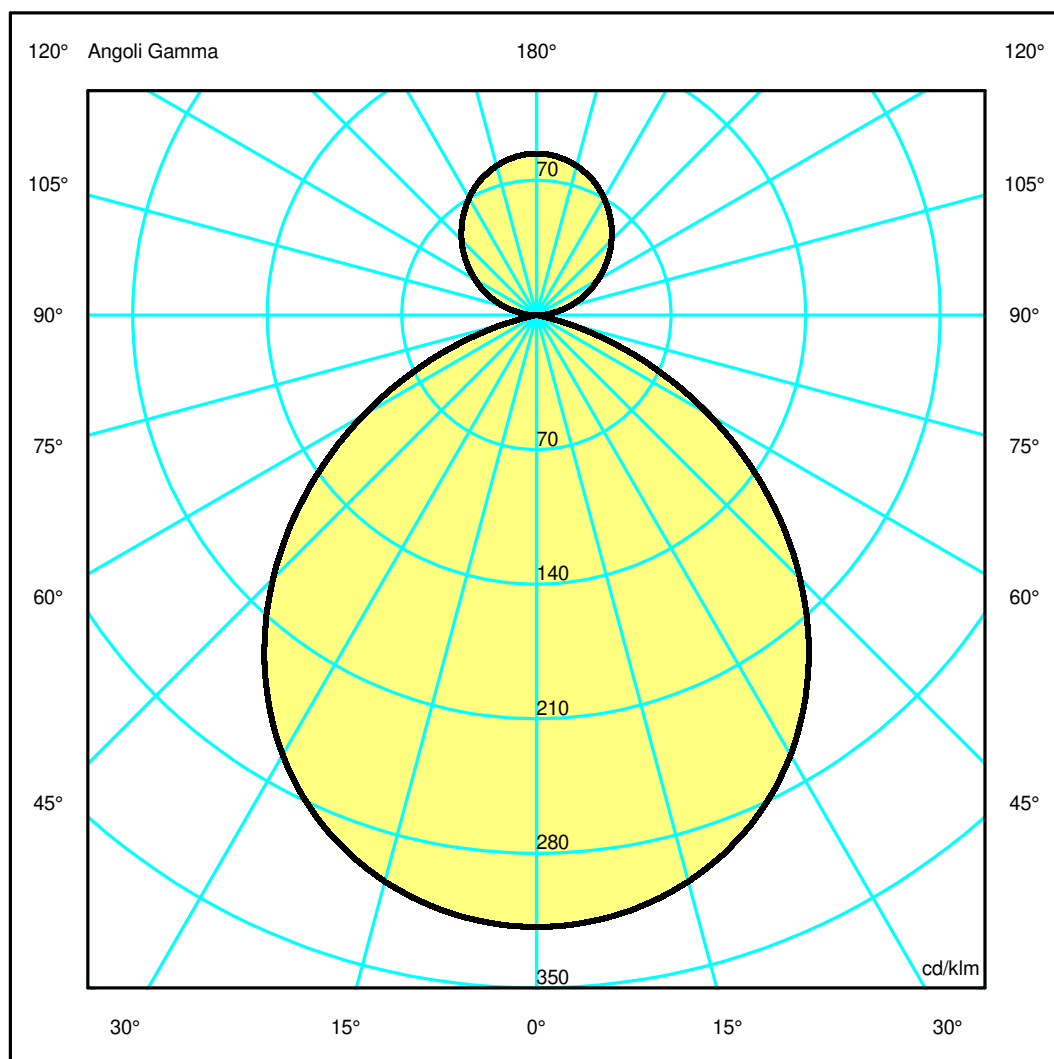

Luminaire

Code M240331
Name TAGORA 570 SOSPENSIONE LED DOPPIA EMISSIONE DIMMERABILE DALI 4000K NERO/BLU

Measurem.


Code FTS2200132-A
Name TAGORA 570 SOSPENSIONE LED DOPPIA EMISSIONE DIMMERABILE DALI 4000K NERO/BLU

Luminaire Flux	4493 lm	Luminaire Power	72.0 W	Efficacy	62.403 lm/W	Efficiency	100.00%
Source Flux	4493 lm	Maximum value	318.19 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Round Luminaire		Diam.	570 mm	Height	195 mm		
Round Luminous Area		Diam.	475 mm	Height	0 mm		
Horizontal Luminous Area		0.177205 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.042870 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-05-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4493 lm	
LED Flux=10845lm LED Power=63W Eff=41% EfcLed=172lm/W EfcLum=62lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(11k)=69000h							
C.I.E.	55 88 99 76 100			D DIN 5040	B41		
F UTE	0.76 D + 0.24 T			B NBN	BZ 3		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.24	2.47	3.71	4.94	6.18	OC	1.24	2.47	3.71	4.94	6.18
OB	1.24	2.47	3.71	4.94	6.18	OD	1.24	2.47	3.71	4.94	6.18

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1429.62	1422.88	1370.35	1262.81	1094.84	870.95	606.21	324.68	67.72	3.15
OB	1429.62	1422.88	1370.35	1262.81	1094.84	870.95	606.21	324.68	67.72	3.15
OC	1429.62	1422.88	1370.35	1262.81	1094.84	870.95	606.21	324.68	67.72	3.15
OD	1429.62	1422.88	1370.35	1262.81	1094.84	870.95	606.21	324.68	67.72	3.15

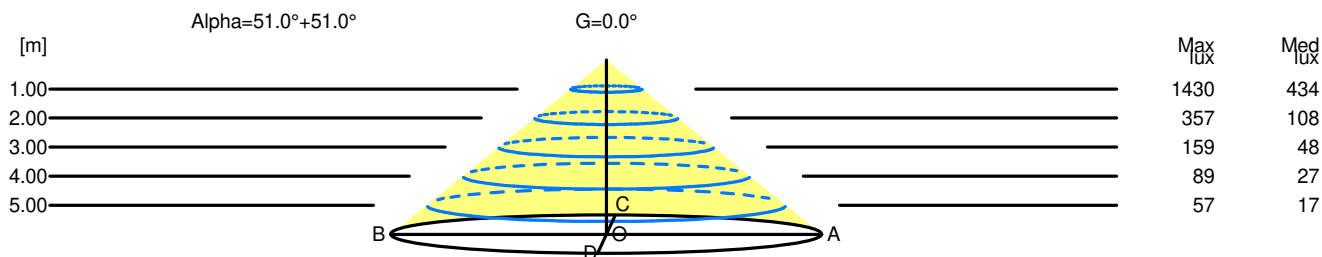

H[m]	D[m]	Max lux	Med lux	Alpha=51.0°+51.0°	G=0.0
1.00	2.47	1430	434		
2.00	4.94	357	108		
3.00	7.42	159	48		
4.00	9.89	89	27		
5.00	12.36	57	17		