

## Luminaire

Code M0671W81+M109800+M282007

Name CATA TIR SOSPENSIONE STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA WIDE FLOOD + LENTE ELLITTICA

## Measur.


Code FTS1503370

Name CATA TIR SOSPENSIONE STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA WIDE FLOOD + LENTE ELLITTICA

Luminaire Flux	1174.66 lm	Luminaire Power	22.00 W	Efficacy	53.39 lm/W	Efficiency	100.00%
Lamps Flux	1174.66 lm	Maximum value	1078.06 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	130 mm	Height	176 mm		
Round Luminous Area		Diam.	75 mm	Height	50 mm		
Horizontal Luminous Area		0.004418 m2		Emitting area on Plane 180°		0.003750 m2	
Emitting area on Plane 0°		0.003750 m2		Emitting area on Plane 270°		0.003750 m2	
Emitting area on Plane 90°		0.003750 m2		Glare area at 76°		0.004707 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		07-10-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1174.66 lm	
LED Flux=1811,5lm LED Power=17,5W Eff=65% EfcLed=104lm/W EfcLum=53lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E.	81 95 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		



ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %

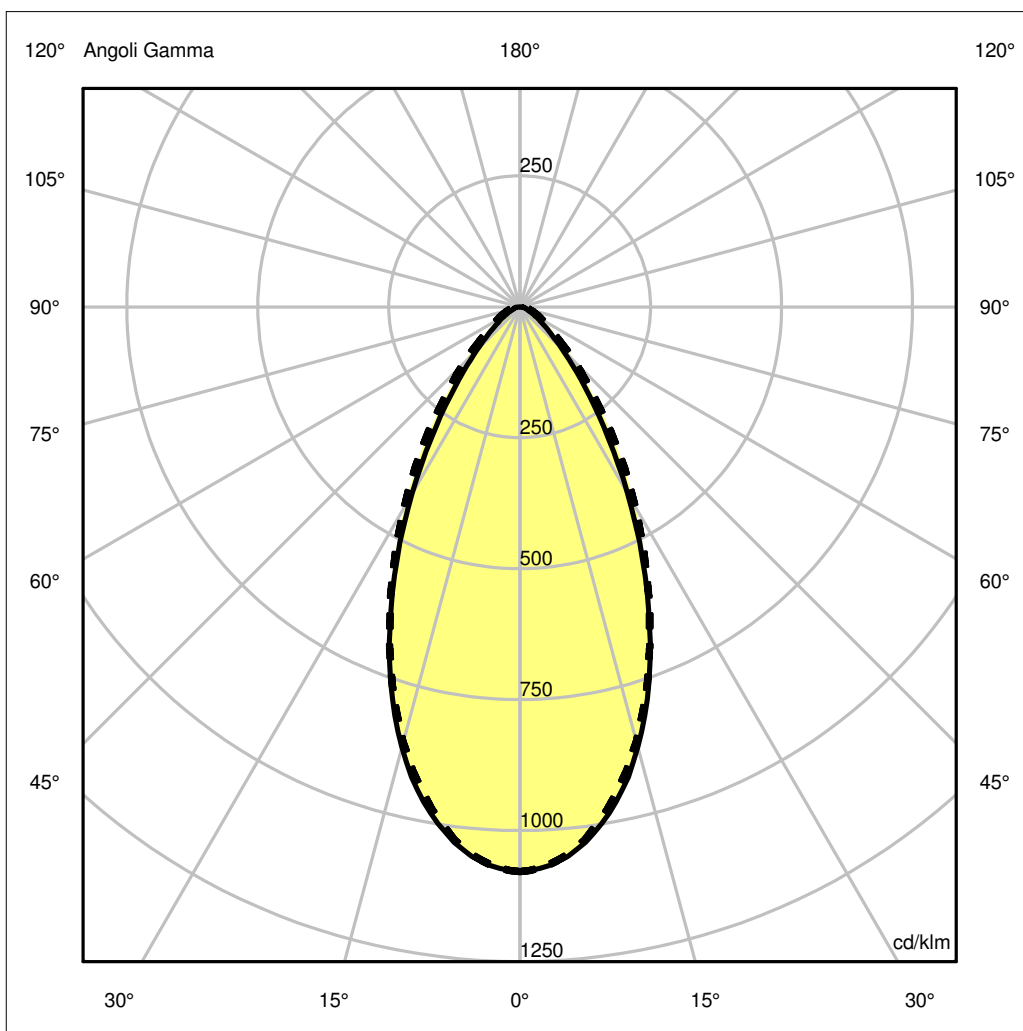

## Luminaire

Code M0671W81+M109800+M282007

Name CATA TIR SOSPENSIONE STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA WIDE FLOOD + LENTE ELLITTICA

## Measur.

Code FTS1503370


Name CATA TIR SOSPENSIONE STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA WIDE FLOOD + LENTE ELLITTICA

Luminaire Flux	1174.66 lm	Luminaire Power	22.00 W	Efficacy	53.39 lm/W	Efficiency	100.00%
Lamps Flux	1174.66 lm	Maximum value	1078.06 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	130 mm	Height	176 mm		
Round Luminous Area		Diam.	75 mm	Height	50 mm		
Horizontal Luminous Area		0.004418 m2		Emitting area on Plane 180°		0.003750 m2	
Emitting area on Plane 0°		0.003750 m2		Emitting area on Plane 270°		0.003750 m2	
Emitting area on Plane 90°		0.003750 m2		Glare area at 76°		0.004707 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		07-10-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1174.66 lm	
LED Flux=1811,5lm LED Power=17,5W Eff=65% EfcLed=104lm/W EfcLum=53lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E.	81 95 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.48	0.97	1.45	1.94	2.42	OC	0.49	0.99	1.48	1.98	2.47
OB	0.48	0.97	1.45	1.94	2.42	OD	0.49	0.99	1.48	1.98	2.47

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1266.35	1236.57	1022.02	664.38	327.93	134.39	55.66	24.12	13.50	7.59
OB	1266.35	1236.57	1022.02	664.38	327.93	134.39	55.66	24.12	13.50	7.59
OC	1266.35	1233.33	1010.62	676.88	373.18	181.30	84.19	40.73	22.84	12.41
OD	1266.35	1233.33	1010.62	676.88	373.18	181.30	84.19	40.73	22.84	12.41

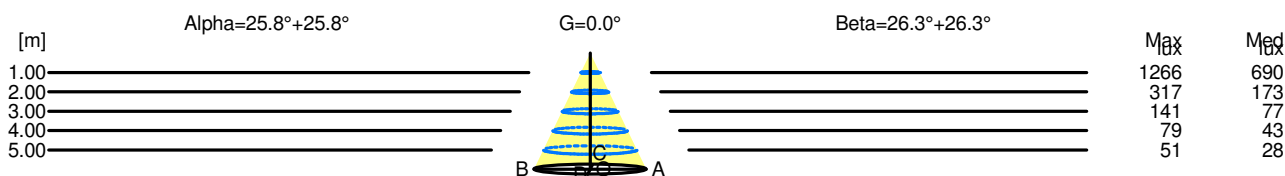

H[m]	D[m]	Max lux	Med lux	Alpha=25.8°+25.8°	G=0.0
1.00	0.97	1266	690		
2.00	1.94	317	173		
3.00	2.90	141	77		
4.00	3.87	79	43		
5.00	4.84	51	28		

H[m]	D[m]	Max lux	Med lux	Beta=26.3°+26.3°	G=0.0
1.00	0.99	1266	690		
2.00	1.98	317	173		
3.00	2.97	141	77		
4.00	3.95	79	43		
5.00	4.94	51	28		