

Luminaire

Code M0676N81+M109800+M281735

Name CATA TIR SOFFITTO FISSO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA WIDE FLOOD + FILTRO BLU

Measurement

Code FTS1503534

Name CATA TIR SOFFITTO FISSO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA WIDE FLOOD + FILTRO BLU

Luminaire Flux	215.32 lm	Luminaire Power	22.00 W	Efficacy	9.79 lm/W	Efficiency	100.00%
Lamps Flux	215.32 lm	Maximum value	820.99 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	130 mm	Height	176 mm		
Round Luminous Area		Diam.	75 mm	Height	50 mm		
Horizontal Luminous Area		0.004418 m2		Emitting area on Plane 180°		0.003750 m2	
Emitting area on Plane 0°		0.003750 m2		Emitting area on Plane 270°		0.003750 m2	
Emitting area on Plane 90°		0.003750 m2		Glare area at 76°		0.004707 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-10-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		215.32 lm	
LED Flux=1943,3lm LED Power=17,5W Eff=11% EfcLed=111lm/W EfcLum=10lm/W L70(6K)=36000h							
C.I.E.	50 74 89 100 100			D DIN 5040	A30		
F UTE	1.00 E			B NBN	BZ 3 / 0.6 / BZ 4 / 1.25 / BZ 5		

Diam=130mm




Semipiani C

180.0 — 0.0

ULOR 0.22 %

DLOR 99.78 %

RN 0.22 %

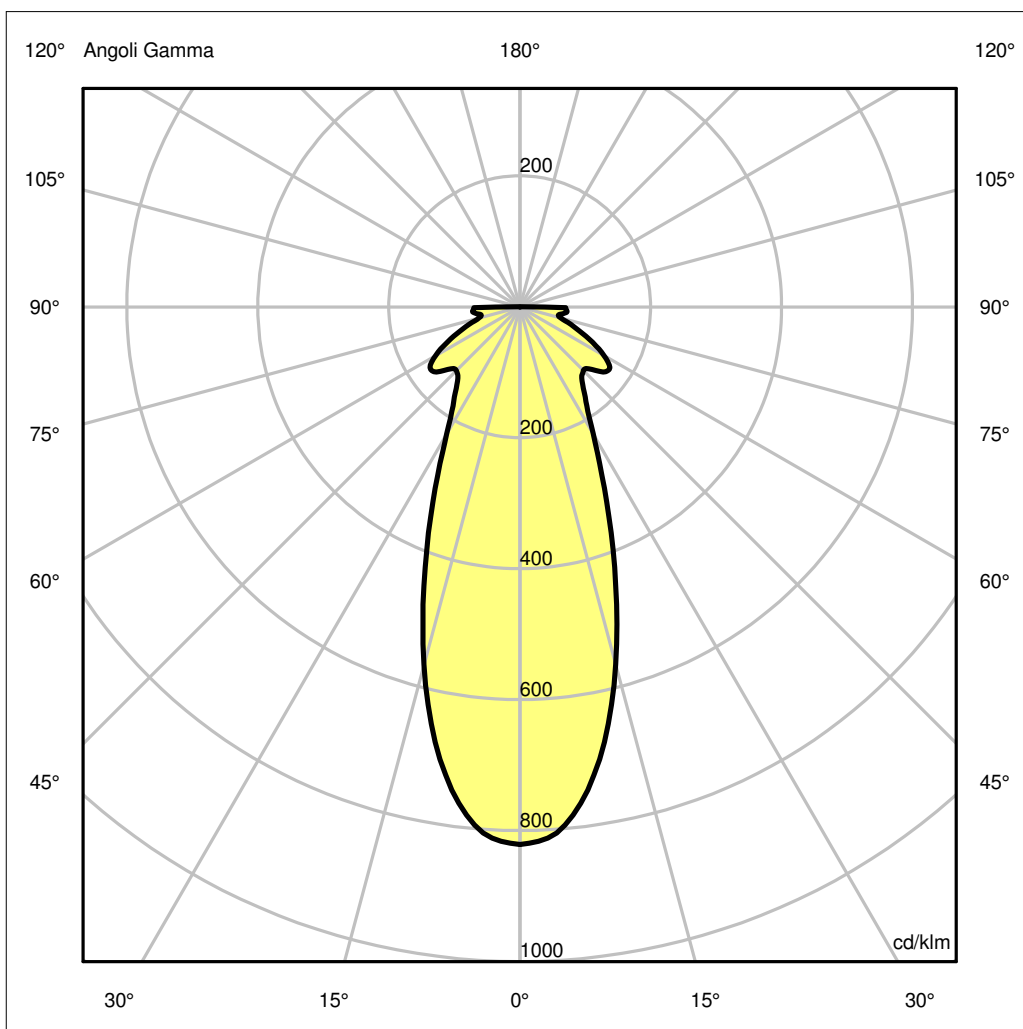

Luminaire

Code M0676N81+M109800+M281735

Name CATA TIR SOFFITTO FISSO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA WIDE FLOOD + FILTRO BLU

Measurement

Code FTS1503534


Name CATA TIR SOFFITTO FISSO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA WIDE FLOOD + FILTRO BLU

Luminaire Flux	215.32 lm	Luminaire Power	22.00 W	Efficacy	9.79 lm/W	Efficiency	100.00%
Lamps Flux	215.32 lm	Maximum value	820.99 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	130 mm	Height	176 mm		
Round Luminous Area		Diam.	75 mm	Height	50 mm		
Horizontal Luminous Area		0.004418 m2		Emitting area on Plane 180°		0.003750 m2	
Emitting area on Plane 0°		0.003750 m2		Emitting area on Plane 270°		0.003750 m2	
Emitting area on Plane 90°		0.003750 m2		Glare area at 76°		0.004707 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-10-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		215.32 lm	
LED Flux=1943,3lm LED Power=17,5W Eff=11% EfcLed=111lm/W EfcLum=10lm/W L70(6K)=36000h							
C.I.E.	50 74 89 100 100			D DIN 5040	A30		
F UTE	1.00 E			B NBN	BZ 3 / 0.6 / BZ 4 / 1.25 / BZ 5		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.37	0.75	1.12	1.49	1.87	OC	0.37	0.75	1.12	1.49	1.87
OB	0.37	0.75	1.12	1.49	1.87	OD	0.37	0.75	1.12	1.49	1.87

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	176.78	171.03	121.77	65.85	37.93	29.59	35.85	25.15	13.80	15.60
OB	176.78	171.03	121.77	65.85	37.93	29.59	35.85	25.15	13.80	15.60
OC	176.78	171.03	121.77	65.85	37.93	29.59	35.85	25.15	13.80	15.60
OD	176.78	171.03	121.77	65.85	37.93	29.59	35.85	25.15	13.80	15.60

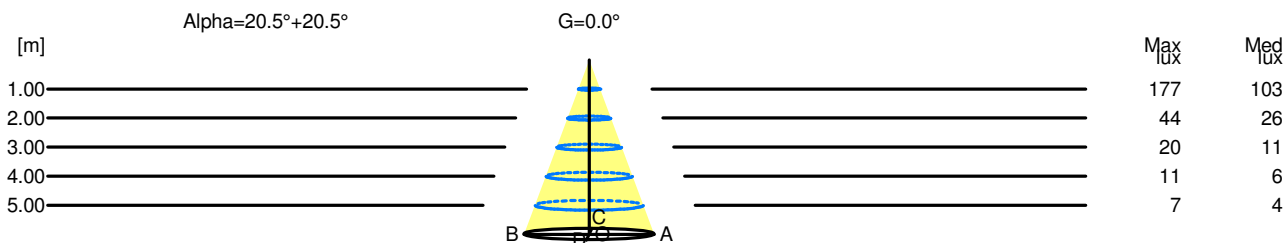

H[m]	D[m]	Max lux	Med lux	Alpha=20.5°+20.5°	G=0.0
1.00	0.75	177	103		
2.00	1.49	44	26		
3.00	2.24	20	11		
4.00	2.99	11	6		
5.00	3.74	7	4		