

Luminaire

Code M0677W81+M057800

Name CATA SOFFITTO FISSO CATADIOPTRIC STABLE WHITE UNITA' OTTICA 3000K DIMM DALI + OTTICA WIDE

Measurem.

Code FTS1502711

Name CATA SOFFITTO FISSO CATADIOPTRIC STABLE WHITE UNITA' OTTICA 3000K DIMM DALI + OTTICA WIDE

| | | | | | | | |
|--|-----------------|-----------------|---------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 2122.50 lm | Luminaire Power | 30.00 W | Efficacy | 70.75 lm/W | Efficiency | 100.00% |
| Lamps Flux | 2122.50 lm | Maximum value | 815.70 cd/klm | Position | C=0.00 G=7.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 125 mm | Height | 153 mm | | |
| Round Luminous Area | | Diam. | 125 mm | Height | 100 mm | | |
| Horizontal Luminous Area | | 0.012272 m2 | | Emitting area on Plane 180° | | 0.012500 m2 | |
| Emitting area on Plane 0° | | 0.012500 m2 | | Emitting area on Plane 270° | | 0.012500 m2 | |
| Emitting area on Plane 90° | | 0.012500 m2 | | Glare area at 76° | | 0.015098 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 24-09-2014 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 2122.50 lm | |
| LED Flux=2556lm LED Power=23W Eff=83% EfcLed=111lm/W EfcLum=71lm/W Ra=80 SDCM=3 L70(6K)=36000h | | | | | | | |
| C.I.E. | 89 95 99 97 100 | | | D DIN 5040 | A61 | | |
| F UTE | 0.97 A + 0.03 T | | | B NBN | BZ 1 | | |

Diam=125mm




Semipiani C

180.0 ——— 0.0

ULOR 3.15 %

DLOR 96.85 %

RN 3.15 %

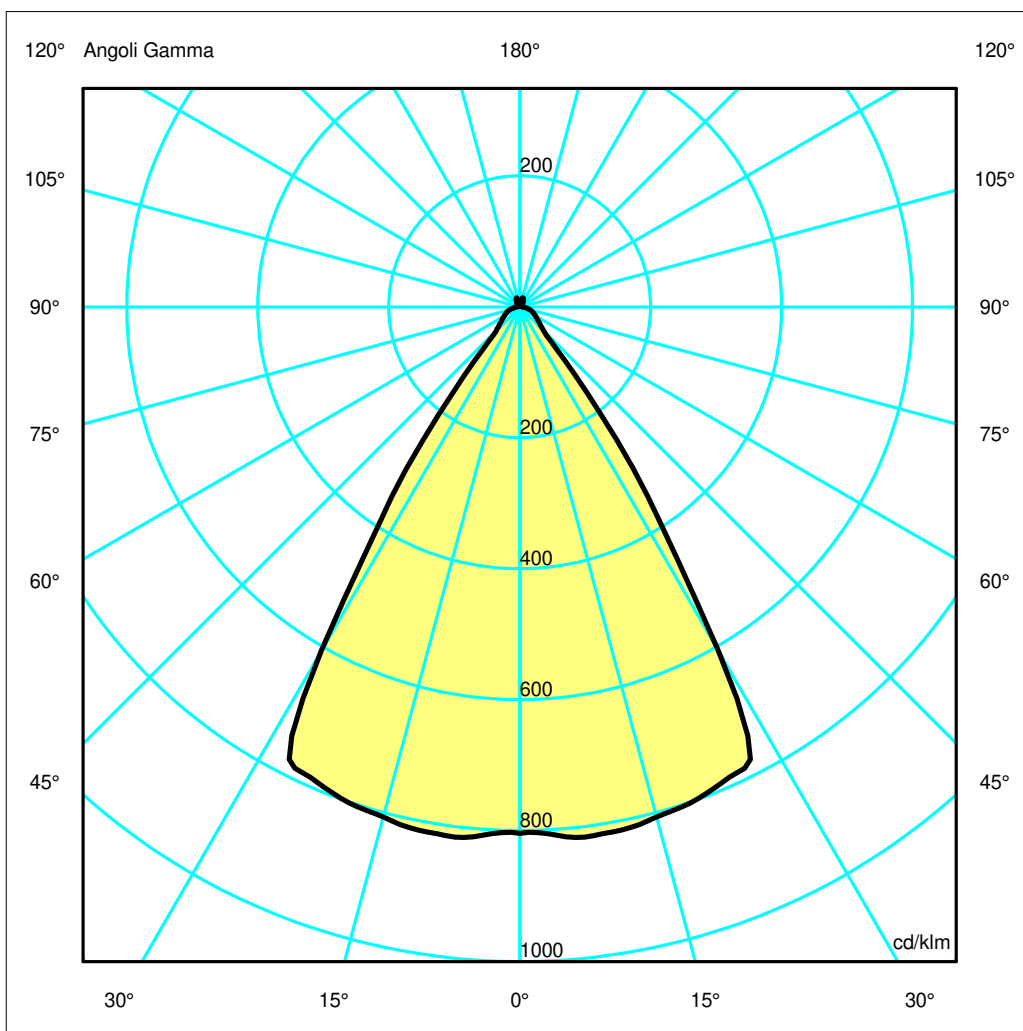

Luminaire

Code M0677W81+M057800

Name CATA SOFFITTO FISSO CATADIOPTIC STABLE WHITE UNITA' OTTICA 3000K DIMM DALI + OTTICA WIDE

Measurement

Code FTS1502711


Name CATA SOFFITTO FISSO CATADIOPTIC STABLE WHITE UNITA' OTTICA 3000K DIMM DALI + OTTICA WIDE

| | | | | | | | |
|--|-----------------|-----------------|---------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 2122.50 lm | Luminaire Power | 30.00 W | Efficacy | 70.75 lm/W | Efficiency | 100.00% |
| Lamps Flux | 2122.50 lm | Maximum value | 815.70 cd/klm | Position | C=0.00 G=7.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 125 mm | Height | 153 mm | | |
| Round Luminous Area | | Diam. | 125 mm | Height | 100 mm | | |
| Horizontal Luminous Area | | 0.012272 m2 | | Emitting area on Plane 180° | | 0.012500 m2 | |
| Emitting area on Plane 0° | | 0.012500 m2 | | Emitting area on Plane 270° | | 0.012500 m2 | |
| Emitting area on Plane 90° | | 0.012500 m2 | | Glare area at 76° | | 0.015098 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 24-09-2014 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 2122.50 lm | |
| LED Flux=2556lm LED Power=23W Eff=83% EfcLed=111lm/W EfcLum=71lm/W Ra=80 SDCM=3 L70(6K)=36000h | | | | | | | |
| C.I.E. | 89 95 99 97 100 | | | D DIN 5040 | A61 | | |
| F UTE | 0.97 A + 0.03 T | | | B NBN | BZ 1 | | |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 0.64 | 1.29 | 1.93 | 2.58 | 3.22 | OC | 0.64 | 1.29 | 1.93 | 2.58 | 3.22 |
| OB | 0.64 | 1.29 | 1.93 | 2.58 | 3.22 | OD | 0.64 | 1.29 | 1.93 | 2.58 | 3.22 |

| | | | | | | | | | | |
|----|--------------------------------|---------|---------|---------|--------|--------|-------|-------|-------|-------|
| | Luminous Intensities [cd/klm] | | | | | | | | | |
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 1706.01 | 1724.05 | 1711.95 | 1666.39 | 640.86 | 106.96 | 69.32 | 49.74 | 31.69 | 14.96 |
| OB | 1706.01 | 1724.05 | 1711.95 | 1666.39 | 640.86 | 106.96 | 69.32 | 49.74 | 31.69 | 14.96 |
| OC | 1706.01 | 1724.05 | 1711.95 | 1666.39 | 640.86 | 106.96 | 69.32 | 49.74 | 31.69 | 14.96 |
| OD | 1706.01 | 1724.05 | 1711.95 | 1666.39 | 640.86 | 106.96 | 69.32 | 49.74 | 31.69 | 14.96 |

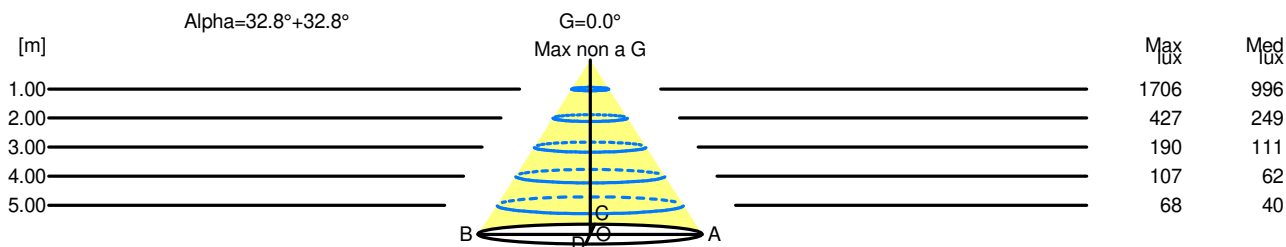

| H[m] | D[m] | Max lux | Med lux | Alpha=32.8°+32.8° | G=0.0 Max non a G |
|------|------|---------|---------|-------------------|----------------------|
| 1.00 | 1.29 | 1706 | 996 | | |
| 2.00 | 2.58 | 427 | 249 | | |
| 3.00 | 3.86 | 190 | 111 | | |
| 4.00 | 5.15 | 107 | 62 | | |
| 5.00 | 6.44 | 68 | 40 | | |