

## Luminaire

Code AM04005\_DMX175  
Name LOT Reflector Track - DMX175 CH1 175 - CH2 255

## Measur.

Code FTS1702476  
Name LOT Reflector Track - DMX175 CH1 175 - CH2 255

Luminaire Flux	3338.60 lm	Luminaire Power	68.00 W	Efficacy	49.10 lm/W	Efficiency	100.00%
Lamps Flux	3338.60 lm	Maximum value	1447.23 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 210 mm Diam. 40 mm	Height 35 mm Height 0 mm					
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001257 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000304 m2				
Coordinate system Date Measurement Distance	CG 29-11-2017 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 3338.60 lm				
Max Power=68W CCT=3000K Ra=90 SDCM=2 L70(6K)=50000 h							
C.I.E. F UTE	89 99 100 100 100 1.00 A	D DIN 5040 B NBN	A60 BZ 1				


Diam=210mm



Semipiani C

180.0 — 0.0

ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %

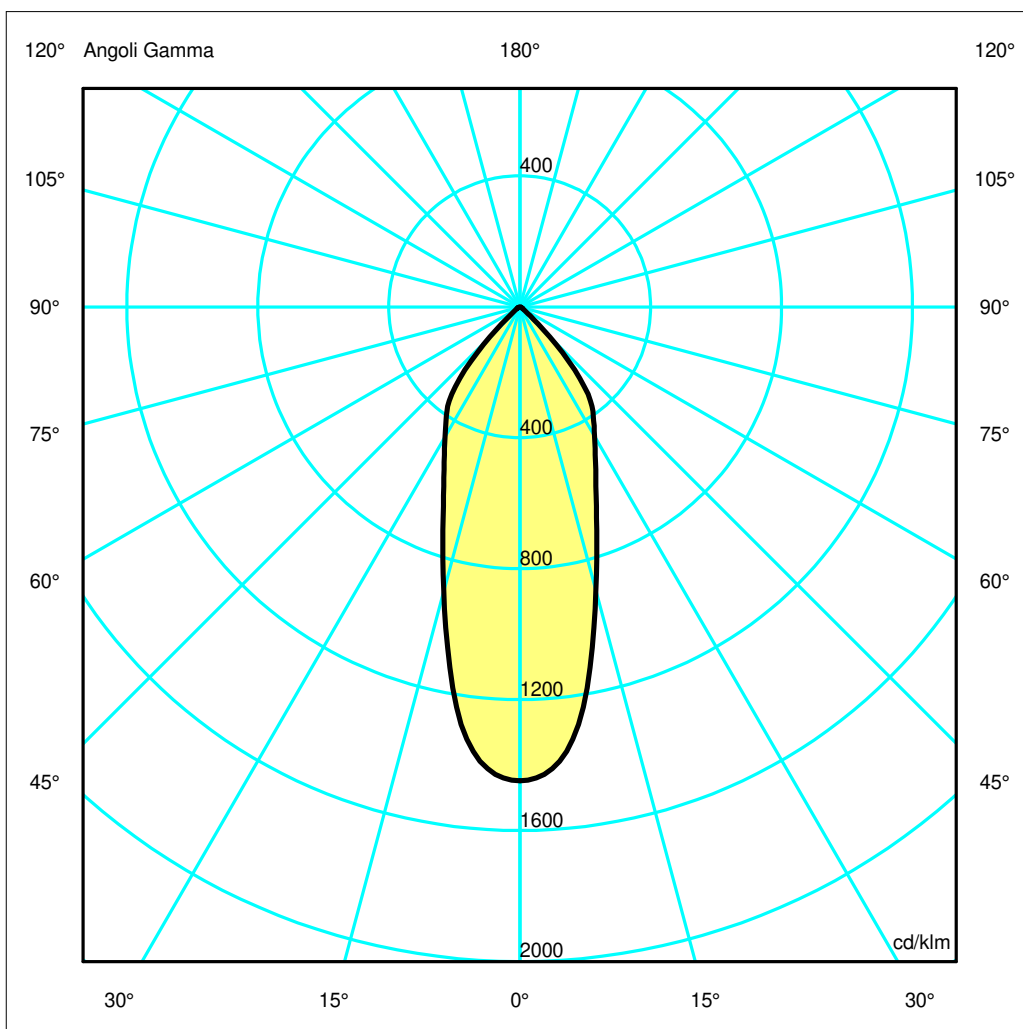

## Luminaire

Code AM04005\_DMx175  
Name LOT Reflector Track - DMX175 CH1 175 - CH2 255

## Measur.


Code FTS1702476  
Name LOT Reflector Track - DMX175 CH1 175 - CH2 255

Luminaire Flux	3338.60 lm	Luminaire Power	68.00 W	Efficacy	49.10 lm/W	Efficiency	100.00%
Lamps Flux	3338.60 lm	Maximum value	1447.23 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	210 mm 40 mm	Height Height	35 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001257 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000304 m2	
Coordinate system Date Measurement Distance		CG 29-11-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 3338.60 lm	
Max Power=68W CCT=3000K Ra=90 SDCM=2 L70(6K)=50000 h							
C.I.E. F UTE	89 99 100 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.34	0.69	1.03	1.37	1.72	OC	0.34	0.69	1.03	1.37	1.72
OB	0.34	0.69	1.03	1.37	1.72	OD	0.34	0.69	1.03	1.37	1.72

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4831.72	4650.71	2999.98	1830.95	1297.76	432.76	55.20	20.30	7.61	2.63
OB	4831.72	4650.71	2999.98	1830.95	1297.76	432.76	55.20	20.30	7.61	2.63
OC	4831.72	4650.71	2999.98	1830.95	1297.76	432.76	55.20	20.30	7.61	2.63
OD	4831.72	4650.71	2999.98	1830.95	1297.76	432.76	55.20	20.30	7.61	2.63

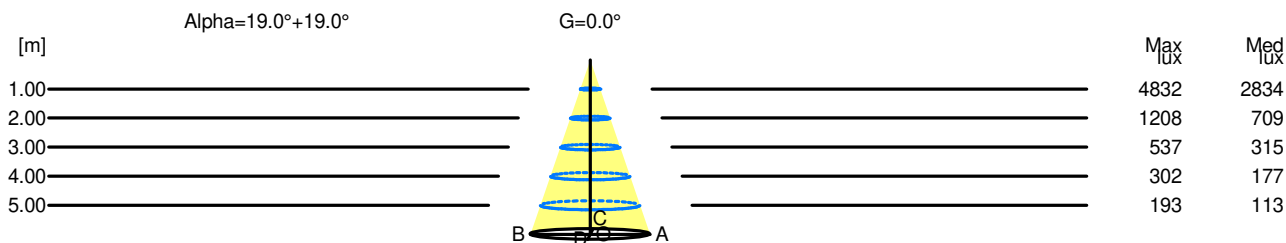

H[m]	D[m]	Max lux	Med lux	Alpha=19.0°+19.0°	G=0.0
1.00	0.69	4832	2834		
2.00	1.37	1208	709		
3.00	2.06	537	315		
4.00	2.75	302	177		
5.00	3.43	193	113		