

## Luminaire


Code AE17100+AE41001  
Name A. SHARPING 1184.DIR+IND 3X4 940 DM WIDE FLOOD + SCREENS 1184 3X4 WHITE

## Measurem.

Code FTS1603102  
Name A. SHARPING 1184.DIR+IND 3X4 940 DM WIDE FLOOD + SCREENS 1184 3X4 WHITE

Luminaire Flux	5067.89 lm	Luminaire Power	64.00 W	Efficacy	79.19 lm/W	Efficiency	100.00%
Lamps Flux	5067.89 lm	Maximum value	1255.95 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	444 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.016428 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003974 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		16-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5067.89 lm	
LED Flux=6859,55lm LED Power=55W Eff=74% EfcLed=125lm/W EfcLum=79lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	97 99 100 49 100			D DIN 5040		C62	
F UTE	--			B NBN		BZ 1	

1184mm x 40mm




Semipiani C

180.0 ——— 0.0  
270.0 - - - - - 90.0

ULOR 51.10 %

DLOR 48.90 %

RN 51.10 %

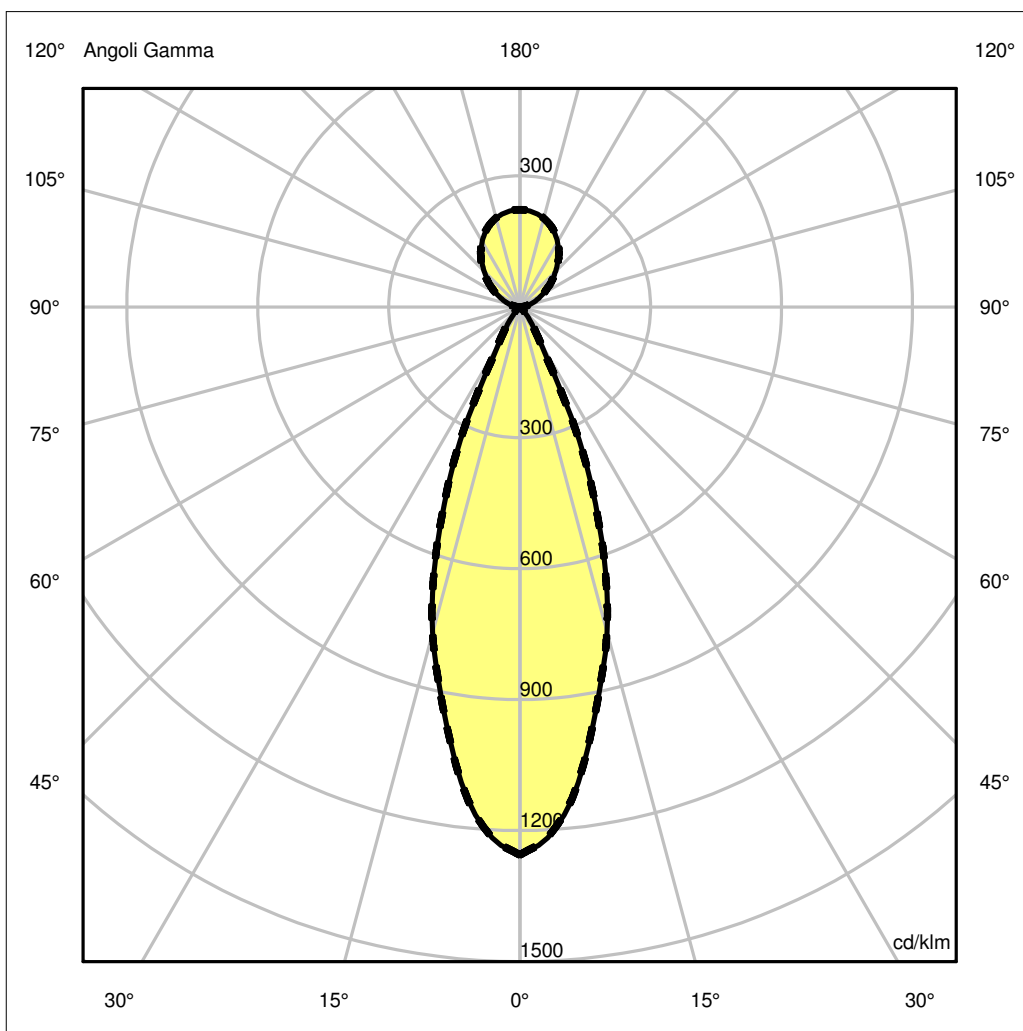

## Luminaire

Code AE17100+AE41001

Name A. SHARPING 1184.DIR+IND 3X4 940 DM WIDE FLOOD + SCREENS 1184 3X4 WHITE

## Measurerm.

Code FTS1603102


Name A. SHARPING 1184.DIR+IND 3X4 940 DM WIDE FLOOD + SCREENS 1184 3X4 WHITE

Luminaire Flux	5067.89 lm	Luminaire Power	64.00 W	Efficacy	79.19 lm/W	Efficiency	100.00%
Lamps Flux	5067.89 lm	Maximum value	1255.95 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	444 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.016428 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003974 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		16-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5067.89 lm	
LED Flux=6859,55lm LED Power=55W Eff=74% EfcLed=125lm/W EfcLum=79lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	97	99	100	49	100	D DIN 5040	C62
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.66	0.98	1.31	1.64	OC	0.33	0.66	0.98	1.31	1.64
OB	0.33	0.66	0.98	1.31	1.64	OD	0.33	0.66	0.98	1.31	1.64

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6365.03	5920.66	3916.16	1408.42	248.53	58.62	15.21	8.22	5.32	2.08
OB	6365.03	5920.66	3916.16	1408.42	248.53	58.62	15.21	8.22	5.32	2.08
OC	6365.03	5920.66	3916.16	1408.42	248.53	58.62	15.21	8.22	5.32	2.08
OD	6365.03	5920.66	3916.16	1408.42	248.53	58.62	15.21	8.22	5.32	2.08

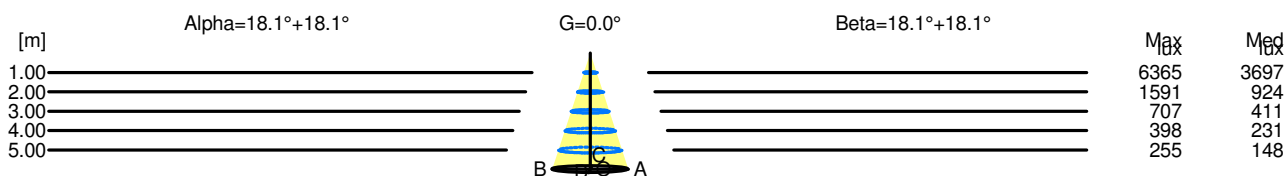

H[m]	D[m]	Max lux	Med lux	Alpha=18.1°+18.1°	G=0.0
1.00	0.66	6365	3697		
2.00	1.31	1591	924		
3.00	1.97	707	411		
4.00	2.62	398	231		
5.00	3.28	255	148		

H[m]	D[m]	Max lux	Med lux	Beta=18.1°+18.1°	G=0.0
1.00	0.66	6365	3697		
2.00	1.31	1591	924		
3.00	1.97	707	411		
4.00	2.62	398	231		
5.00	3.28	255	148		