

Luminaire

Code M2883W00+M217300

Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K NON DIMMERABILE 1184MM + INDIRETTA LED+ OTTICA WALL WASHER PER LED


Measurement

Code FTS1601565

Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K NON DIMMERABILE 1184MM + INDIRETTA LED+ OTTICA WALL WASHER PER LED

Luminaire Flux	4654 lm	Luminaire Power	62.0 W	Efficacy	75.064 lm/W	Efficiency	100.00%
Source Flux	4654 lm	Maximum value	279.12 cd/klm	Position	C=180.00 G=7.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	1185 mm	Width	45 mm	Height	110 mm
Rectangular Luminous Area		Length	1185 mm	Width	32 mm	Height	0 mm
Horizontal Luminous Area		0.037920 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.009174 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		13-06-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4654 lm	
LED Flux=7571,94lm LED Power=48W Eff=61% EfcLed=158lm/W EfcLum=75lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	62 89 98 47 100			D DIN 5040	C52		
F UTE	0.47 C + 0.53 T			B NBN	BZ 3		

1185mm x 45mm




Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 53.15 %

DLOR 46.85 %

RN 53.15 %

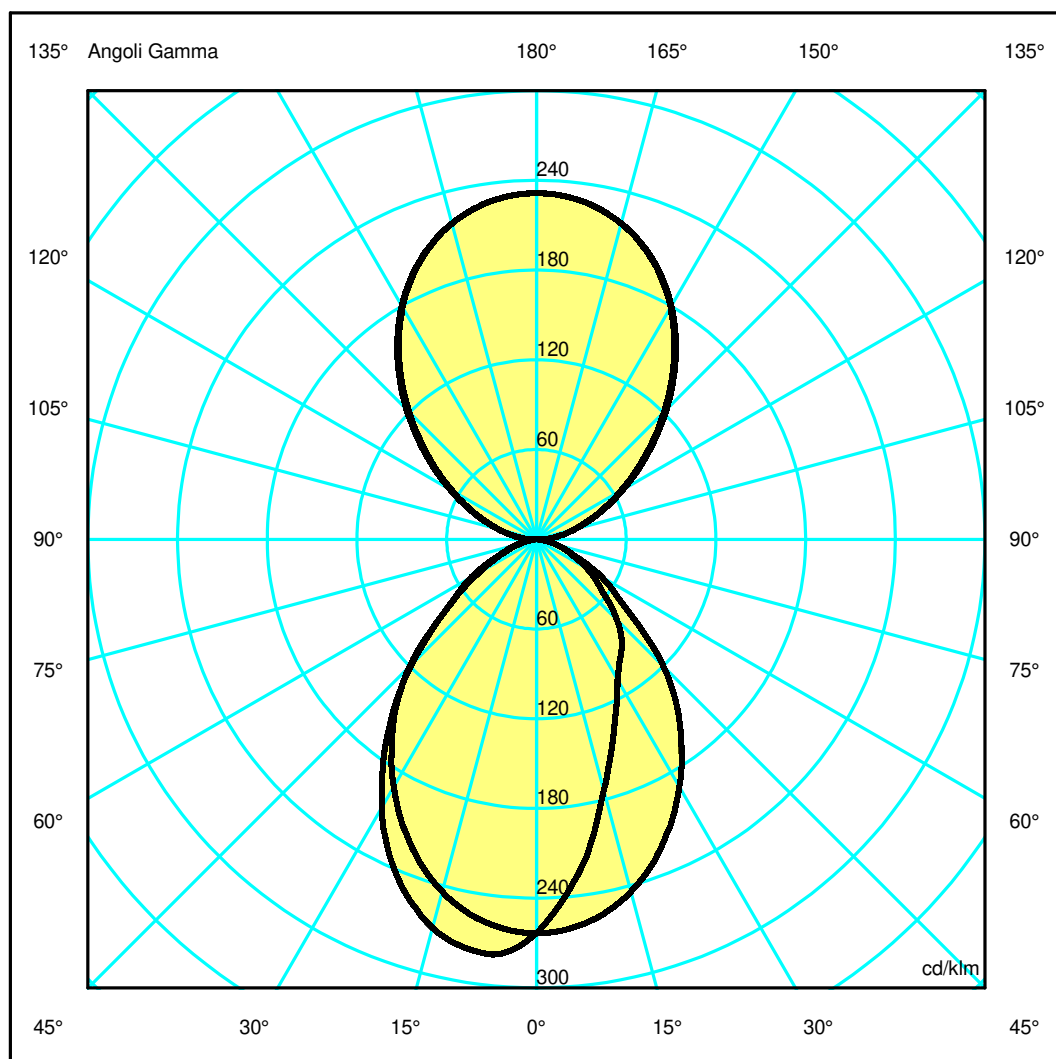

Luminaire

Code M2883W00+M217300

Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K NON DIMMERABILE 1184MM + INDIRETTA LED+ OTTICA WALL WASHER PER LED

Measurem.

Code FTS1601565


Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K NON DIMMERABILE 1184MM + INDIRETTA LED+ OTTICA WALL WASHER PER LED

Luminaire Flux	4654 lm	Luminaire Power	62.0 W	Efficacy	75.064 lm/W	Efficiency	100.00%
Source Flux	4654 lm	Maximum value	279.12 cd/klm	Position	C=180.00 G=7.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	1185 mm	Width	45 mm	Height	110 mm
Rectangular Luminous Area		Length	1185 mm	Width	32 mm	Height	0 mm
Horizontal Luminous Area		0.037920 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.009174 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		13-06-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4654 lm	
LED Flux=7571,94lm LED Power=48W Eff=61% EfcLed=158lm/W EfcLum=75lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	62 89 98 47 100			D DIN 5040	C52		
F UTE	0.47 C + 0.53 T			B NBN	BZ 3		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.52	1.04	1.56	2.08	2.60	OC	0.93	1.87	2.80	3.74	4.67
OB	0.76	1.53	2.29	3.05	3.81	OD	0.93	1.87	2.80	3.74	4.67

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1225.15	1103.69	808.16	586.04	453.78	353.78	228.81	132.52	64.15	11.42
OB	1225.15	1295.09	1251.58	1083.76	829.54	549.02	297.70	140.70	54.49	9.19
OC	1225.15	1215.23	1134.67	984.29	786.95	558.30	304.17	153.30	65.86	13.12
OD	1225.15	1215.23	1134.67	984.29	786.95	558.30	304.17	153.30	65.86	13.12

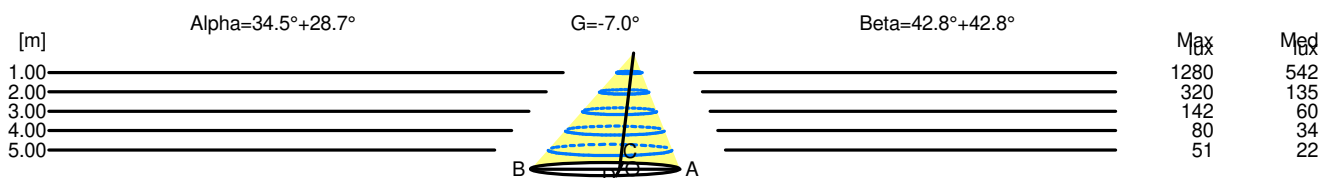

H[m]	D[m]	Max lux	Med lux	Alpha=34.5°+28.7°	G=-7.0	
1.00	1.28	1280	542			
2.00	2.57	320	135			
3.00	3.85	142	60			
4.00	5.13	80	34			
5.00	6.42	51	22			

H[m]	D[m]	Max lux	Med lux	Beta=42.8°+42.8°	G=0.0	
1.00	1.87	1280	542			
2.00	3.74	320	135			
3.00	5.60	142	60			
4.00	7.47	80	34			
5.00	9.34	51	22			