

Luminaire

Code M2945W00
Name ALGORITMO PLATINE PAD E PAD SQUARE+INDIRETTA LED 3000K N/D

Measurem.

Code FTS1701417
Name ALGORITMO PLATINE PAD E PAD SQUARE+INDIRETTA LED 3000K N/D

Luminaire Flux	2475.39 lm	Luminaire Power	27.00 W	Efficacy	91.68 lm/W	Efficiency	100.00%
Lamps Flux	2475.39 lm	Maximum value	435.64 cd/klm	Position	C=0.00 G=180.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	37 mm	Height	25 mm
Rectangular Luminous Area		Length	950 mm	Width	28 mm	Height	0 mm
Horizontal Luminous Area		0.026600 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006435 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		23-06-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2475.39 lm	
LED Flux=3214,8lm LED Power=22W Eff=77% EfcLed=146lm/W EfcLum=92lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	0 0 0 0 100			D DIN 5040	--		
F UTE	1.00 T			B NBN	BZ 10		

1184mm x 37mm




Semipiani C

180.0 ——— 0.0
270.0 - - - - - 90.0

ULOR 99.92 %

DLOR 0.08 %

RN 99.92 %

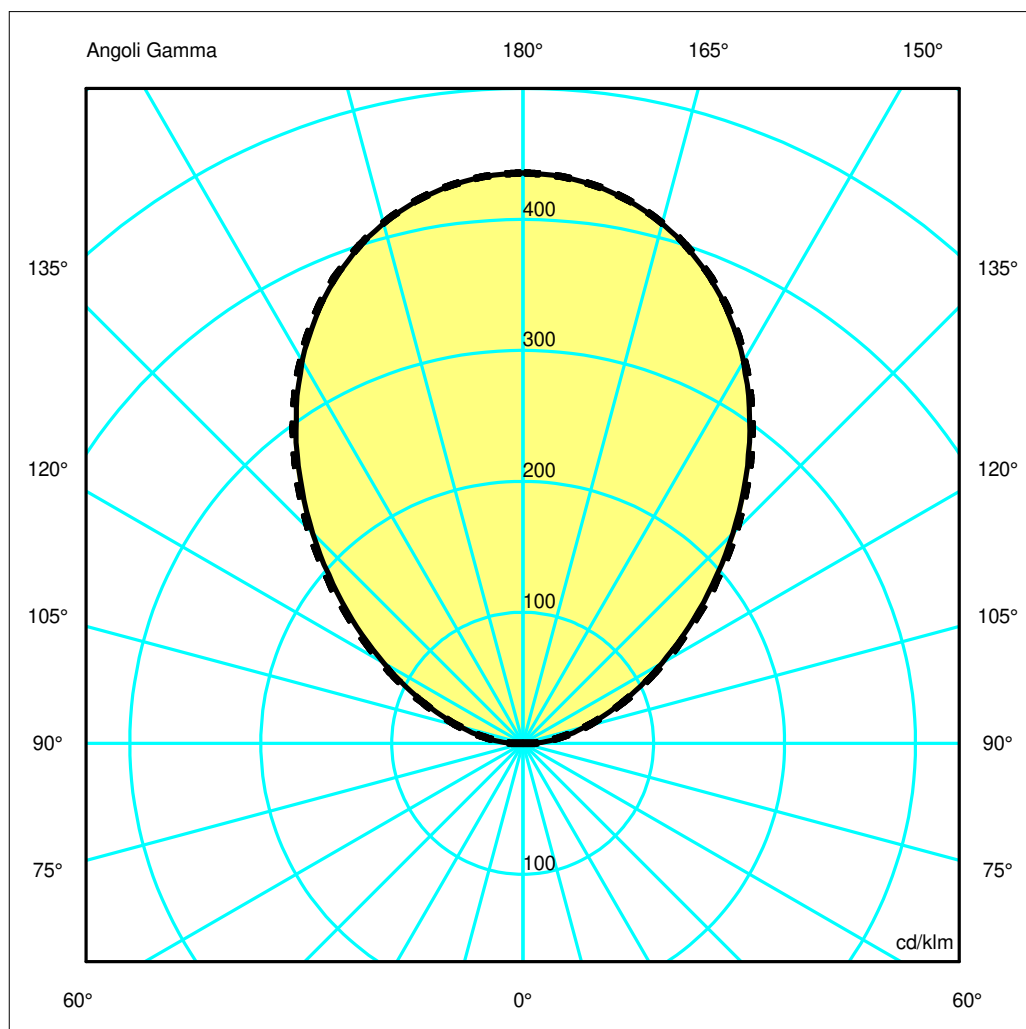

Luminaire

Code M2945W00
Name ALGORITMO PLATINE PAD E PAD SQUARE+INDIRETTA LED 3000K N/D

Measur.

Code FTS1701417
Name ALGORITMO PLATINE PAD E PAD SQUARE+INDIRETTA LED 3000K N/D

Luminaire Flux	2475.39 lm	Luminaire Power	27.00 W	Efficacy	91.68 lm/W	Efficiency	100.00%
Lamps Flux	2475.39 lm	Maximum value	435.64 cd/klm	Position	C=0.00 G=180.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	37 mm	Height	25 mm
Rectangular Luminous Area		Length	950 mm	Width	28 mm	Height	0 mm
Horizontal Luminous Area		0.026600 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006435 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		23-06-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2475.39 lm	
LED Flux=3214,8lm LED Power=22W Eff=77% EfcLed=146lm/W EfcLum=92lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	0 0 0 0 100			D DIN 5040	--		
F UTE	1.00 T			B NBN	BZ 10		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.04	2.08	3.12	4.16	5.21	OC	1.06	2.13	3.19	4.25	5.32
OB	1.04	2.08	3.12	4.16	5.21	OD	1.06	2.13	3.19	4.25	5.32

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1078.39	1070.71	1017.35	908.46	746.78	561.60	382.82	234.49	123.35	47.87
OB	1078.39	1070.71	1017.35	908.46	746.78	561.60	382.82	234.49	123.35	47.87
OC	1078.39	1071.16	1018.11	912.12	754.93	573.07	392.74	241.07	125.40	46.60
OD	1078.39	1071.16	1018.11	912.12	754.93	573.07	392.74	241.07	125.40	46.60

