

## Luminaire

Code AF31704+AF95004  
Name SHARP SMD.1X 3W 940 WF EXD NRO+ SCREEN 1X BLACK

## Measurem.

Code FTS1902081  
Name SHARP SMD.1X 3W 940 WF EXD NRO+ SCREEN 1X BLACK

Luminaire Flux	199 lm	Luminaire Power	3.5 W	Efficacy	56.803 lm/W	Efficiency	100.00%
Source Flux	199 lm	Maximum value	2630.91 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire		Length	41 mm	Width	45 mm	Height	90 mm
Rectangular Luminous Area		Length	37 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.001369 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000331 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		16-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		199 lm	
LED Flux=283.995lm LED Power=3.5W Eff=70% EfcLed=81lm/W EfcLum=57lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1


41mm x 45mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %

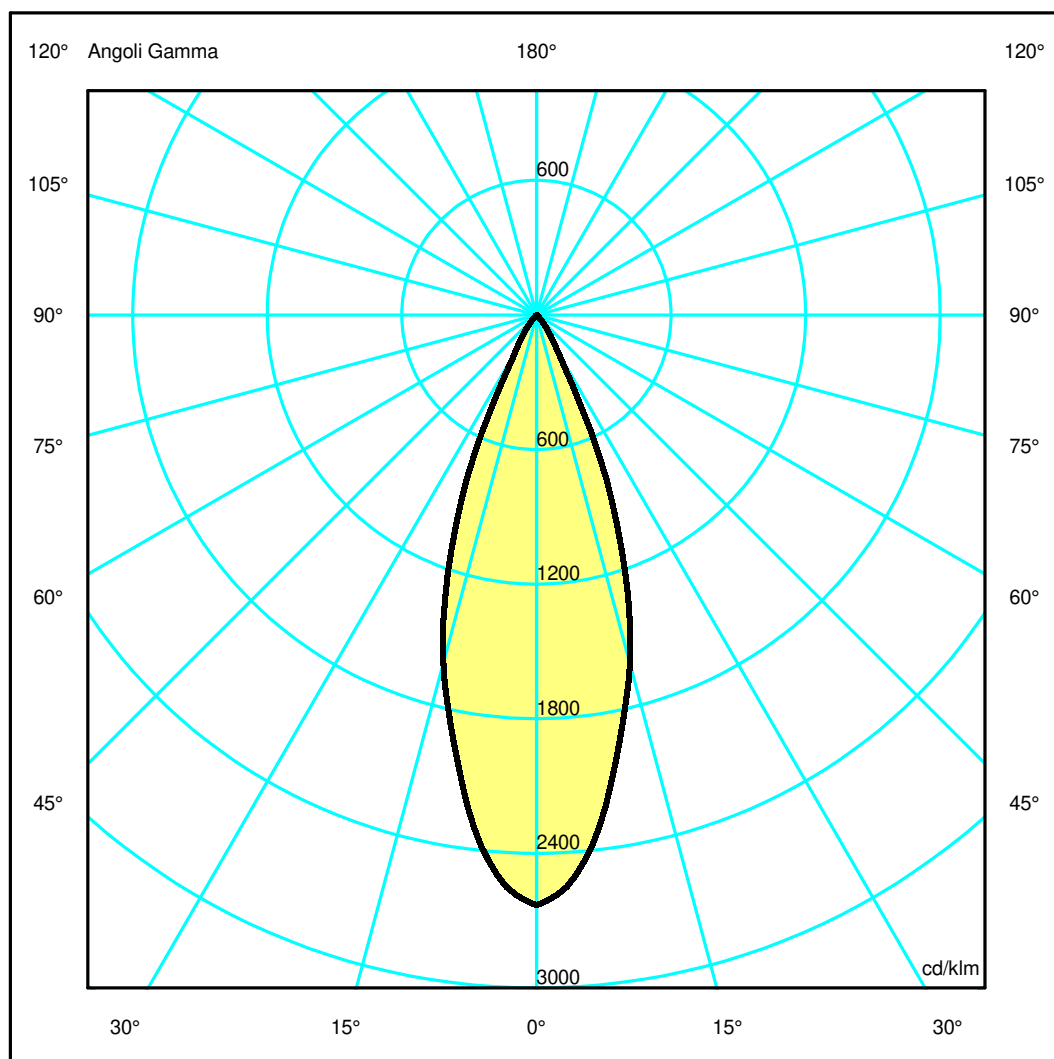

## Luminaire

Code AF31704+AF95004  
Name SHARP SMD.1X 3W 940 WF EXD NRO+ SCREEN 1X BLACK

## Measurem.


Code FTS1902081  
Name SHARP SMD.1X 3W 940 WF EXD NRO+ SCREEN 1X BLACK

Luminaire Flux	199 lm	Luminaire Power	3.5 W	Efficacy	56.803 lm/W	Efficiency	100.00%
Source Flux	199 lm	Maximum value	2630.91 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire		Length	41 mm	Width	45 mm	Height	90 mm
Rectangular Luminous Area		Length	37 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.001369 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000331 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		16-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		199 lm	
LED Flux=283.995lm LED Power=3.5W Eff=70% EfcLed=81lm/W EfcLum=57lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.65	0.98	1.30	1.63	OC	0.33	0.65	0.98	1.30	1.63
OB	0.33	0.65	0.98	1.30	1.63	OD	0.33	0.65	0.98	1.30	1.63

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	523.05	485.89	319.50	113.90	19.36	3.90	0.46	0.06	0.00	0.00
OB	523.05	485.89	319.50	113.90	19.36	3.90	0.46	0.06	0.00	0.00
OC	523.05	485.89	319.50	113.90	19.36	3.90	0.46	0.06	0.00	0.00
OD	523.05	485.89	319.50	113.90	19.36	3.90	0.46	0.06	0.00	0.00

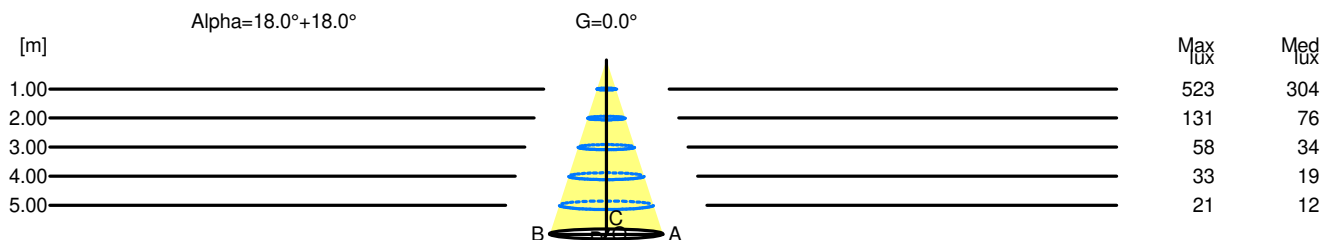

H[m]	D[m]	Max lux	Med lux	Alpha=18.0°+18.0°	G=0.0
1.00	0.65	523	304		
2.00	1.30	131	76		
3.00	1.95	58	34		
4.00	2.60	33	19		
5.00	3.25	21	12		