

Luminaire

Code BB00300_50
Name LUCERI TLESS ROUND 50W 930 COMFORT

Measurement

Code FTS1801143-A
Name LUCERI TLESS ROUND 50W 930 COMFORT

Luminaire Flux	4903 lm	Luminaire Power	50.0 W	Efficacy	98.060 lm/W	Efficiency	100.00%
Source Flux	4903 lm	Maximum value	738.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	211 mm	Height	215 mm		
Round Luminous Area		Diam.	200 mm	Height	0 mm		
Horizontal Luminous Area		0.031416 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007600 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		25-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4903 lm	
LED Flux=6047lm LED Power=50W Eff=81% EfcLed=121lm/W EfcLum=98lm/W CCT=3000K Ra=90 R9=50 SDCM=1 L70(10k)=50000h							
C.I.E.	77 92 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1 / 1.5 / BZ 2		


Diam=211mm



Semipiani C

180.0 — 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

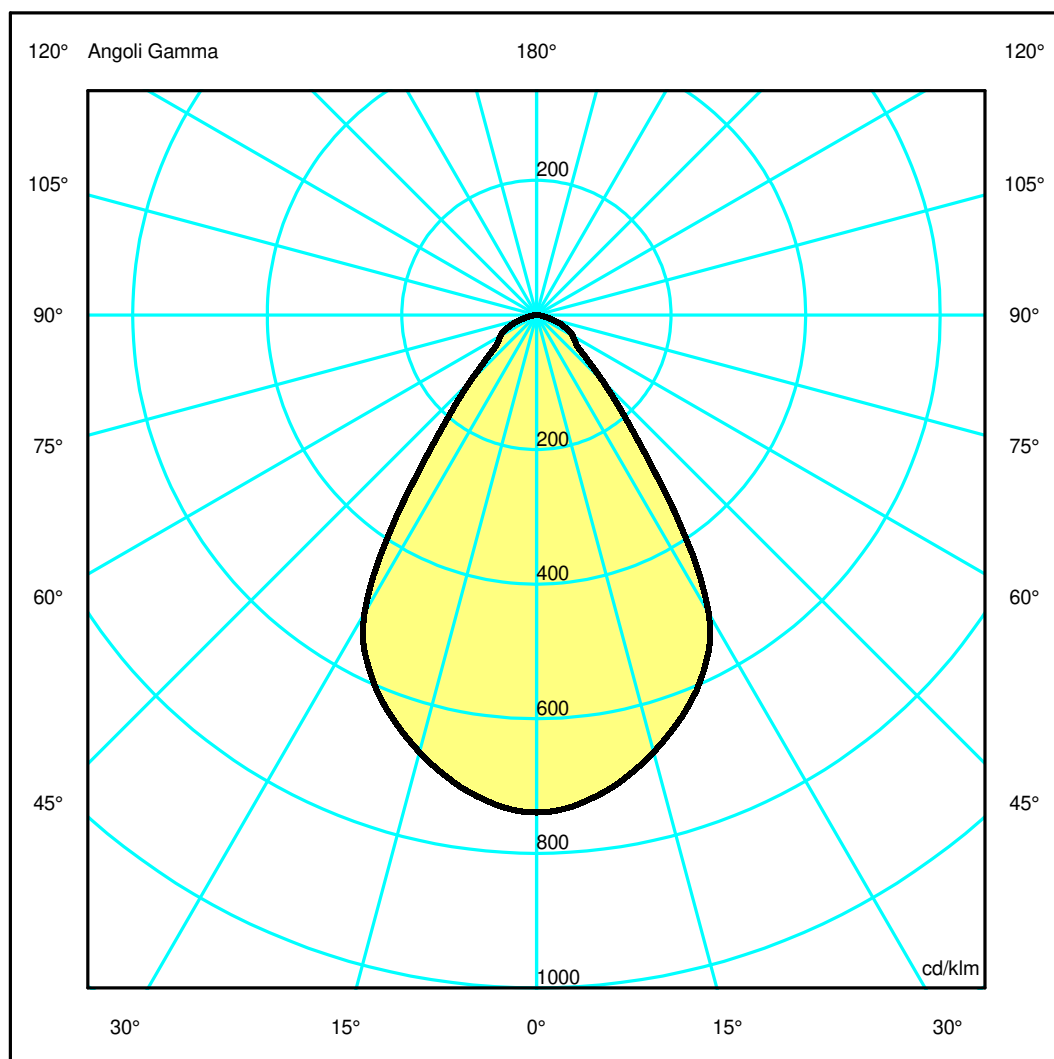

Luminaire

Code BB00300_50
Name LUCERI TLESS ROUND 50W 930 COMFORT

Measurem.


Code FTS1801143-A
Name LUCERI TLESS ROUND 50W 930 COMFORT

Luminaire Flux	4903 lm	Luminaire Power	50.0 W	Efficacy	98.060 lm/W	Efficiency	100.00%
Source Flux	4903 lm	Maximum value	738.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	211 mm	Height	215 mm		
Round Luminous Area		Diam.	200 mm	Height	0 mm		
Horizontal Luminous Area		0.031416 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007600 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		25-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4903 lm	
LED Flux=6047lm LED Power=50W Eff=81% EfcLed=121lm/W EfcLum=98lm/W CCT=3000K Ra=90 R9=50 SDCM=1 L70(10k)=50000h							
C.I.E.	77 92 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1 / 1.5 / BZ 2		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.69	1.38	2.07	2.77	3.46	OC	0.69	1.38	2.07	2.77	3.46
OB	0.69	1.38	2.07	2.77	3.46	OD	0.69	1.38	2.07	2.77	3.46

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3623.16	3574.71	3296.74	2872.01	1754.80	684.99	342.84	250.06	104.32	13.99
OB	3623.16	3574.71	3296.74	2872.01	1754.80	684.99	342.84	250.06	104.32	13.99
OC	3623.16	3574.71	3296.74	2872.01	1754.80	684.99	342.84	250.06	104.32	13.99
OD	3623.16	3574.71	3296.74	2872.01	1754.80	684.99	342.84	250.06	104.32	13.99

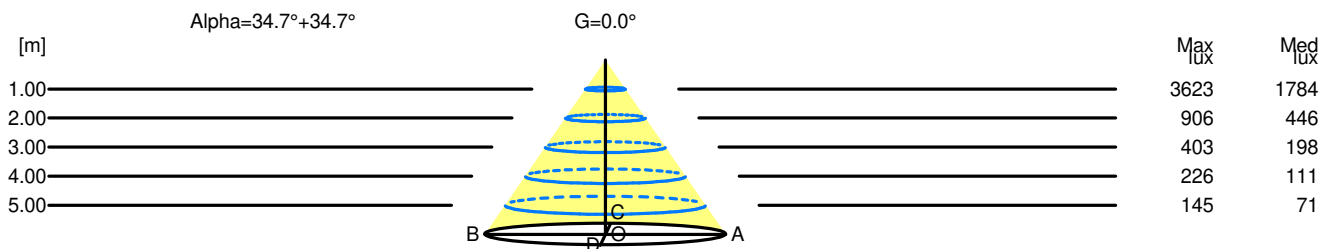

H[m]	D[m]	Max lux	Med lux	Alpha=34.7°+34.7°	G=0.0	
1.00	1.38	3623	1784			
2.00	2.77	906	446			
3.00	4.15	403	198			
4.00	5.53	226	111			
5.00	6.91	145	71			