

Luminaire

Code BB01000_25+M239700
Name LUCERI TLESS ROUND 25W 930 MIRROR + schermo opalino

Measurem.

Code FTS1801305-A
Name LUCERI TLESS ROUND 25W 930 MIRROR + schermo opalino

Luminaire Flux	2503 lm	Luminaire Power	25.0 W	Efficacy	100.120 lm/W	Efficiency	100.00%
Source Flux	2503 lm	Maximum value	440.98 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	211 mm	Height	215 mm		
Round Luminous Area		Diam.	209 mm	Height	0 mm		
Horizontal Luminous Area		0.034307 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.008300 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		25-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2503 lm	
LED Flux=3416lm LED Power=25W Eff=73% EfcLed=137lm/W EfcLum=100lm/W CCT=3000K Ra=90 R9=50 SDCM=1 L70(9k)=50000h							
C.I.E.	53 82 97 100 100			D DIN 5040		A40	
F UTE	1.00 D			B NBN		BZ 4	

Diam=211mm




Semipiani C

180.0 ——— 0.0

ULOR 0.02 %

DLOR 99.98 %

RN 0.02 %

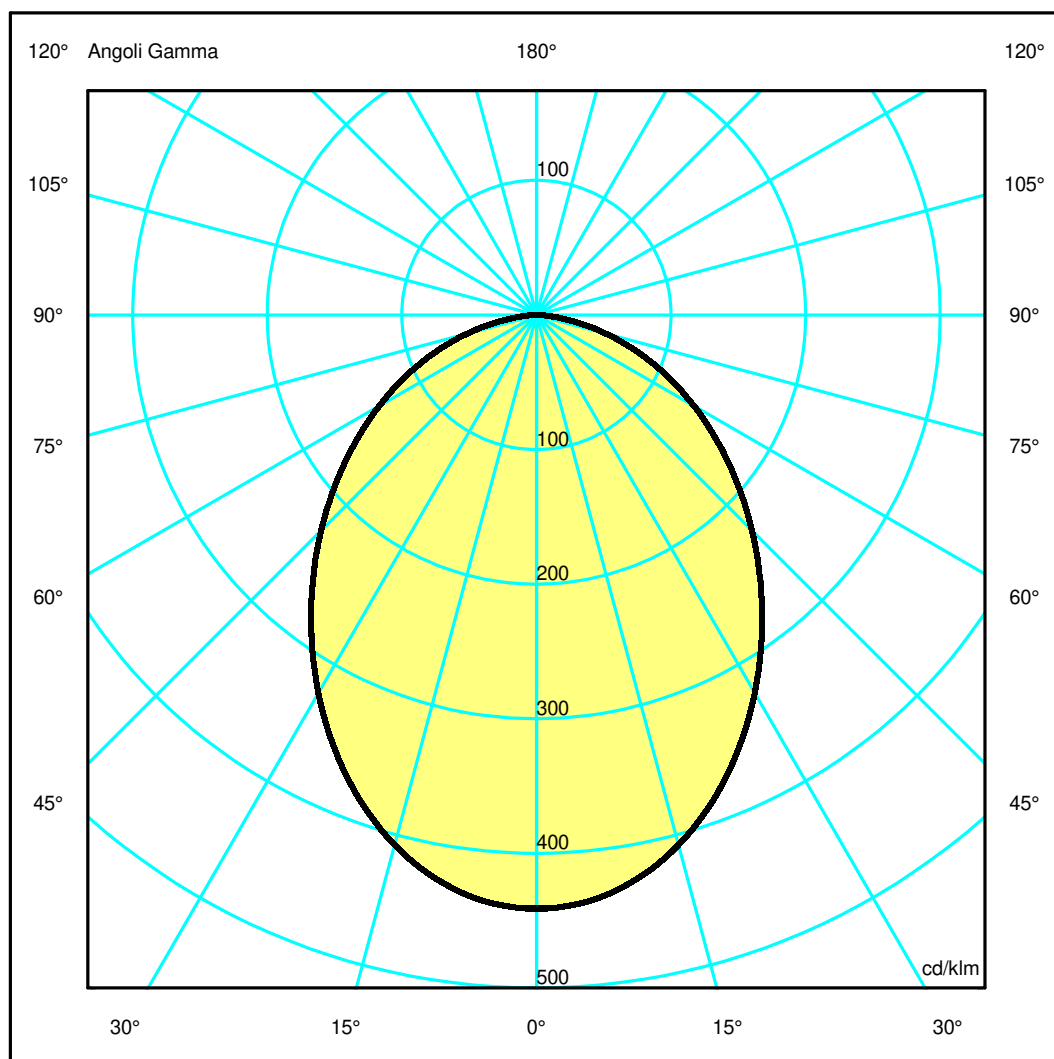

Luminaire

Code BB01000_25+M239700
Name LUCERI TLESS ROUND 25W 930 MIRROR + schermo opalino

Measurem.


Code FTS1801305-A
Name LUCERI TLESS ROUND 25W 930 MIRROR + schermo opalino

Luminaire Flux	2503 lm	Luminaire Power	25.0 W	Efficacy	100.120 lm/W	Efficiency	100.00%
Source Flux	2503 lm	Maximum value	440.98 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Round Luminaire		Diam.	211 mm	Height	215 mm		
Round Luminous Area		Diam.	209 mm	Height	0 mm		
Horizontal Luminous Area		0.034307 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.008300 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		25-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2503 lm	
LED Flux=3416lm LED Power=25W Eff=73% EfcLed=137lm/W EfcLum=100lm/W CCT=3000K Ra=90 R9=50 SDCM=1 L70(9k)=50000h							
C.I.E.	53 82 97 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.03	2.06	3.10	4.13	5.16	OC	1.03	2.06	3.10	4.13	5.16
OB	1.03	2.06	3.10	4.13	5.16	OD	1.03	2.06	3.10	4.13	5.16

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1103.77	1094.35	1020.17	889.20	730.10	566.59	411.37	267.76	134.55	26.47
OB	1103.77	1094.35	1020.17	889.20	730.10	566.59	411.37	267.76	134.55	26.47
OC	1103.77	1094.35	1020.17	889.20	730.10	566.59	411.37	267.76	134.55	26.47
OD	1103.77	1094.35	1020.17	889.20	730.10	566.59	411.37	267.76	134.55	26.47

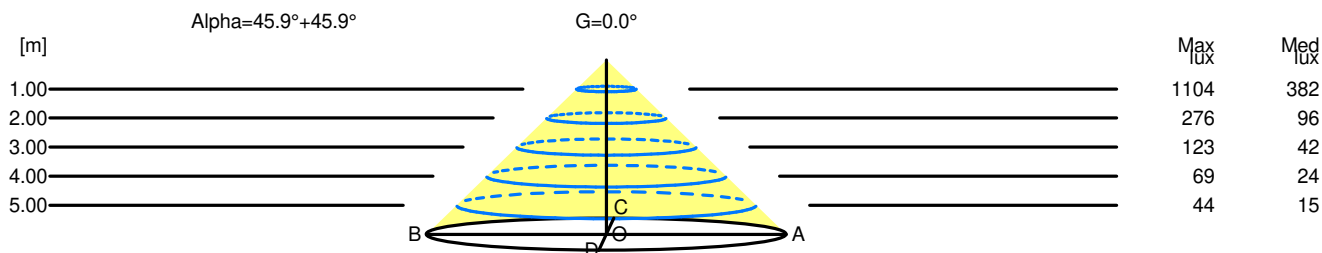

H[m]	D[m]	Max lux	Med lux	Alpha=45.9°+45.9°	G=0.0	
1.00	2.06	1104	382			
2.00	4.13	276	96			
3.00	6.19	123	42			
4.00	8.26	69	24			
5.00	10.32	44	15			