

Luminaire


Code TB50422
Name TURN AROUND SHARP.8LED XF 927 TITAN.

Measur.

Code FTS2102438
Name TURN AROUND SHARP.8LED XF 927 TITAN.

Luminaire Flux	1139 lm	Luminaire Power	14.0 W	Efficacy	81.357 lm/W	Efficiency	100.00%
Source Flux	1139 lm	Maximum value	1052.56 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	315 mm	Width	28 mm	Height	20 mm
Rectangular Luminous Area		Length	160 mm	Width	20 mm	Height	0 mm
Horizontal Luminous Area		0.003200 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000774 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		04-02-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1139 lm	
LED Flux=1316lm LED Power=11W Eff=87% EfcLed=118lm/W EfcLum=81lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(18k)=109000h							
C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1


315mm x 28mm



Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

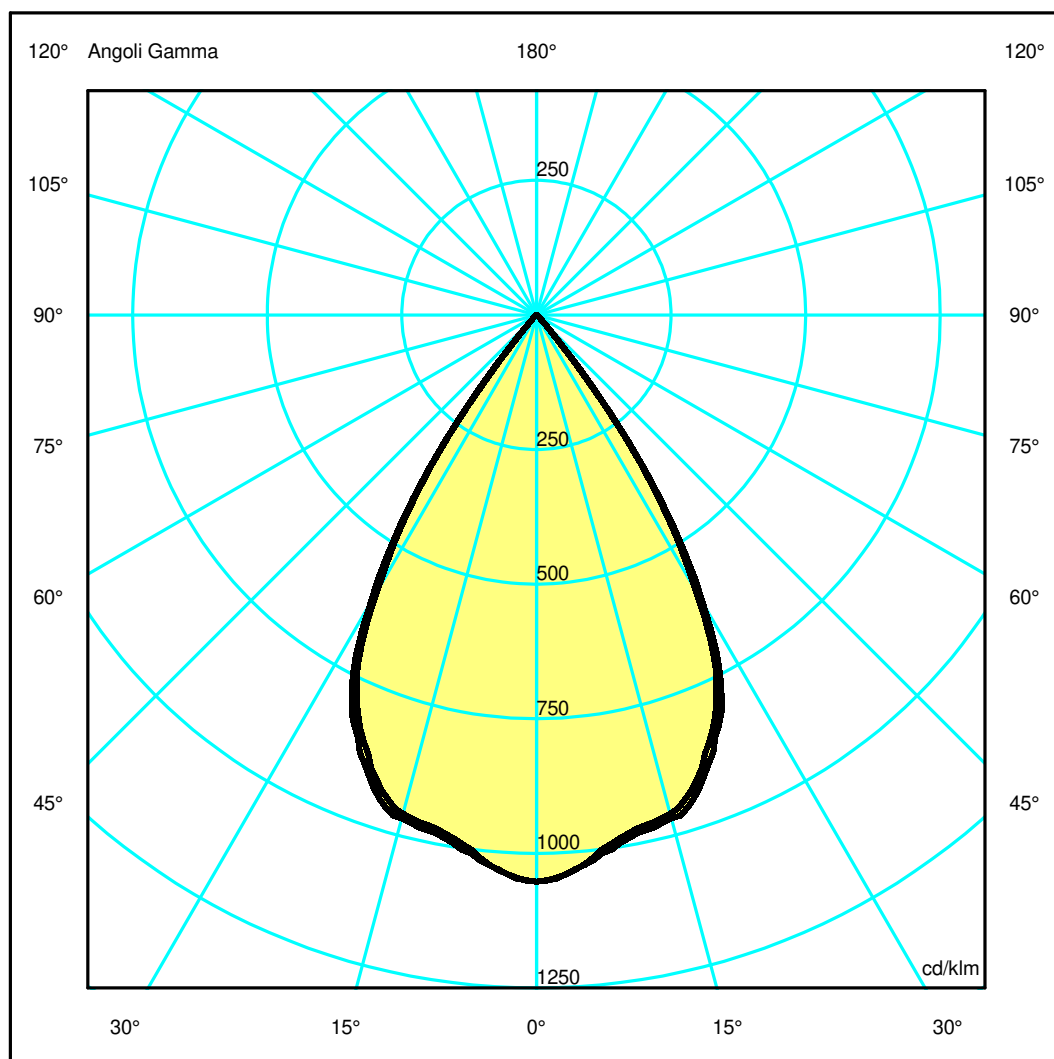

Luminaire

Code TB50422
Name TURN AROUND SHARP.8LED XF 927 TITAN.

Measurem.


Code FTS2102438
Name TURN AROUND SHARP.8LED XF 927 TITAN.

Luminaire Flux	1139 lm	Luminaire Power	14.0 W	Efficacy	81.357 lm/W	Efficiency	100.00%
Source Flux	1139 lm	Maximum value	1052.56 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	315 mm	Width	28 mm	Height	20 mm
Rectangular Luminous Area		Length	160 mm	Width	20 mm	Height	0 mm
Horizontal Luminous Area		0.003200 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000774 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		04-02-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1139 lm	
LED Flux=1316lm LED Power=11W Eff=87% EfcLed=118lm/W EfcLum=81lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(18k)=109000h							
C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.61	1.22	1.83	2.44	3.05	OC	0.62	1.24	1.87	2.49	3.11
OB	0.61	1.22	1.83	2.44	3.05	OD	0.62	1.24	1.87	2.49	3.11

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1198.86	1166.21	1091.90	901.07	386.21	14.72	3.10	0.83	0.00	0.00
OB	1198.86	1166.21	1091.90	901.07	386.21	14.72	3.10	0.83	0.00	0.00
OC	1198.86	1167.63	1102.10	926.30	401.57	14.29	3.07	0.88	0.00	0.00
OD	1198.86	1167.63	1102.10	926.30	401.57	14.29	3.07	0.88	0.00	0.00

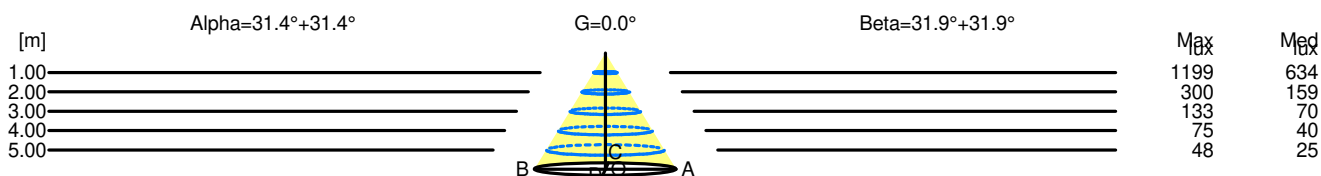

H[m]	D[m]	Max lux	Med lux	Alpha=31.4°+31.4°	G=0.0
1.00	1.22	1199	634		
2.00	2.44	300	159		
3.00	3.66	133	70		
4.00	4.88	75	40		
5.00	6.10	48	25		

H[m]	D[m]	Max lux	Med lux	Beta=31.9°+31.9°	G=0.0
1.00	1.24	1199	634		
2.00	2.49	300	159		
3.00	3.73	133	70		
4.00	4.98	75	40		
5.00	6.22	48	25		