

Luminaire

Code BQ90204+AP91300
Name VECTOR 40 WALL NO SW 930 FL BLK + SOFT FILTER

Measurem.

Code FTS2300024
Name VECTOR 40 WALL NO SW 930 FL BLK + SOFT FILTER

| | | | | | | | |
|--|-------------------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 337 lm | Luminaire Power | 8.5 W | Efficacy | 39.591 lm/W | Efficiency | 100.00% |
| Source Flux | 337 lm | Maximum value | 3823.34 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 40 mm | Height | 103 mm | | |
| Round Luminous Area | | Diam. | 27 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.000573 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000139 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 08-11-2022 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 337 lm | |
| LED Flux=711lm LED Power=6W Eff=47% EfcLed=115lm/W EfcLum=40lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h | | | | | | | |
| C.I.E. | 97 99 100 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | -- | | | B NBN | BZ 1 | | |

Diam=40mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

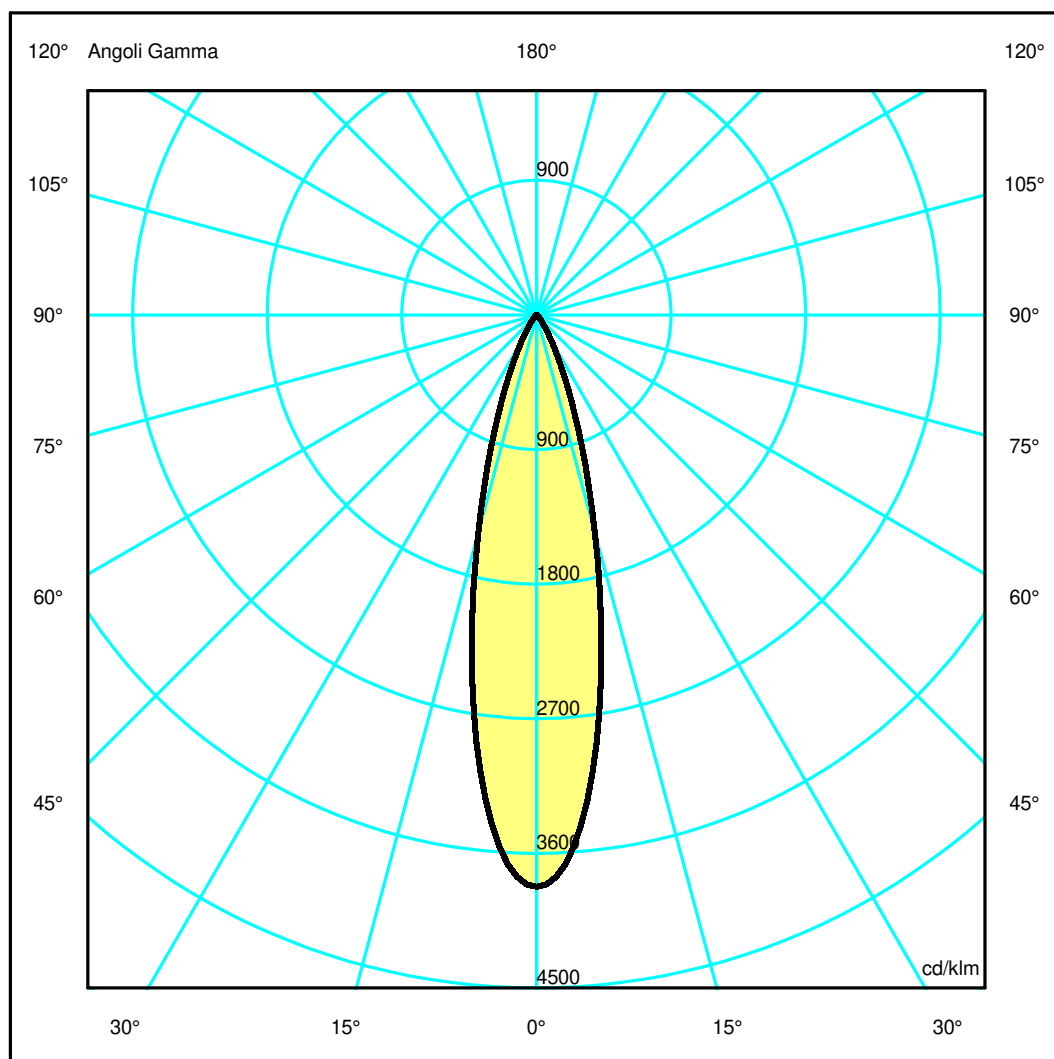

Luminaire

Code BQ90204+AP91300
Name VECTOR 40 WALL NO SW 930 FL BLK + SOFT FILTER

Measurem.


Code FTS2300024
Name VECTOR 40 WALL NO SW 930 FL BLK + SOFT FILTER

| | | | | | | | |
|--|-------------------|-----------------|----------------|-----------------------------|---------------|--------------------|---------|
| Luminaire Flux | 337 lm | Luminaire Power | 8.5 W | Efficacy | 39.591 lm/W | Efficiency | 100.00% |
| Source Flux | 337 lm | Maximum value | 3823.34 cd/klm | Position | C=0.00 G=0.00 | CG Rotosymmetrical | |
| Round Luminaire | | Diam. | 40 mm | Height | 103 mm | | |
| Round Luminous Area | | Diam. | 27 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.000573 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000139 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 08-11-2022 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 337 lm | |
| LED Flux=711lm LED Power=6W Eff=47% EfcLed=115lm/W EfcLum=40lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h | | | | | | | |
| C.I.E. | 97 99 100 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | -- | | | B NBN | BZ 1 | | |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 0.23 | 0.45 | 0.68 | 0.91 | 1.14 | OC | 0.23 | 0.45 | 0.68 | 0.91 | 1.14 |
| OB | 0.23 | 0.45 | 0.68 | 0.91 | 1.14 | OD | 0.23 | 0.45 | 0.68 | 0.91 | 1.14 |

| | | | | | | | | | | |
|----|--------------------------------|---------|--------|--------|-------|------|------|------|------|------|
| | Luminous Intensities [cd/klm] | | | | | | | | | |
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 1286.63 | 1152.05 | 507.50 | 137.91 | 30.44 | 7.17 | 2.37 | 1.31 | 0.66 | 0.18 |
| OB | 1286.63 | 1152.05 | 507.50 | 137.91 | 30.44 | 7.17 | 2.37 | 1.31 | 0.66 | 0.18 |
| OC | 1286.63 | 1152.05 | 507.50 | 137.91 | 30.44 | 7.17 | 2.37 | 1.31 | 0.66 | 0.18 |
| OD | 1286.63 | 1152.05 | 507.50 | 137.91 | 30.44 | 7.17 | 2.37 | 1.31 | 0.66 | 0.18 |

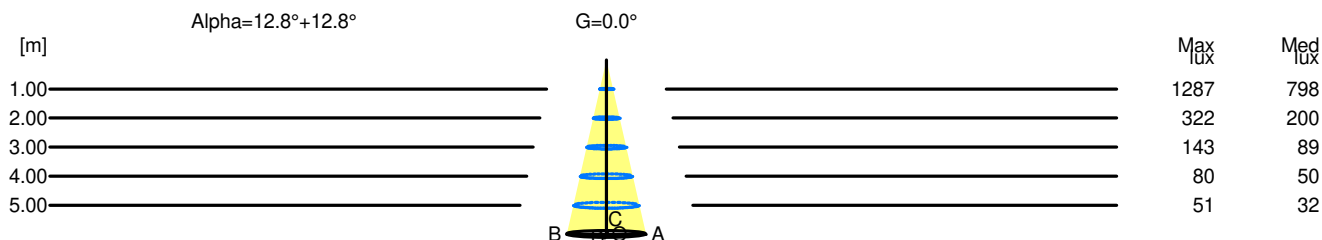

| H[m] | D[m] | Max lux | Med lux | Alpha=12.8°+12.8° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.45 | 1287 | 798 | | |
| 2.00 | 0.91 | 322 | 200 | | |
| 3.00 | 1.36 | 143 | 89 | | |
| 4.00 | 1.82 | 80 | 50 | | |
| 5.00 | 2.27 | 51 | 32 | | |