

## Luminaire


Code KZ63204+AP90400  
Name kata metron pst pnd 2x40 Dali 940 WF nro + Anti-Duzzle Louvre

## Measurem.

Code FTS2400465  
Name kata metron pst pnd 2x40 Dali 940 WF nro + Anti-Duzzle Louvre

Luminaire Flux	328 lm	Luminaire Power	9.5 W	Efficacy	34.526 lm/W	Efficiency	100.00%
Source Flux	328 lm	Maximum value	4238.65 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	40 mm 33 mm	Width Height	40 mm 0 mm	Height	103 mm
Horizontal Luminous Area		0.000855 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000207 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		328 lm	
LED Flux=929lm LED Power=8W Eff=35% EfcLed=118lm/W EfcLum=35lm/W CCT=4000K Ra=90 R9=50 SDCM=2 L70(9k)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1


40mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %

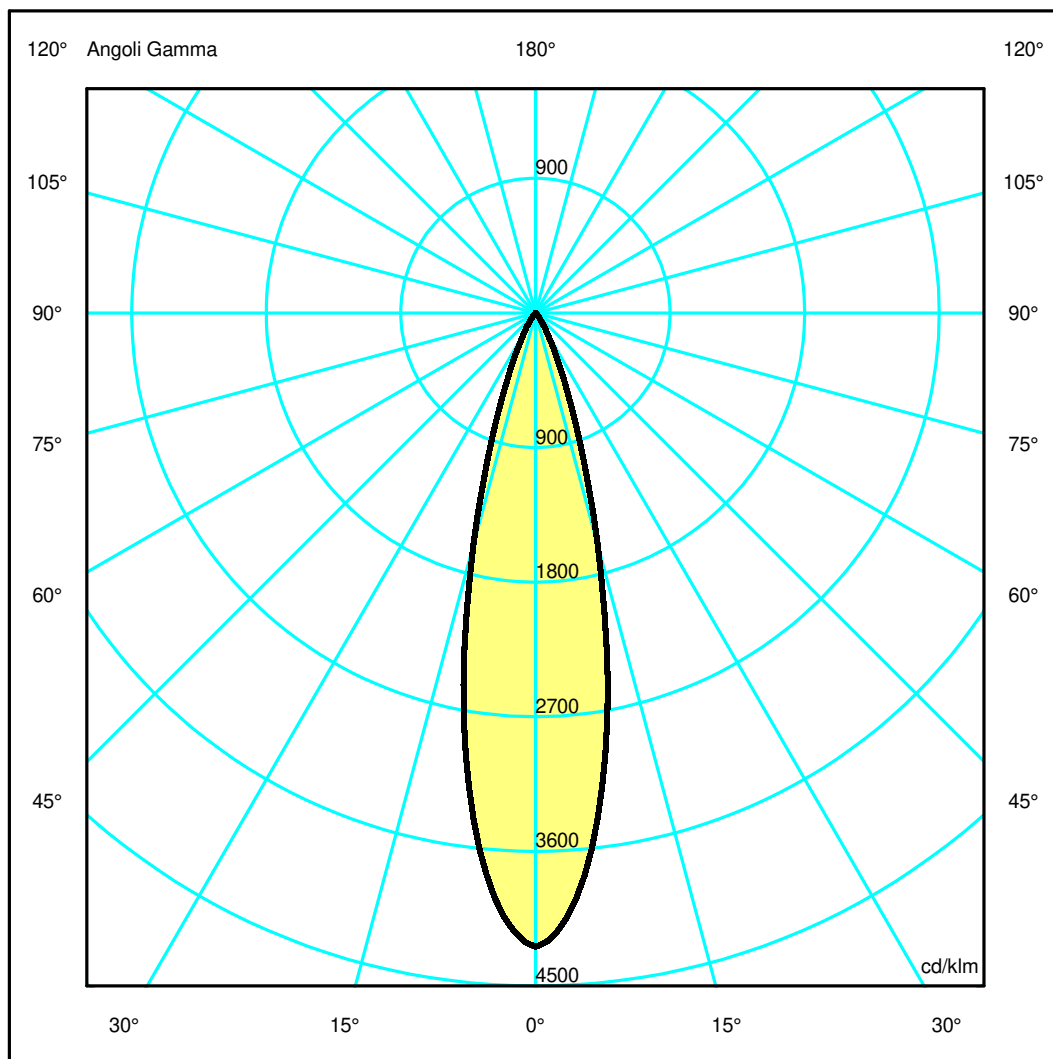

## Luminaire

Code KZ63204+AP90400

Name kata metron pst pnd 2x40 Dali 940 WF nro + Anti-Duzzle Louvre

## Measurem.

Code FTS2400465


Name kata metron pst pnd 2x40 Dali 940 WF nro + Anti-Duzzle Louvre

Luminaire Flux	328 lm	Luminaire Power	9.5 W	Efficacy	34.526 lm/W	Efficiency	100.00%
Source Flux	328 lm	Maximum value	4238.65 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	40 mm 33 mm	Width Height	40 mm 0 mm	Height	103 mm
Horizontal Luminous Area		0.000855 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000207 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		328 lm	
LED Flux=929lm LED Power=8W Eff=35% EfcLed=118lm/W EfcLum=35lm/W CCT=4000K Ra=90 R9=50 SDCM=2 L70(9k)=50000h							
C.I.E. F UTE	99 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.23	0.45	0.68	0.90	1.13	OC	0.23	0.45	0.68	0.90	1.13
OB	0.23	0.45	0.68	0.90	1.13	OD	0.23	0.45	0.68	0.90	1.13

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1390.28	1236.69	525.28	116.37	22.11	4.46	0.89	0.34	0.00	0.00
OB	1390.28	1236.69	525.28	116.37	22.11	4.46	0.89	0.34	0.00	0.00
OC	1390.28	1236.69	525.28	116.37	22.11	4.46	0.89	0.34	0.00	0.00
OD	1390.28	1236.69	525.28	116.37	22.11	4.46	0.89	0.34	0.00	0.00

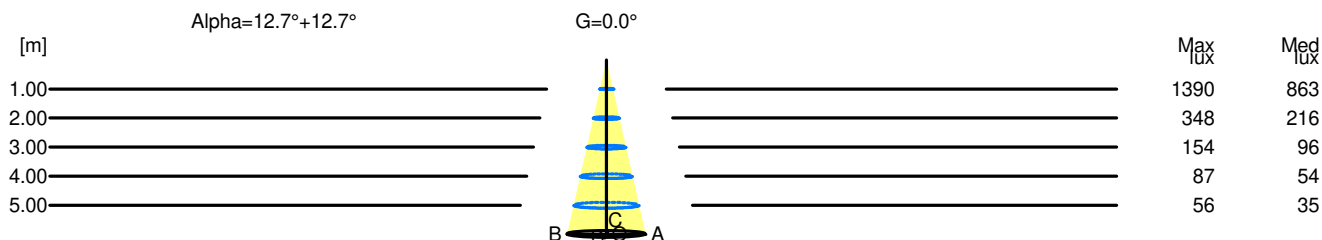

H[m]	D[m]	Max lux	Med lux	Alpha=12.7°+12.7°	G=0.0
1.00	0.45	1390	863		
2.00	0.90	348	216		
3.00	1.35	154	96		
4.00	1.80	87	54		
5.00	2.25	56	35		