

Luminaire

Code CH53104
Name SYLT HELGOLAND 90 3000K WF NRO

Measurem.

Code FTS2400513
Name SYLT HELGOLAND 90 3000K WF NRO

| | | | | | | | |
|--|--------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 893 lm | Luminaire Power | 6.0 W | Efficacy | 148.833 lm/W | Efficiency | 100.00% |
| Source Flux | 893 lm | Maximum value | 2351.60 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 90 mm | Height | 12 mm | | |
| Round Luminous Area | | Diam. | 64 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.003217 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000778 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 03-12-2024 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 893 lm | |
| LED Flux=1081lm LED Power=6W Eff=83% EfcLed=180lm/W EfcLum=149lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h | | | | | | | |
| C.I.E. | 99 | 100 | 100 | 100 | 100 | D DIN 5040 | A60 |
| F UTE | -- | | | | | B NBN | BZ 1 |


Diam=90mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

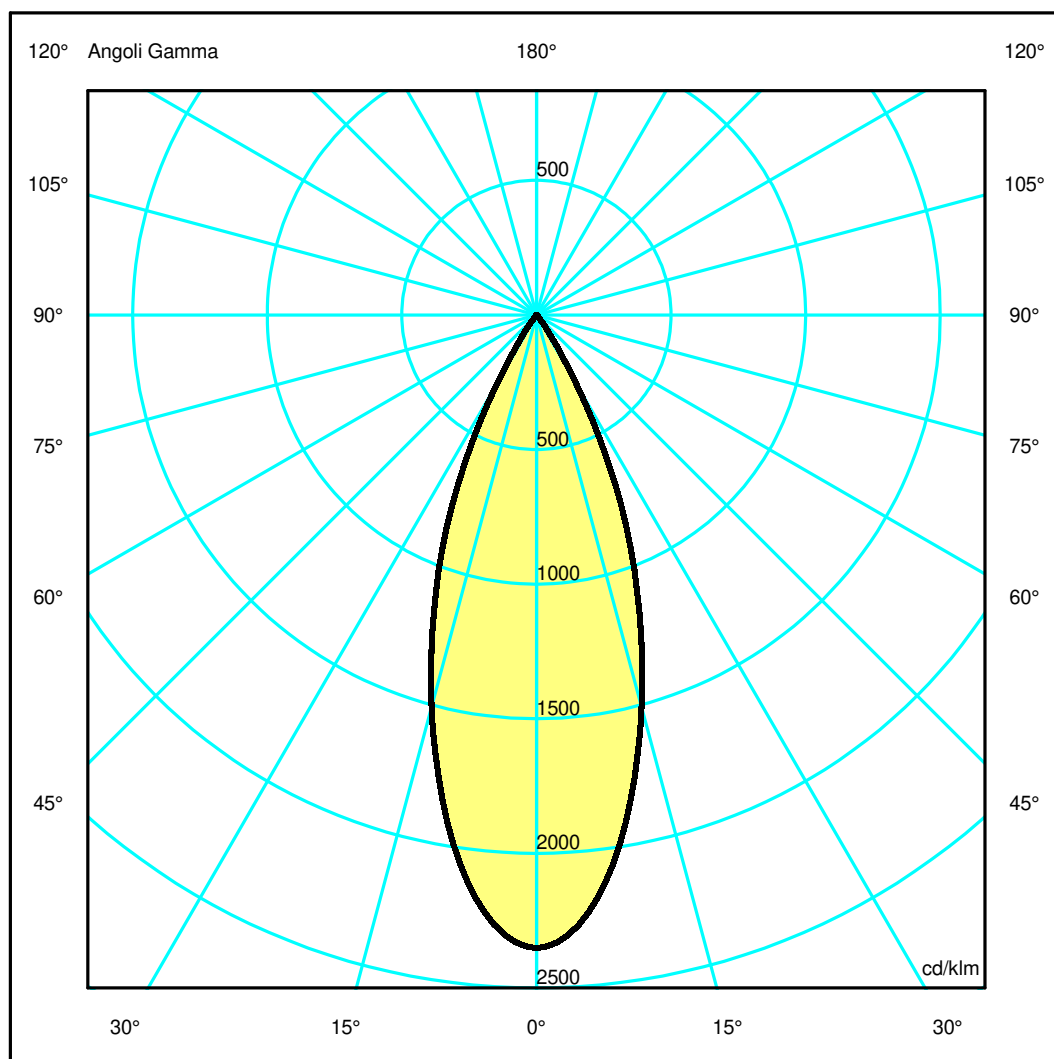

Luminaire

Code CH53104
Name SYLT HELGOLAND 90 3000K WF NRO

Measurem.


Code FTS2400513
Name SYLT HELGOLAND 90 3000K WF NRO

| | | | | | | | |
|--|--------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 893 lm | Luminaire Power | 6.0 W | Efficacy | 148.833 lm/W | Efficiency | 100.00% |
| Source Flux | 893 lm | Maximum value | 2351.60 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 90 mm | Height | 12 mm | | |
| Round Luminous Area | | Diam. | 64 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.003217 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000778 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 03-12-2024 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 893 lm | |
| LED Flux=1081lm LED Power=6W Eff=83% EfcLed=180lm/W EfcLum=149lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h | | | | | | | |
| C.I.E. | 99 | 100 | 100 | 100 | 100 | D DIN 5040 | A60 |
| F UTE | -- | | | | | B NBN | BZ 1 |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 0.34 | 0.69 | 1.03 | 1.38 | 1.72 | OC | 0.34 | 0.69 | 1.03 | 1.38 | 1.72 |
| OB | 0.34 | 0.69 | 1.03 | 1.38 | 1.72 | OD | 0.34 | 0.69 | 1.03 | 1.38 | 1.72 |

| | | | | | | | | | | |
|----|--------------------------------|---------|---------|--------|-------|------|------|------|------|------|
| | Luminous Intensities [cd/klm] | | | | | | | | | |
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 2099.98 | 1988.17 | 1345.14 | 614.40 | 70.17 | 7.43 | 3.63 | 1.92 | 0.75 | 0.24 |
| OB | 2099.98 | 1988.17 | 1345.14 | 614.40 | 70.17 | 7.43 | 3.63 | 1.92 | 0.75 | 0.24 |
| OC | 2099.98 | 1988.17 | 1345.14 | 614.40 | 70.17 | 7.43 | 3.63 | 1.92 | 0.75 | 0.24 |
| OD | 2099.98 | 1988.17 | 1345.14 | 614.40 | 70.17 | 7.43 | 3.63 | 1.92 | 0.75 | 0.24 |

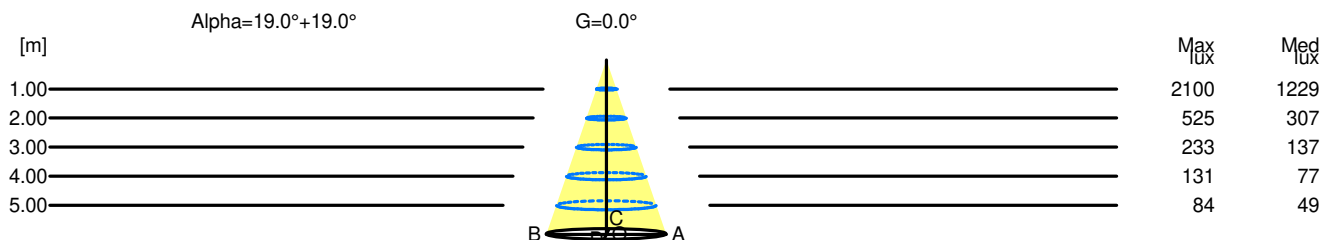

| H[m] | D[m] | Max lux | Med lux | Alpha=19.0°+19.0° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.69 | 2100 | 1229 | | |
| 2.00 | 1.38 | 525 | 307 | | |
| 3.00 | 2.06 | 233 | 137 | | |
| 4.00 | 2.75 | 131 | 77 | | |
| 5.00 | 3.44 | 84 | 49 | | |