

Luminaire


Code 1001010A
Name VEA F FOCUS PLATINUM GREY

Measurement

Code FTS2600184
Name VEA F FOCUS PLATINUM GREY

Luminaire Flux	758 lm	Luminaire Power	13.0 W	Efficacy	58.308 lm/W	Efficiency	100.00%
Source Flux	758 lm	Maximum value	1257.32 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	170 mm	Height	162 mm		
Round Luminous Area		Diam.	100 mm	Height	0 mm		
Horizontal Luminous Area		0.007854 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001900 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-04-2026		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		758 lm	
LED Flux=1423lm LED Power=9.27W Eff=53.3% EfcLed=153lm/W EfcLum=58.3lm/W CCT=3000K Ra=90 R9=45 SDCM=2 L70(12k)>66000h							
C.I.E.	97 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Diam=170mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

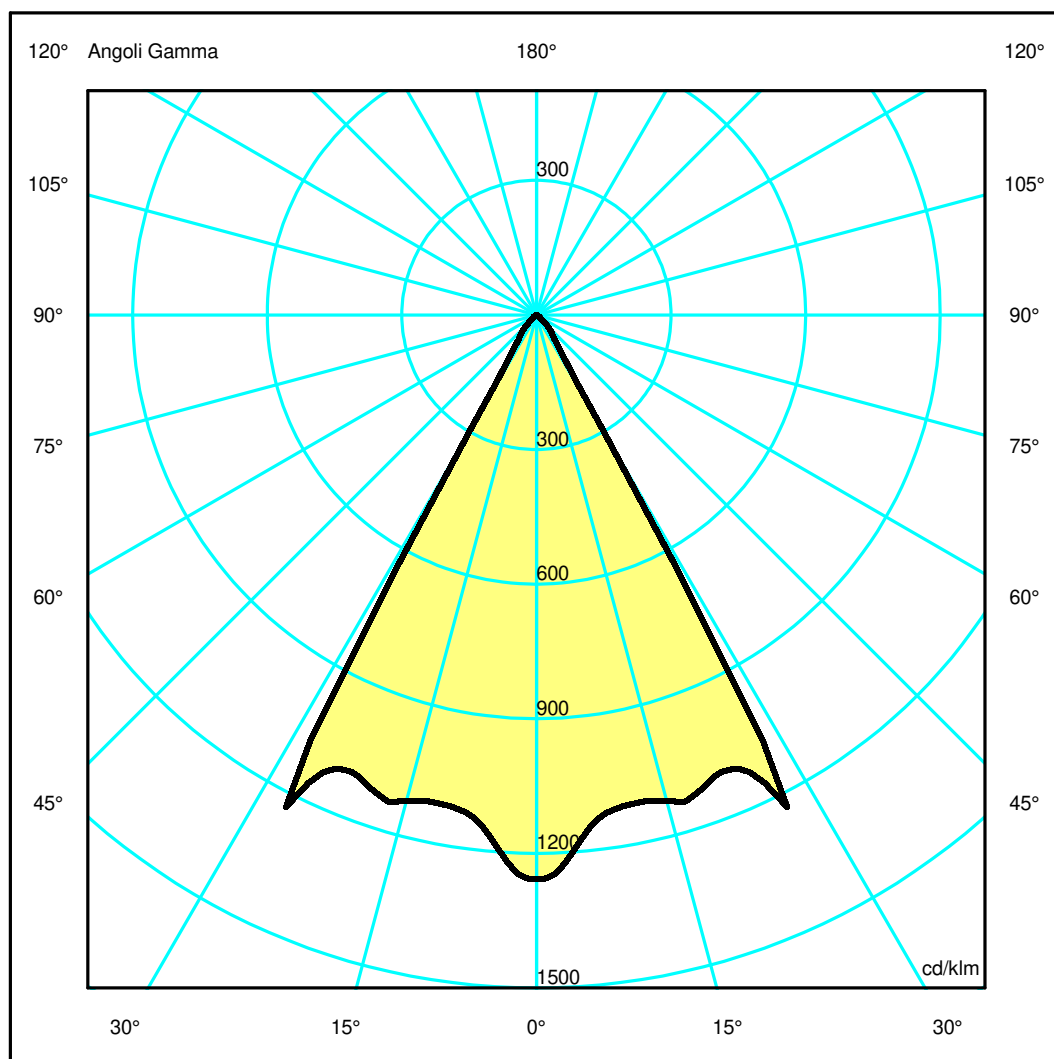

Luminaire

Code 1001010A
Name VEA F FOCUS PLATINUM GREY

Measur.


Code FTS2600184
Name VEA F FOCUS PLATINUM GREY

Luminaire Flux	758 lm	Luminaire Power	13.0 W	Efficacy	58.308 lm/W	Efficiency	100.00%
Source Flux	758 lm	Maximum value	1257.32 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Round Luminaire		Diam.	170 mm	Height	162 mm		
Round Luminous Area		Diam.	100 mm	Height	0 mm		
Horizontal Luminous Area		0.007854 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001900 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-04-2026		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		758 lm	
LED Flux=1423lm LED Power=9.27W Eff=53.3% EfcLed=153lm/W EfcLum=58.3lm/W CCT=3000K Ra=90 R9=45 SDCM=2 L70(12k)>66000h							
C.I.E.	97 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.56	1.11	1.67	2.22	2.78	OC	0.56	1.11	1.67	2.22	2.78
OB	0.56	1.11	1.67	2.22	2.78	OD	0.56	1.11	1.67	2.22	2.78

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	953.05	886.24	849.38	851.82	60.08	25.03	7.04	2.68	1.18	0.45
OB	953.05	886.24	849.38	851.82	60.08	25.03	7.04	2.68	1.18	0.45
OC	953.05	886.24	849.38	851.82	60.08	25.03	7.04	2.68	1.18	0.45
OD	953.05	886.24	849.38	851.82	60.08	25.03	7.04	2.68	1.18	0.45

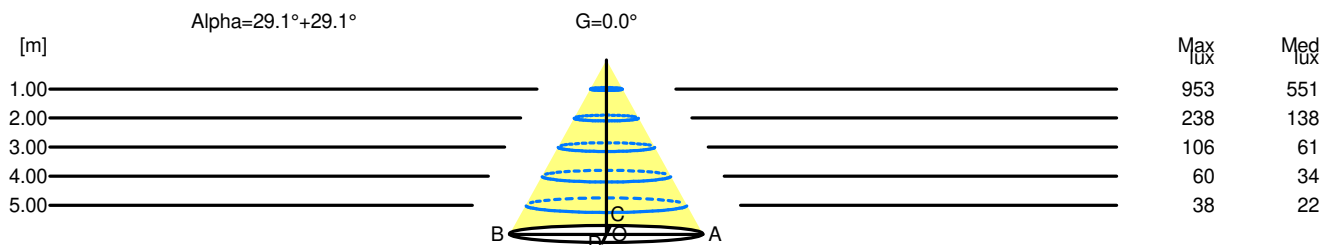

H[m]	D[m]	Max lux	Med lux	Alpha=29.1°+29.1°	G=0.0
1.00	1.11	953	551		
2.00	2.22	238	138		
3.00	3.33	106	61		
4.00	4.44	60	34		
5.00	5.56	38	22		