


## Luminaire

Code 2045W10A  
Name ALAMBICCO VERTICAL 3 VETRI 2700

## Measurem.

Code FTS2600001  
Name ALAMBICCO VERTICAL 3 VETRI 2700

|   |                 |                 |               |                             |                  |              |              |
|---|-----------------|-----------------|---------------|-----------------------------|------------------|--------------|--------------|
| Luminaire Flux  | 2293 lm         | Luminaire Power | 28.0 W        | Efficacy                    | 81.893 lm/W      | Efficiency   | 100.00%      |
| Source Flux   | 2293 lm         | Maximum value   | 121.08 cd/klm | Position                    | C=300.00 G=88.00 | CG           | Asymmetrical |
| Round Luminaire   |                 | Diam.           | 290 mm        | Height                      | 1027 mm          |              |              |
| Round Luminous Area   |                 | Diam.           | 190 mm        | Height                      | 642 mm           |              |              |
| Horizontal Luminous Area  |                 | 0.028353 m2     |               | Emitting area on Plane 180° |                  | 0.121980 m2  |              |
| Emitting area on Plane 0°   |                 | 0.121980 m2     |               | Emitting area on Plane 270° |                  | 0.121980 m2  |              |
| Emitting area on Plane 90°  |                 | 0.121980 m2     |               | Glare area at 76°           |                  | 0.125216 m2  |              |
| Coordinate system   |                 | CG              |               | Symmetry Type               |                  | Asymmetrical |              |
| Date  |                 | 15-07-2025      |               | Maximum Gamma Angle         |                  | 180          |              |
| Measurement Distance  |                 | 0.00            |               | Measurement Flux            |                  | 2293 lm      |              |
| LED Flux=2492lm LED Power=25,2W Eff=92% EfcLed=98,9lm/W EfcLum=81,9lm/W CCT=2700K Ra=90 SDCM=2 L70(6k)>36000h |                 |                 |               |                             |                  |              |              |
| C.I.E.  | 15 40 69 54 100 |                 |               | D DIN 5040                  |                  | C11          |              |
| F UTE   | --              |                 |               | B NBN                       |                  | BZ 10        |              |

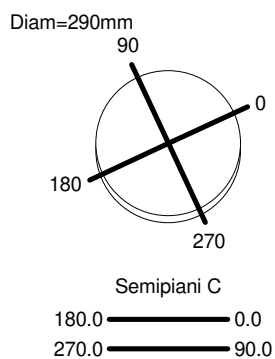

ULOR 45.95 %  
DLOR 54.05 %  
RN 45.95 %

