

## Luminaire

Code AX12511  
Name HELGOLAND 120 ADJ 4000K FL BCO/BCO

## Measurem.

Code FTS2600022  
Name HELGOLAND 120 ADJ 4000K FL BCO/BCO

Luminaire Flux	1248 lm	Luminaire Power	8.5 W	Efficacy	146.824 lm/W	Efficiency	100.00%
Source Flux	1248 lm	Maximum value	2961.35 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	120 mm	Height	12 mm		
Round Luminous Area		Diam.	89 mm	Height	0 mm		
Horizontal Luminous Area		0.006221 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001505 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1248 lm	
LED Flux=1546lm LED Power=8.5W Eff=81% EfcLed=182lm/W EfcLum=147lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	88 96 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=120mm



Semipiani C

180.0 — 0.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %

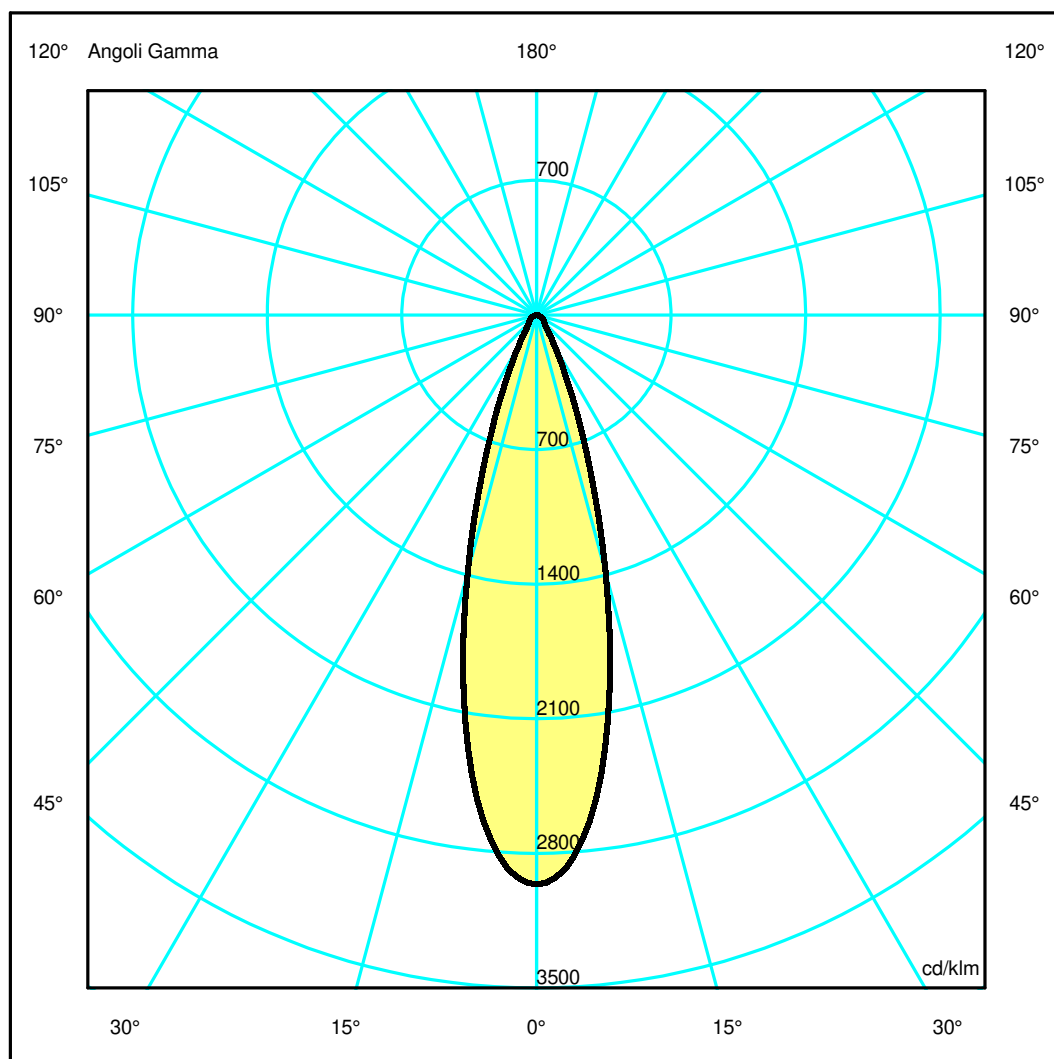

## Luminaire

Code AX12511  
Name HELGOLAND 120 ADJ 4000K FL BCO/BCO

## Measurerm.


Code FTS2600022  
Name HELGOLAND 120 ADJ 4000K FL BCO/BCO

Luminaire Flux	1248 lm	Luminaire Power	8.5 W	Efficacy	146.824 lm/W	Efficiency	100.00%
Source Flux	1248 lm	Maximum value	2961.35 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	120 mm	Height	12 mm		
Round Luminous Area		Diam.	89 mm	Height	0 mm		
Horizontal Luminous Area		0.006221 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001505 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1248 lm	
LED Flux=1546lm LED Power=8.5W Eff=81% EfcLed=182lm/W EfcLum=147lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	88 96 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.26	0.51	0.77	1.02	1.28	OC	0.26	0.51	0.77	1.02	1.28
OB	0.26	0.51	0.77	1.02	1.28	OD	0.26	0.51	0.77	1.02	1.28

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3695.77	3418.87	1730.34	477.98	134.56	70.73	53.49	32.88	15.39	3.64
OB	3695.77	3418.87	1730.34	477.98	134.56	70.73	53.49	32.88	15.39	3.64
OC	3695.77	3418.87	1730.34	477.98	134.56	70.73	53.49	32.88	15.39	3.64
OD	3695.77	3418.87	1730.34	477.98	134.56	70.73	53.49	32.88	15.39	3.64

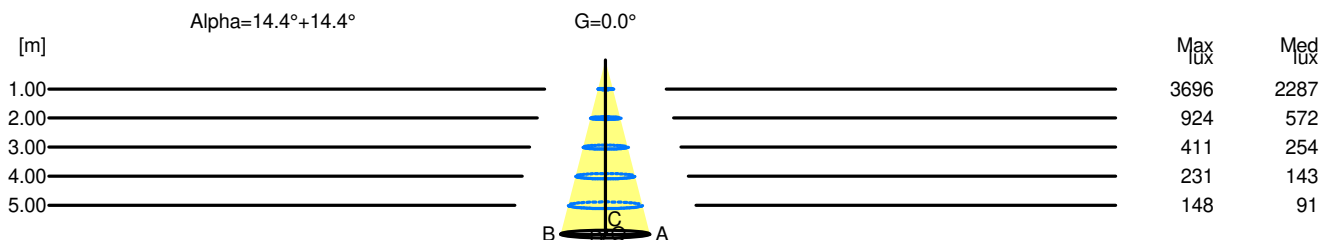

H[m]	D[m]	Max lux	Med lux	Alpha=14.4°+14.4°	G=0.0
1.00	0.51	3696	2287		
2.00	1.02	924	572		
3.00	1.54	411	254		
4.00	2.05	231	143		
5.00	2.56	148	91		