

## Luminaire

Code M249231  
Name TAGORA 570 SOSPENSIONE LED EMISSIONE DIRETTA DIMMERABILE DALI 3000K NERO/BLU

## Measurem.

Code FTS2200122-A  
Name TAGORA 570 SOSPENSIONE LED EMISSIONE DIRETTA DIMMERABILE DALI 3000K NERO/BLU

Luminaire Flux	3141 lm	Luminaire Power	54.0 W	Efficacy	58.167 lm/W	Efficiency	100.00%
Source Flux	3141 lm	Maximum value	420.08 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	570 mm	Height	195 mm		
Round Luminous Area		Diam.	475 mm	Height	0 mm		
Horizontal Luminous Area		0.177205 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.042870 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-05-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3141 lm	
LED Flux=7954lm LED Power=50W Eff=39% EfcLed=160lm/W EfcLum=58lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(11k)=69000h							
C.I.E.	55 88 99 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 3		


Diam=570mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %

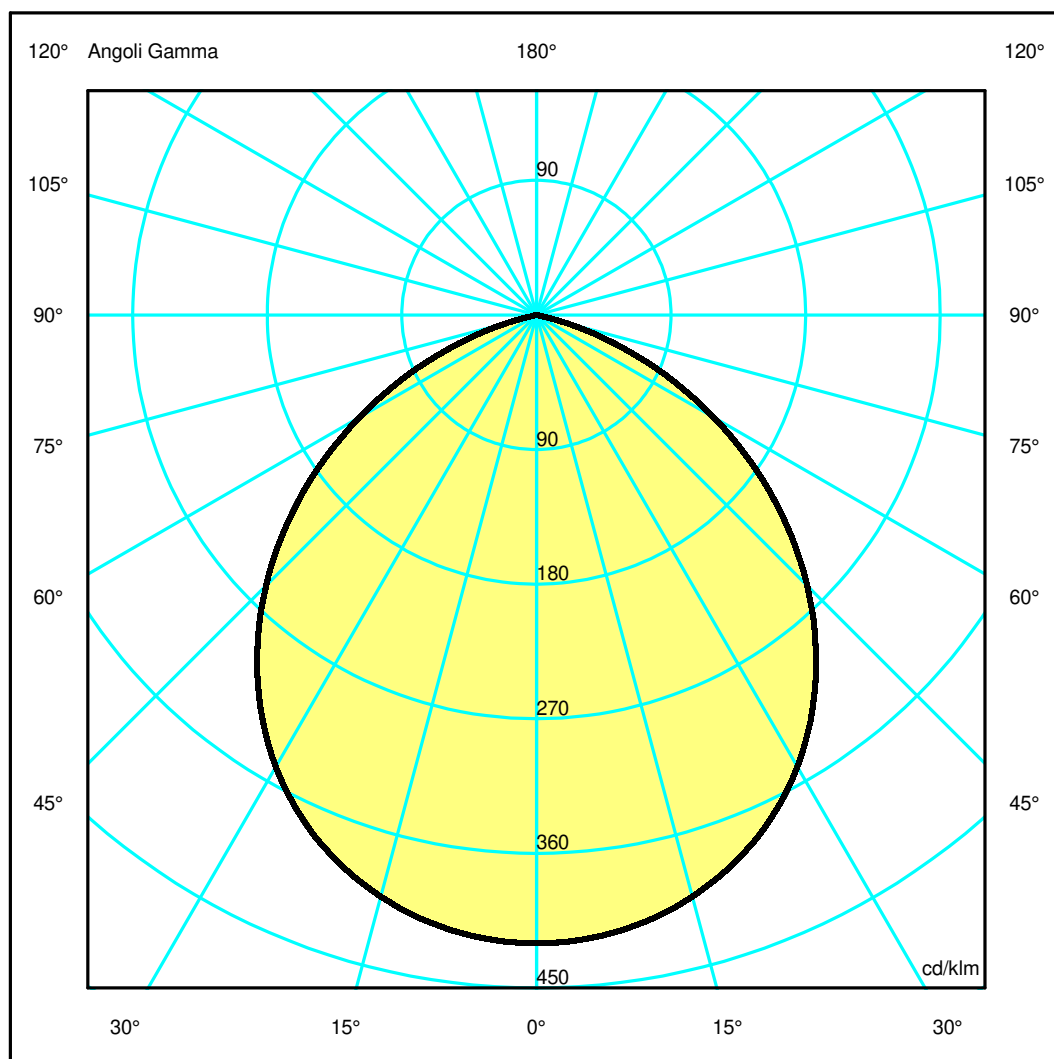

## Luminaire

Code M249231  
Name TAGORA 570 SOSPENSIONE LED EMISSIONE DIRETTA DIMMERABILE DALI 3000K NERO/BLU

## Measurem.


Code FTS2200122-A  
Name TAGORA 570 SOSPENSIONE LED EMISSIONE DIRETTA DIMMERABILE DALI 3000K NERO/BLU

Luminaire Flux	3141 lm	Luminaire Power	54.0 W	Efficacy	58.167 lm/W	Efficiency	100.00%
Source Flux	3141 lm	Maximum value	420.08 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Round Luminaire		Diam.	570 mm	Height	195 mm		
Round Luminous Area		Diam.	475 mm	Height	0 mm		
Horizontal Luminous Area		0.177205 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.042870 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-05-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3141 lm	
LED Flux=7954lm LED Power=50W Eff=39% EfcLed=160lm/W EfcLum=58lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(11k)=69000h							
C.I.E.	55 88 99 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 3		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.24	2.47	3.71	4.94	6.18	OC	1.24	2.47	3.71	4.94	6.18
OB	1.24	2.47	3.71	4.94	6.18	OD	1.24	2.47	3.71	4.94	6.18

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1319.46	1313.23	1264.75	1165.50	1010.47	803.83	559.49	299.66	62.51	2.91
OB	1319.46	1313.23	1264.75	1165.50	1010.47	803.83	559.49	299.66	62.51	2.91
OC	1319.46	1313.23	1264.75	1165.50	1010.47	803.83	559.49	299.66	62.51	2.91
OD	1319.46	1313.23	1264.75	1165.50	1010.47	803.83	559.49	299.66	62.51	2.91

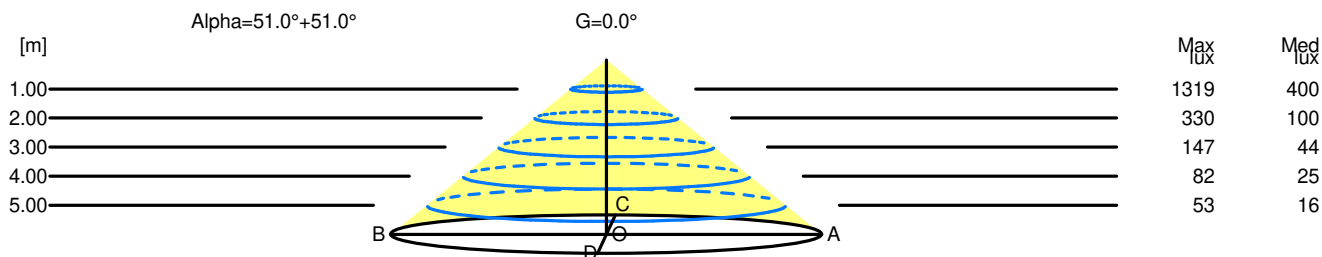

H[m]	D[m]	Max lux	Med lux	Alpha=51.0°+51.0°	G=0.0
1.00	2.47	1319	400		
2.00	4.94	330	100		
3.00	7.42	147	44		
4.00	9.89	82	25		
5.00	12.36	53	16		