

Luminaire


Code FW00001
Name DIFFUSED LINEAR 600 FUNIVIA 927 BCO

Measurem.

Code FTS2300039-B
Name DIFFUSED LINEAR 600 FUNIVIA 927 BCO

Luminaire Flux	1422 lm	Luminaire Power	13.0 W	Efficacy	109.385 lm/W	Efficiency	100.00%
Source Flux	1422 lm	Maximum value	347.31 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	600 mm	Width	20 mm	Height	20 mm
Rectangular Luminous Area		Length	588 mm	Width	18 mm	Height	0 mm
Horizontal Luminous Area		0.010584 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002561 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-01-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1422 lm	
LED Flux=2071lm LED Power=12W Eff=69% EfcLed=174lm/W EfcLum=109lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	47 78 95 100 100			D DIN 5040	A30		
F UTE	1.00 E			B NBN	BZ 5		

600mm x 20mm




Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 0.01 %

DLOR 99.99 %

RN 0.01 %

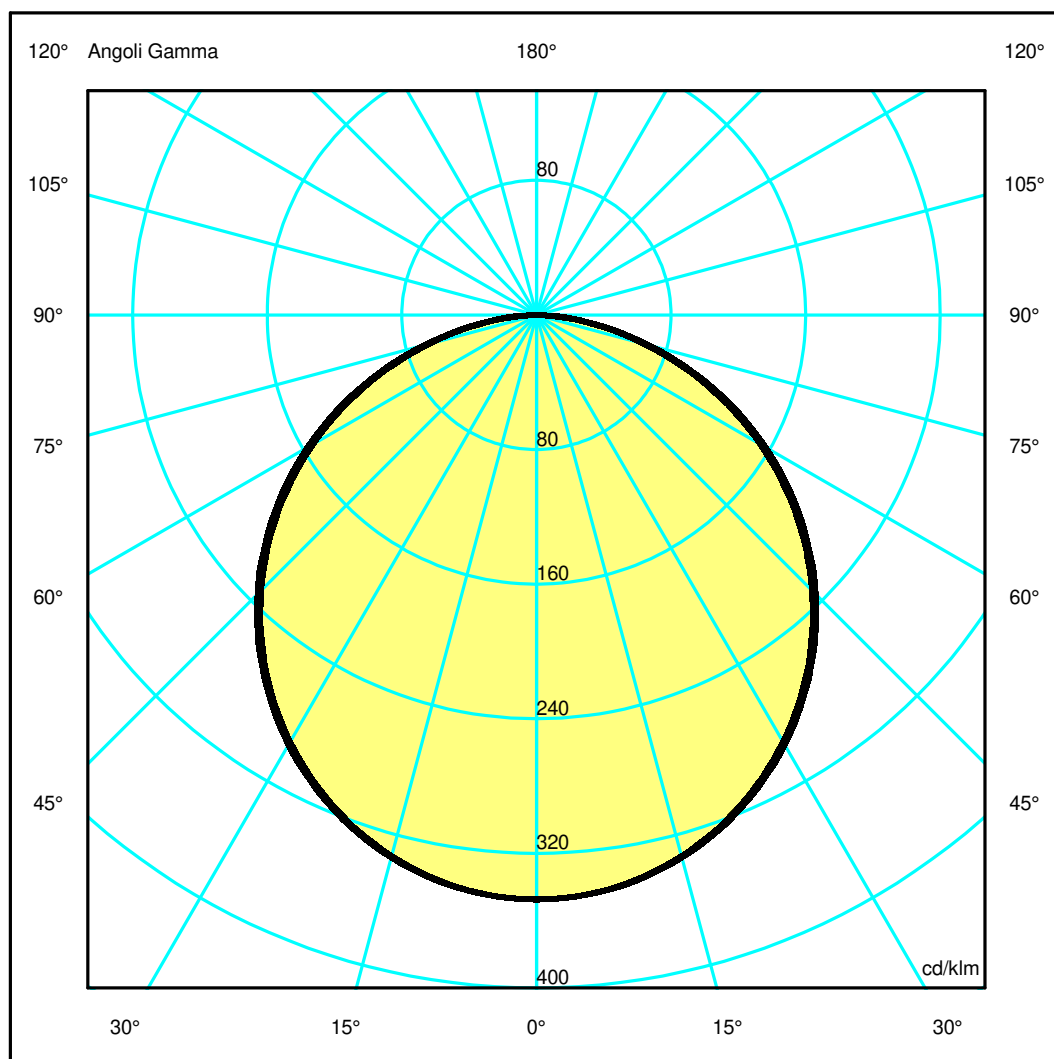

Luminaire

Code FW00001
Name DIFFUSED LINEAR 600 FUNIVIA 927 BCO

Measur.


Code FTS2300039-B
Name DIFFUSED LINEAR 600 FUNIVIA 927 BCO

Luminaire Flux	1422 lm	Luminaire Power	13.0 W	Efficacy	109.385 lm/W	Efficiency	100.00%
Source Flux	1422 lm	Maximum value	347.31 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	600 mm	Width	20 mm	Height	20 mm
Rectangular Luminous Area		Length	588 mm	Width	18 mm	Height	0 mm
Horizontal Luminous Area		0.010584 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002561 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-01-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1422 lm	
LED Flux=2071lm LED Power=12W Eff=69% EfcLed=174lm/W EfcLum=109lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	47 78 95 100 100			D DIN 5040	A30		
F UTE	1.00 E			B NBN	BZ 5		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.51	3.01	4.52	6.02	7.53	OC	1.54	3.08	4.62	6.16	7.70
OB	1.51	3.01	4.52	6.02	7.53	OD	1.54	3.08	4.62	6.16	7.70

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	493.88	491.60	473.49	439.09	390.76	329.58	257.07	178.39	94.72	23.28
OB	493.88	491.60	473.49	439.09	390.76	329.58	257.07	178.39	94.72	23.28
OC	493.88	491.66	474.47	441.60	393.59	333.45	262.59	182.41	97.09	25.64
OD	493.88	491.66	474.47	441.60	393.59	333.45	262.59	182.41	97.09	25.64

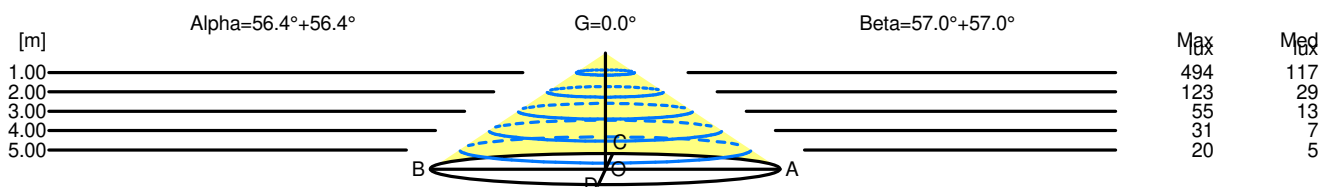

H[m]	D[m]	Max lux	Med lux	Alpha=56.4°+56.4°	G=0.0
1.00	3.01	494	117		
2.00	6.02	123	29		
3.00	9.03	55	13		
4.00	12.04	31	7		
5.00	15.05	20	5		

H[m]	D[m]	Max lux	Med lux	Beta=57.0°+57.0°	G=0.0
1.00	3.08	494	117		
2.00	6.16	123	29		
3.00	9.24	55	13		
4.00	12.32	31	7		
5.00	15.40	20	5		