

## Luminaire

Code KZ50204+AP90300  
Name kata metron pst spt 2x40 Dali 927 WF nro + Soft Filter

## Measurem.

Code FTS2400435  
Name kata metron pst spt 2x40 Dali 927 WF nro + Soft Filter

Luminaire Flux	373 lm	Luminaire Power	9.5 W	Efficacy	39.263 lm/W	Efficiency	100.00%
Source Flux	373 lm	Maximum value	3008.02 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	40 mm 33 mm	Width Height	40 mm 0 mm	Height	103 mm
Horizontal Luminous Area		0.000855 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000207 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		373 lm	
LED Flux=805lm LED Power=8W Eff=46% EfcLed=102lm/W EfcLum=39lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(9k)=50000h							
C.I.E.	96 99 100 100 100			D DIN 5040		A60	
F UTE	1.00 A			B NBN		BZ 1	


40mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %

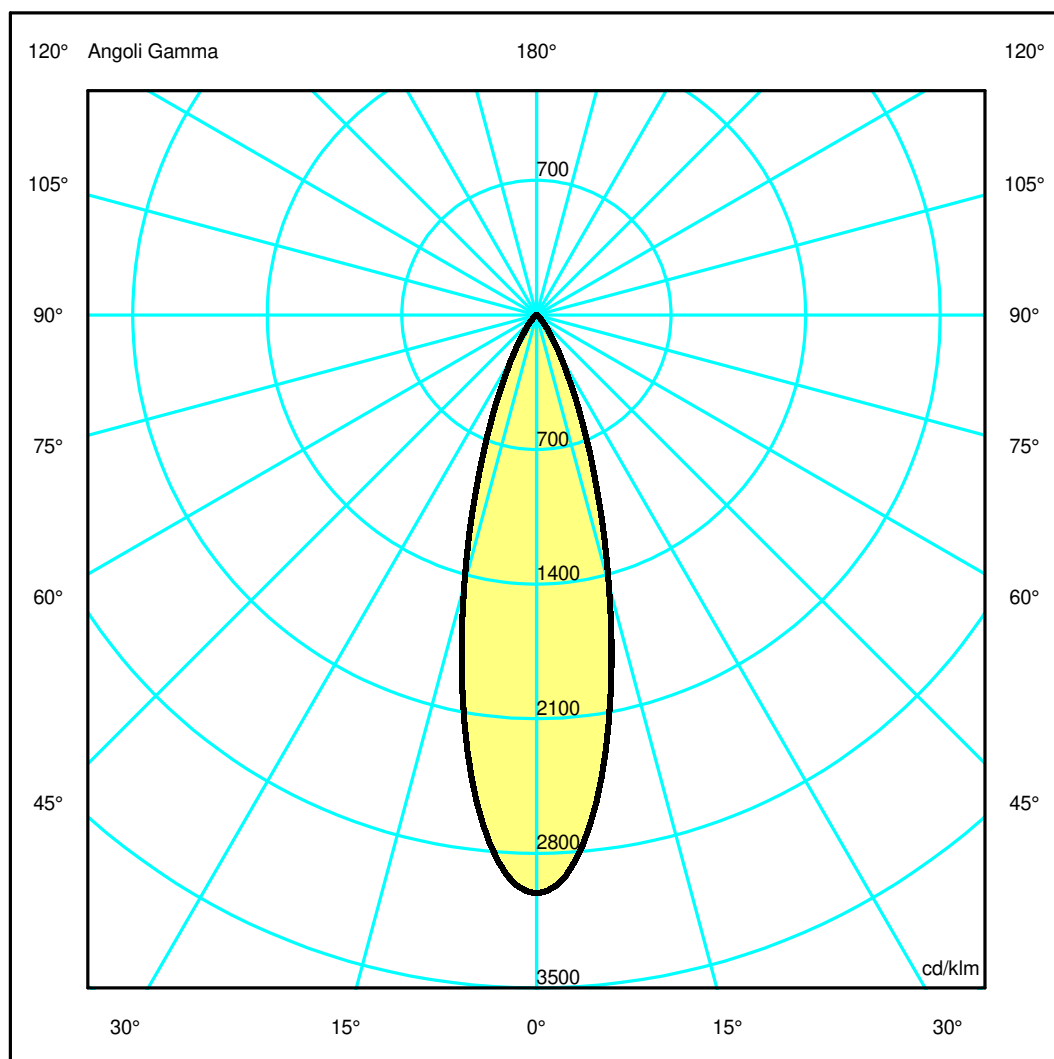

## Luminaire

Code KZ50204+AP90300  
Name kata metron pst spt 2x40 Dali 927 WF nro + Soft Filter

## Measurem.


Code FTS2400435  
Name kata metron pst spt 2x40 Dali 927 WF nro + Soft Filter

Luminaire Flux	373 lm	Luminaire Power	9.5 W	Efficacy	39.263 lm/W	Efficiency	100.00%
Source Flux	373 lm	Maximum value	3008.02 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	40 mm 33 mm	Width Height	40 mm 0 mm	Height	103 mm
Horizontal Luminous Area		0.000855 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000207 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		373 lm	
LED Flux=805lm LED Power=8W Eff=46% EfcLed=102lm/W EfcLum=39lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(9k)=50000h							
C.I.E. F UTE	96 99 100 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.26	0.52	0.78	1.04	1.31	OC	0.26	0.52	0.78	1.04	1.31
OB	0.26	0.52	0.78	1.04	1.31	OD	0.26	0.52	0.78	1.04	1.31

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1121.99	1031.08	542.38	179.00	48.61	13.02	3.86	1.65	0.72	0.08
OB	1121.99	1031.08	542.38	179.00	48.61	13.02	3.86	1.65	0.72	0.08
OC	1121.99	1031.08	542.38	179.00	48.61	13.02	3.86	1.65	0.72	0.08
OD	1121.99	1031.08	542.38	179.00	48.61	13.02	3.86	1.65	0.72	0.08

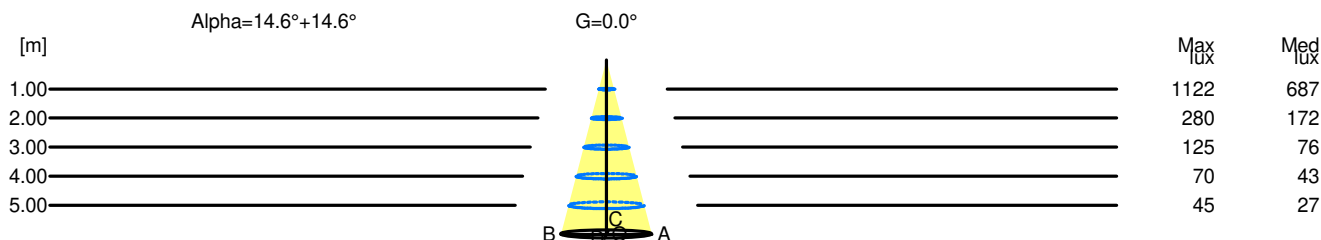

H[m]	D[m]	Max lux	Med lux	Alpha=14.6°+14.6°	G=0.0
1.00	0.52	1122	687		
2.00	1.04	280	172		
3.00	1.57	125	76		
4.00	2.09	70	43		
5.00	2.61	45	27		