

Luminaire

Code CK10001
Name HOY SPOT LENS 65 SMD 2700K SP DALI BCO

Measurem.

Code FTS2600123
Name HOY SPOT LENS 65 SMD 2700K SP DALI BCO

Luminaire Flux	1567 lm	Luminaire Power	15.5 W	Efficacy	101.097 lm/W	Efficiency	100.00%
Source Flux	1567 lm	Maximum value	6463.79 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	65 mm	Height	85 mm		
Round Luminous Area		Diam.	45 mm	Height	0 mm		
Horizontal Luminous Area		0.001590 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000385 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		24-03-2026		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1567 lm	
LED Flux=1944lm LED Power=14W Eff=81% EfcLed=142lm/W EfcLum=101lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(17k)=50000h							
C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Diam=65mm




Semipiani C

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

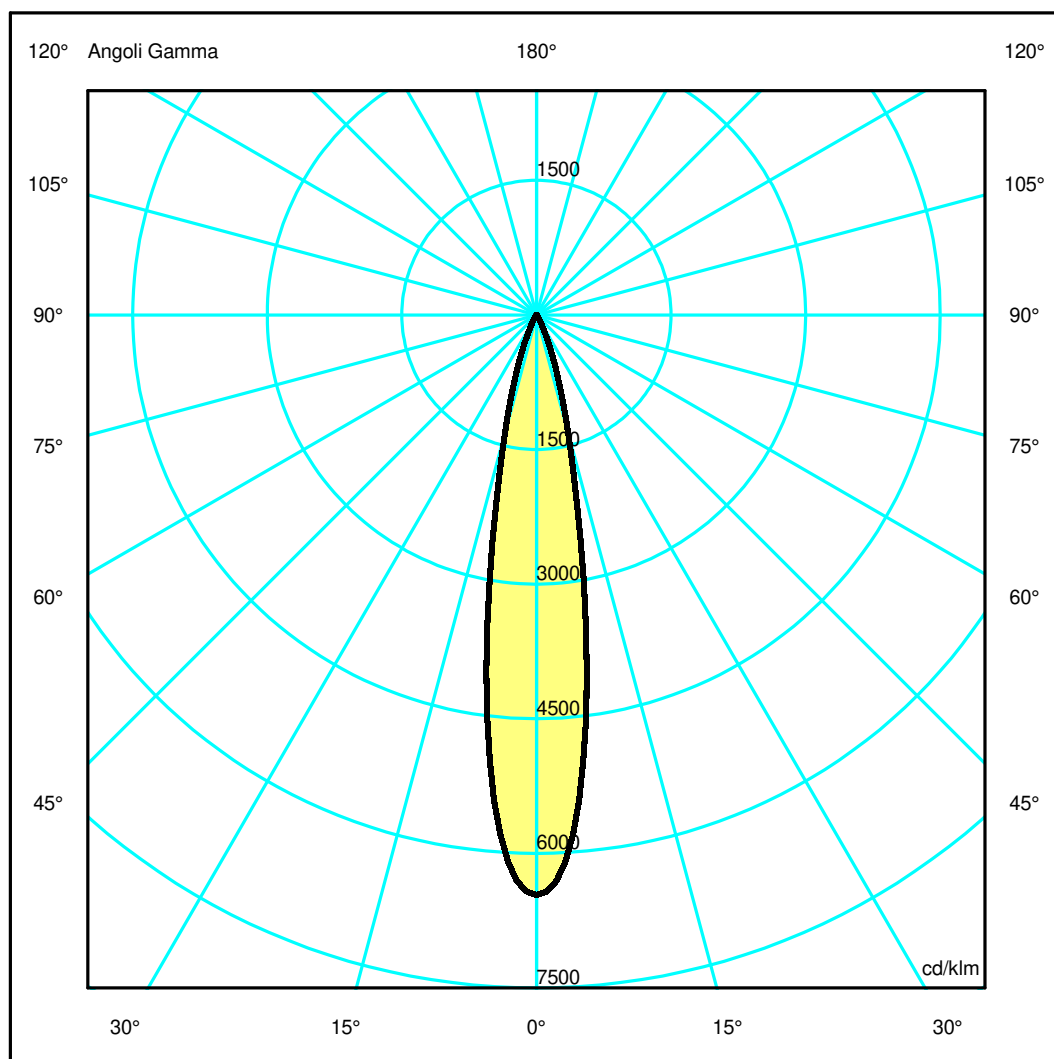

Luminaire

Code CK10001
Name HOY SPOT LENS 65 SMD 2700K SP DALI BCO

Measurem.


Code FTS2600123
Name HOY SPOT LENS 65 SMD 2700K SP DALI BCO

Luminaire Flux	1567 lm	Luminaire Power	15.5 W	Efficacy	101.097 lm/W	Efficiency	100.00%
Source Flux	1567 lm	Maximum value	6463.79 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	65 mm	Height	85 mm		
Round Luminous Area		Diam.	45 mm	Height	0 mm		
Horizontal Luminous Area		0.001590 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000385 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		24-03-2026		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1567 lm	
LED Flux=1944lm LED Power=14W Eff=81% EfcLed=142lm/W EfcLum=101lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(17k)=50000h							
C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.17	0.34	0.51	0.67	0.84	OC	0.17	0.34	0.51	0.67	0.84
OB	0.17	0.34	0.51	0.67	0.84	OD	0.17	0.34	0.51	0.67	0.84

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	10128.76	8508.36	2145.78	374.98	58.49	23.17	8.59	3.97	1.20	0.29
OB	10128.76	8508.36	2145.78	374.98	58.49	23.17	8.59	3.97	1.20	0.29
OC	10128.76	8508.36	2145.78	374.98	58.49	23.17	8.59	3.97	1.20	0.29
OD	10128.76	8508.36	2145.78	374.98	58.49	23.17	8.59	3.97	1.20	0.29

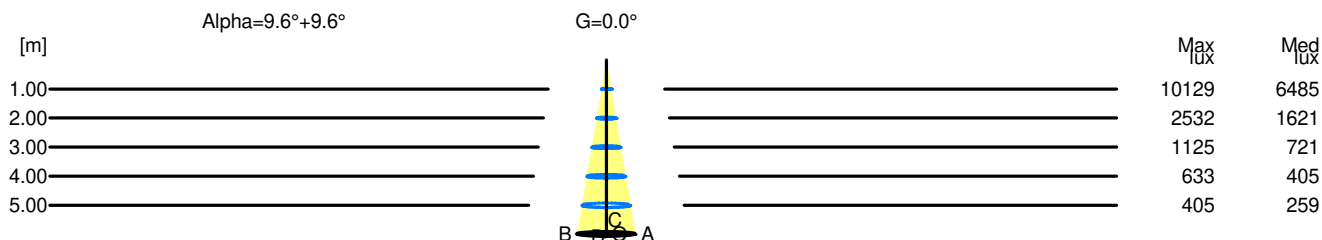

H[m]	D[m]	Max lux	Med lux	Alpha=9.6°+9.6°	G=0.0
1.00	0.34	10129	6485		
2.00	0.67	2532	1621		
3.00	1.01	1125	721		
4.00	1.35	633	405		
5.00	1.69	405	259		