

## Luminaire

Code AX00101  
Name HELGOLAND 60 FIX 4000K WF BCO

## Measurement

Code FTS2600017  
Name HELGOLAND 60 FIX 4000K WF BCO

Luminaire Flux	405 lm	Luminaire Power	2.6 W	Efficacy	155.769 lm/W	Efficiency	100.00%
Source Flux	405 lm	Maximum value	2335.45 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	60 mm	Height	12 mm		
Round Luminous Area		Diam.	37 mm	Height	0 mm		
Horizontal Luminous Area		0.001075 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.000260 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		405 lm	
LED Flux=456lm LED Power=2.6W Eff=89% EfcLed=175lm/W EfcLum=156lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	93 97 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Diam=60mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %



## Luminaire

Code AX00101  
Name HELGOLAND 60 FIX 4000K WF BCO

## Measurem.


Code FTS2600017  
Name HELGOLAND 60 FIX 4000K WF BCO

Luminaire Flux	405 lm	Luminaire Power	2.6 W	Efficacy	155.769 lm/W	Efficiency	100.00%
Source Flux	405 lm	Maximum value	2335.45 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Round Luminaire		Diam.	60 mm	Height	12 mm		
Round Luminous Area		Diam.	37 mm	Height	0 mm		
Horizontal Luminous Area		0.001075 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000260 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		405 lm	
LED Flux=456lm LED Power=2.6W Eff=89% EfcLed=175lm/W EfcLum=156lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	93 97 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.66	0.99	1.32	1.65	OC	0.33	0.66	0.99	1.32	1.65
OB	0.33	0.66	0.99	1.32	1.65	OD	0.33	0.66	0.99	1.32	1.65

	Luminous Intensities [ cd/klm ]										
	0	5	15	25	35	45	55	65	75	85	
OA	945.86	897.16	588.30	236.97	32.83	13.07	9.75	6.71	3.56	0.98	
OB	945.86	897.16	588.30	236.97	32.83	13.07	9.75	6.71	3.56	0.98	
OC	945.86	897.16	588.30	236.97	32.83	13.07	9.75	6.71	3.56	0.98	
OD	945.86	897.16	588.30	236.97	32.83	13.07	9.75	6.71	3.56	0.98	

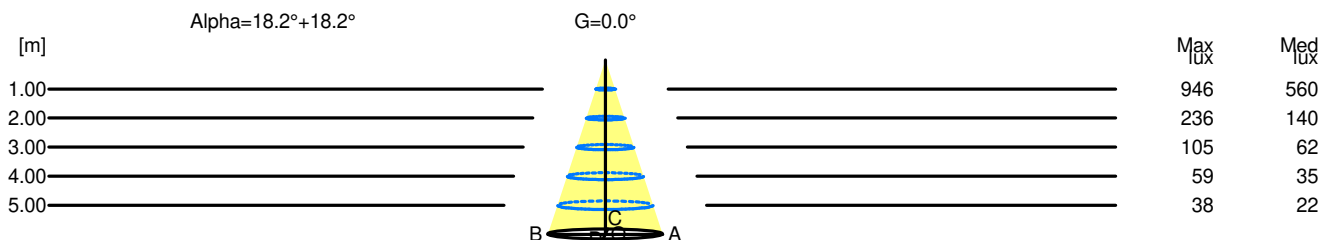

H[m]	D[m]	Max lux	Med lux	Alpha=18.2°+18.2°	G=0.0
1.00	0.66	946	560		
2.00	1.32	236	140		
3.00	1.98	105	62		
4.00	2.64	59	35		
5.00	3.30	38	22		