

## Luminaire


Code WW03122  
Name WALL WASHER TURN AROUND 600 4000K TIT.

## Measurem.

Code FTS2600119  
Name WALL WASHER TURN AROUND 600 4000K TIT.

Luminaire Flux	950 lm	Luminaire Power	11.0 W	Efficacy	86.364 lm/W	Efficiency	100.00%
Source Flux	950 lm	Maximum value	824.66 cd/klm	Position	C=180.00 G=14.00	CG Asymmetrical	
Rectangular Luminaire		Length	615 mm	Width	40 mm	Height	78 mm
Rectangular Luminous Area		Length	615 mm	Width	30 mm	Height	0 mm
Horizontal Luminous Area		0.018450 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.004463 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		02-03-2026		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		950 lm	
LED Flux=1578lm LED Power=10W Eff=60% EfcLed=158lm/W EfcLum=90lm/W CCT=4000K Ra=90 SDCM=3 L70(6k)=50000h							
C.I.E.	58 82 93 93 100			D DIN 5040	A41		
F UTE	0.93 D + 0.07 T			B NBN	BZ 3 / 1.25 / BZ 4		

615mm x 40mm




Semipiani C

180.0 — 0.0  
270.0 — 90.0

ULOR 7.02 %

DLOR 92.98 %

RN 7.02 %

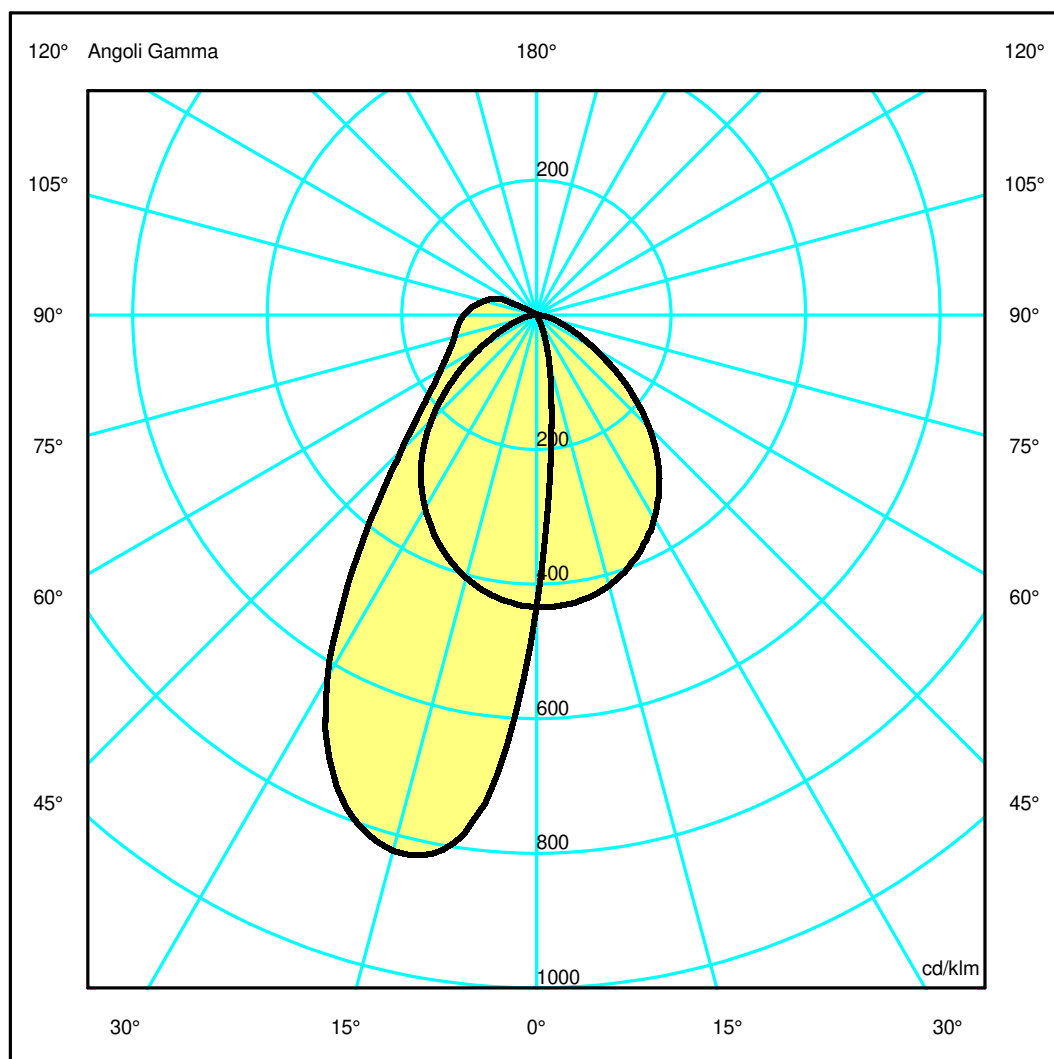

## Luminaire

Code WW03122  
Name WALL WASHER TURN AROUND 600 4000K TIT.

## Measur.


Code FTS2600119  
Name WALL WASHER TURN AROUND 600 4000K TIT.

Luminaire Flux	950 lm	Luminaire Power	11.0 W	Efficacy	86.364 lm/W	Efficiency	100.00%
Source Flux	950 lm	Maximum value	824.66 cd/klm	Position	C=180.00 G=14.00	CG Asymmetrical	
Rectangular Luminaire		Length	615 mm	Width	40 mm	Height	78 mm
Rectangular Luminous Area		Length	615 mm	Width	30 mm	Height	0 mm
Horizontal Luminous Area		0.018450 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.004463 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		02-03-2026		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		950 lm	
LED Flux=1578lm LED Power=10W Eff=60% EfcLed=158lm/W EfcLum=90lm/W CCT=4000K Ra=90 SDCM=3 L70(6k)=50000h							
C.I.E.	58 82 93 93 100			D DIN 5040	A41		
F UTE	0.93 D + 0.07 T			B NBN	BZ 3 / 1.25 / BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.26	0.51	0.77	1.03	1.29	OC	1.08	2.17	3.25	4.34	5.42
OB	0.53	1.07	1.60	2.14	2.67	OD	1.08	2.16	3.24	4.32	5.41

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	412.15	220.13	67.16	13.39	0.67	0.53	0.50	0.60	0.68	0.73
OB	412.15	655.13	782.91	691.50	465.11	270.25	180.38	140.29	119.91	109.05
OC	412.15	411.49	395.40	357.15	301.08	224.67	135.14	63.09	27.01	7.50
OD	412.15	407.33	384.22	342.35	283.90	210.52	127.09	59.94	25.63	6.68

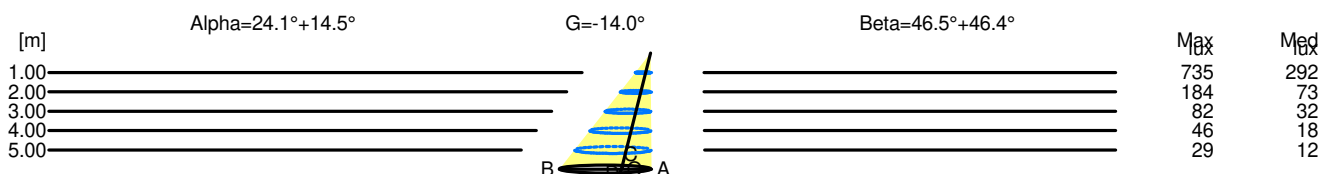

H[m]	D[m]	Max lux	Med lux	Alpha=24.1°+14.5°	G=-14.0	
1.00	0.79	735	292			
2.00	1.58	184	73			
3.00	2.38	82	32			
4.00	3.17	46	18			
5.00	3.96	29	12			

H[m]	D[m]	Max lux	Med lux	Beta=46.4°+46.5°	G=0.0	
1.00	2.17	735	292			
2.00	4.33	184	73			
3.00	6.50	82	32			
4.00	8.66	46	18			
5.00	10.83	29	12			