

Luminaire

Code 0039060A
Name NESSINO T BIANCO

Measurem.

Code FTS2600142
Name NESSINO T BIANCO

Luminaire Flux	1302 lm	Luminaire Power	17.1 W	Efficacy	76.255 lm/W	Efficiency	100.00%
Source Flux	1302 lm	Maximum value	188.37 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	320 mm	Height	220 mm		
Round Luminous Area		Diam.	320 mm	Height	90 mm		
Horizontal Luminous Area		0.080425 m ²		Emitting area on Plane 180°		0.028800 m ²	
Emitting area on Plane 0°		0.028800 m ²		Emitting area on Plane 270°		0.028800 m ²	
Emitting area on Plane 90°		0.028800 m ²		Glare area at 76°		0.047401 m ²	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		24-06-2026		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1302 lm	
4x Lampadina Life opalina LED E14 4W 3000K CRI80							
C.I.E.	32 65 90 86 100			D DIN 5040	B21		
F UTE	0.86 I + 0.14 T			B NBN	BZ 6		

Diam=320mm




Semipiani C

180.0 ——— 0.0

ULOR 13.95 %

DLOR 86.05 %

RN 13.95 %

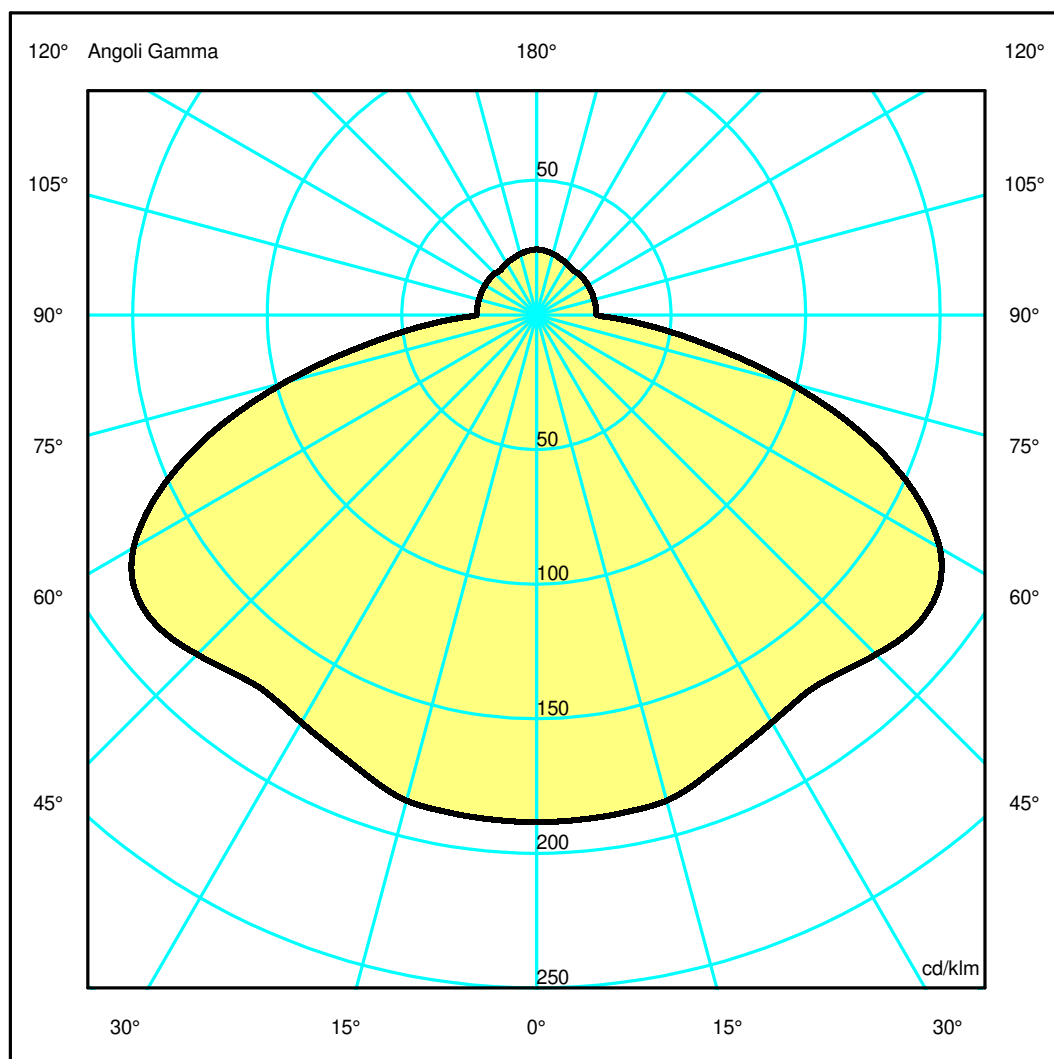

Luminaire

Code 0039060A
Name NESSINO T BIANCO

Measurem.


Code FTS2600142
Name NESSINO T BIANCO

Luminaire Flux	1302 lm	Luminaire Power	17.1 W	Efficacy	76.255 lm/W	Efficiency	100.00%
Source Flux	1302 lm	Maximum value	188.37 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	320 mm	Height	220 mm		
Round Luminous Area		Diam.	320 mm	Height	90 mm		
Horizontal Luminous Area		0.080425 m2		Emitting area on Plane 180°		0.028800 m2	
Emitting area on Plane 0°		0.028800 m2		Emitting area on Plane 270°		0.028800 m2	
Emitting area on Plane 90°		0.028800 m2		Glare area at 76°		0.047401 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		24-06-2026		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1302 lm	
4x Lampadina Life opalina LED E14 4W 3000K CRI80							
C.I.E.	32 65 90 86 100			D DIN 5040	B21		
F UTE	0.86 I + 0.14 T			B NBN	BZ 6		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	3.84	7.69	11.53	15.37	19.22	OC	3.84	7.69	11.53	15.37	19.22
OB	3.84	7.69	11.53	15.37	19.22	OD	3.84	7.69	11.53	15.37	19.22

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	245.19	244.92	243.07	231.76	224.59	232.11	235.98	201.03	126.21	52.44
OB	245.19	244.92	243.07	231.76	224.59	232.11	235.98	201.03	126.21	52.44
OC	245.19	244.92	243.07	231.76	224.59	232.11	235.98	201.03	126.21	52.44
OD	245.19	244.92	243.07	231.76	224.59	232.11	235.98	201.03	126.21	52.44

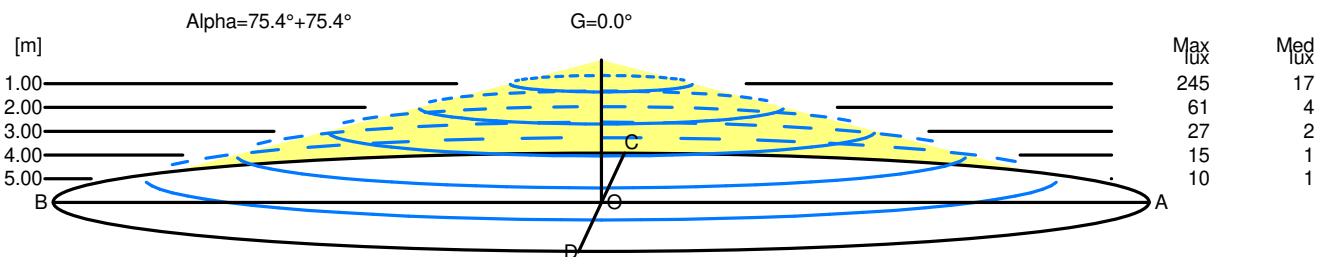

H[m]	D[m]	Max lux	Med lux	Alpha=75.4°+75.4°	G=0.0
1.00	7.69	245	17		
2.00	15.37	61	4		
3.00	23.06	27	2		
4.00	30.75	15	1		
5.00	38.43	10	1		