

Turn Around family

Carlotta de Bevilacqua

Artemide®

turn around family

Turn Around

Carlotta de Bevilacqua
2019


Turn Around inverts the approach to the light system, starting from the principles of sustainability, reduction, lightness, integration, optoelectronic intelligence, application freedom and interaction.

It is a combination of different structural and lighting solutions that adapt to last-minute space thanks to its minimal section.

It is a composition based on a very small track, with a patented section dictated by the standard thickness of plasterboard, meaning it can be inserted into the available space in any situation.

Various linear, 90° angle and curved modules can be combined with electrical and mechanical continuity, availing of the utmost freedom to create every different shapes.

PATENT OF INVENTION: ELECTRO-MECHANICAL SECTION
PATENT OF INVENTION: SHARP



ARTEMIDE
APP



For further information on Turn Around
visit artemide.com




Turn Around is an innovative system

The freedom to design light in space is ensured by the flexibility to combine different geometries within the structure and also by the possibility to integrate different performances.

Indeed, the same track can accommodate a linear module for diffused light, plus sharping, spot and suspension modules.



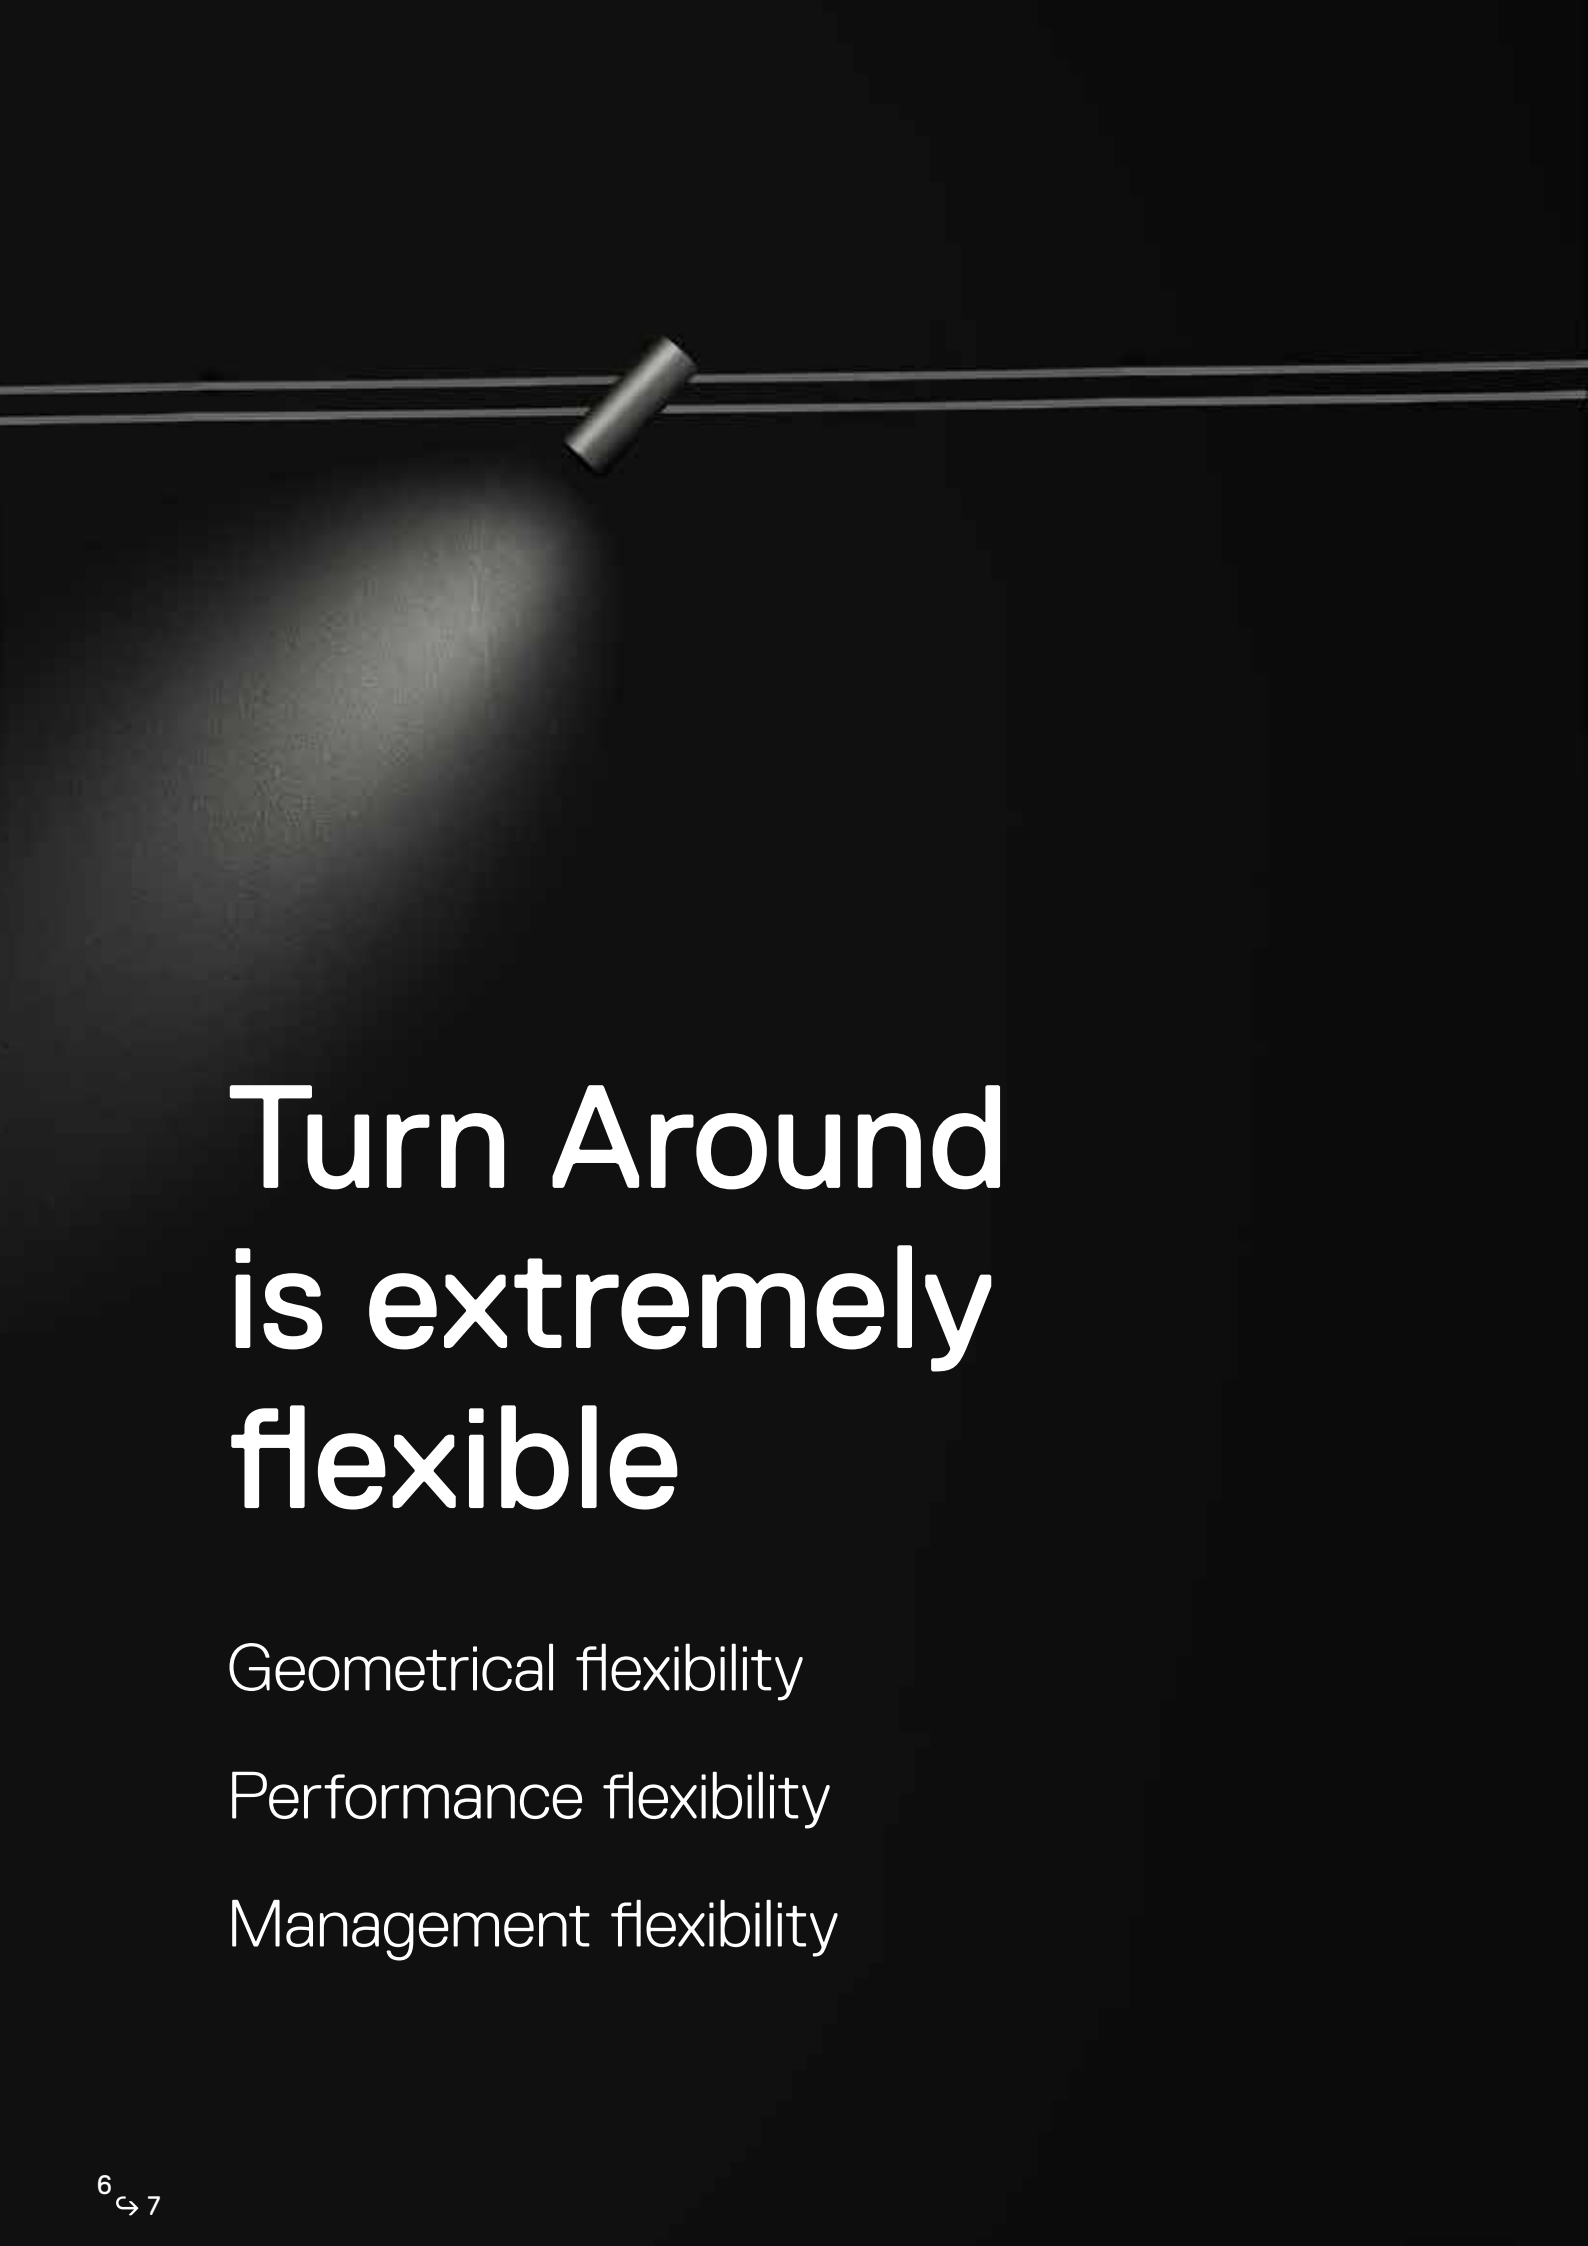


Turn Around is extremely flexible

Geometrical flexibility

Performance flexibility

Management flexibility

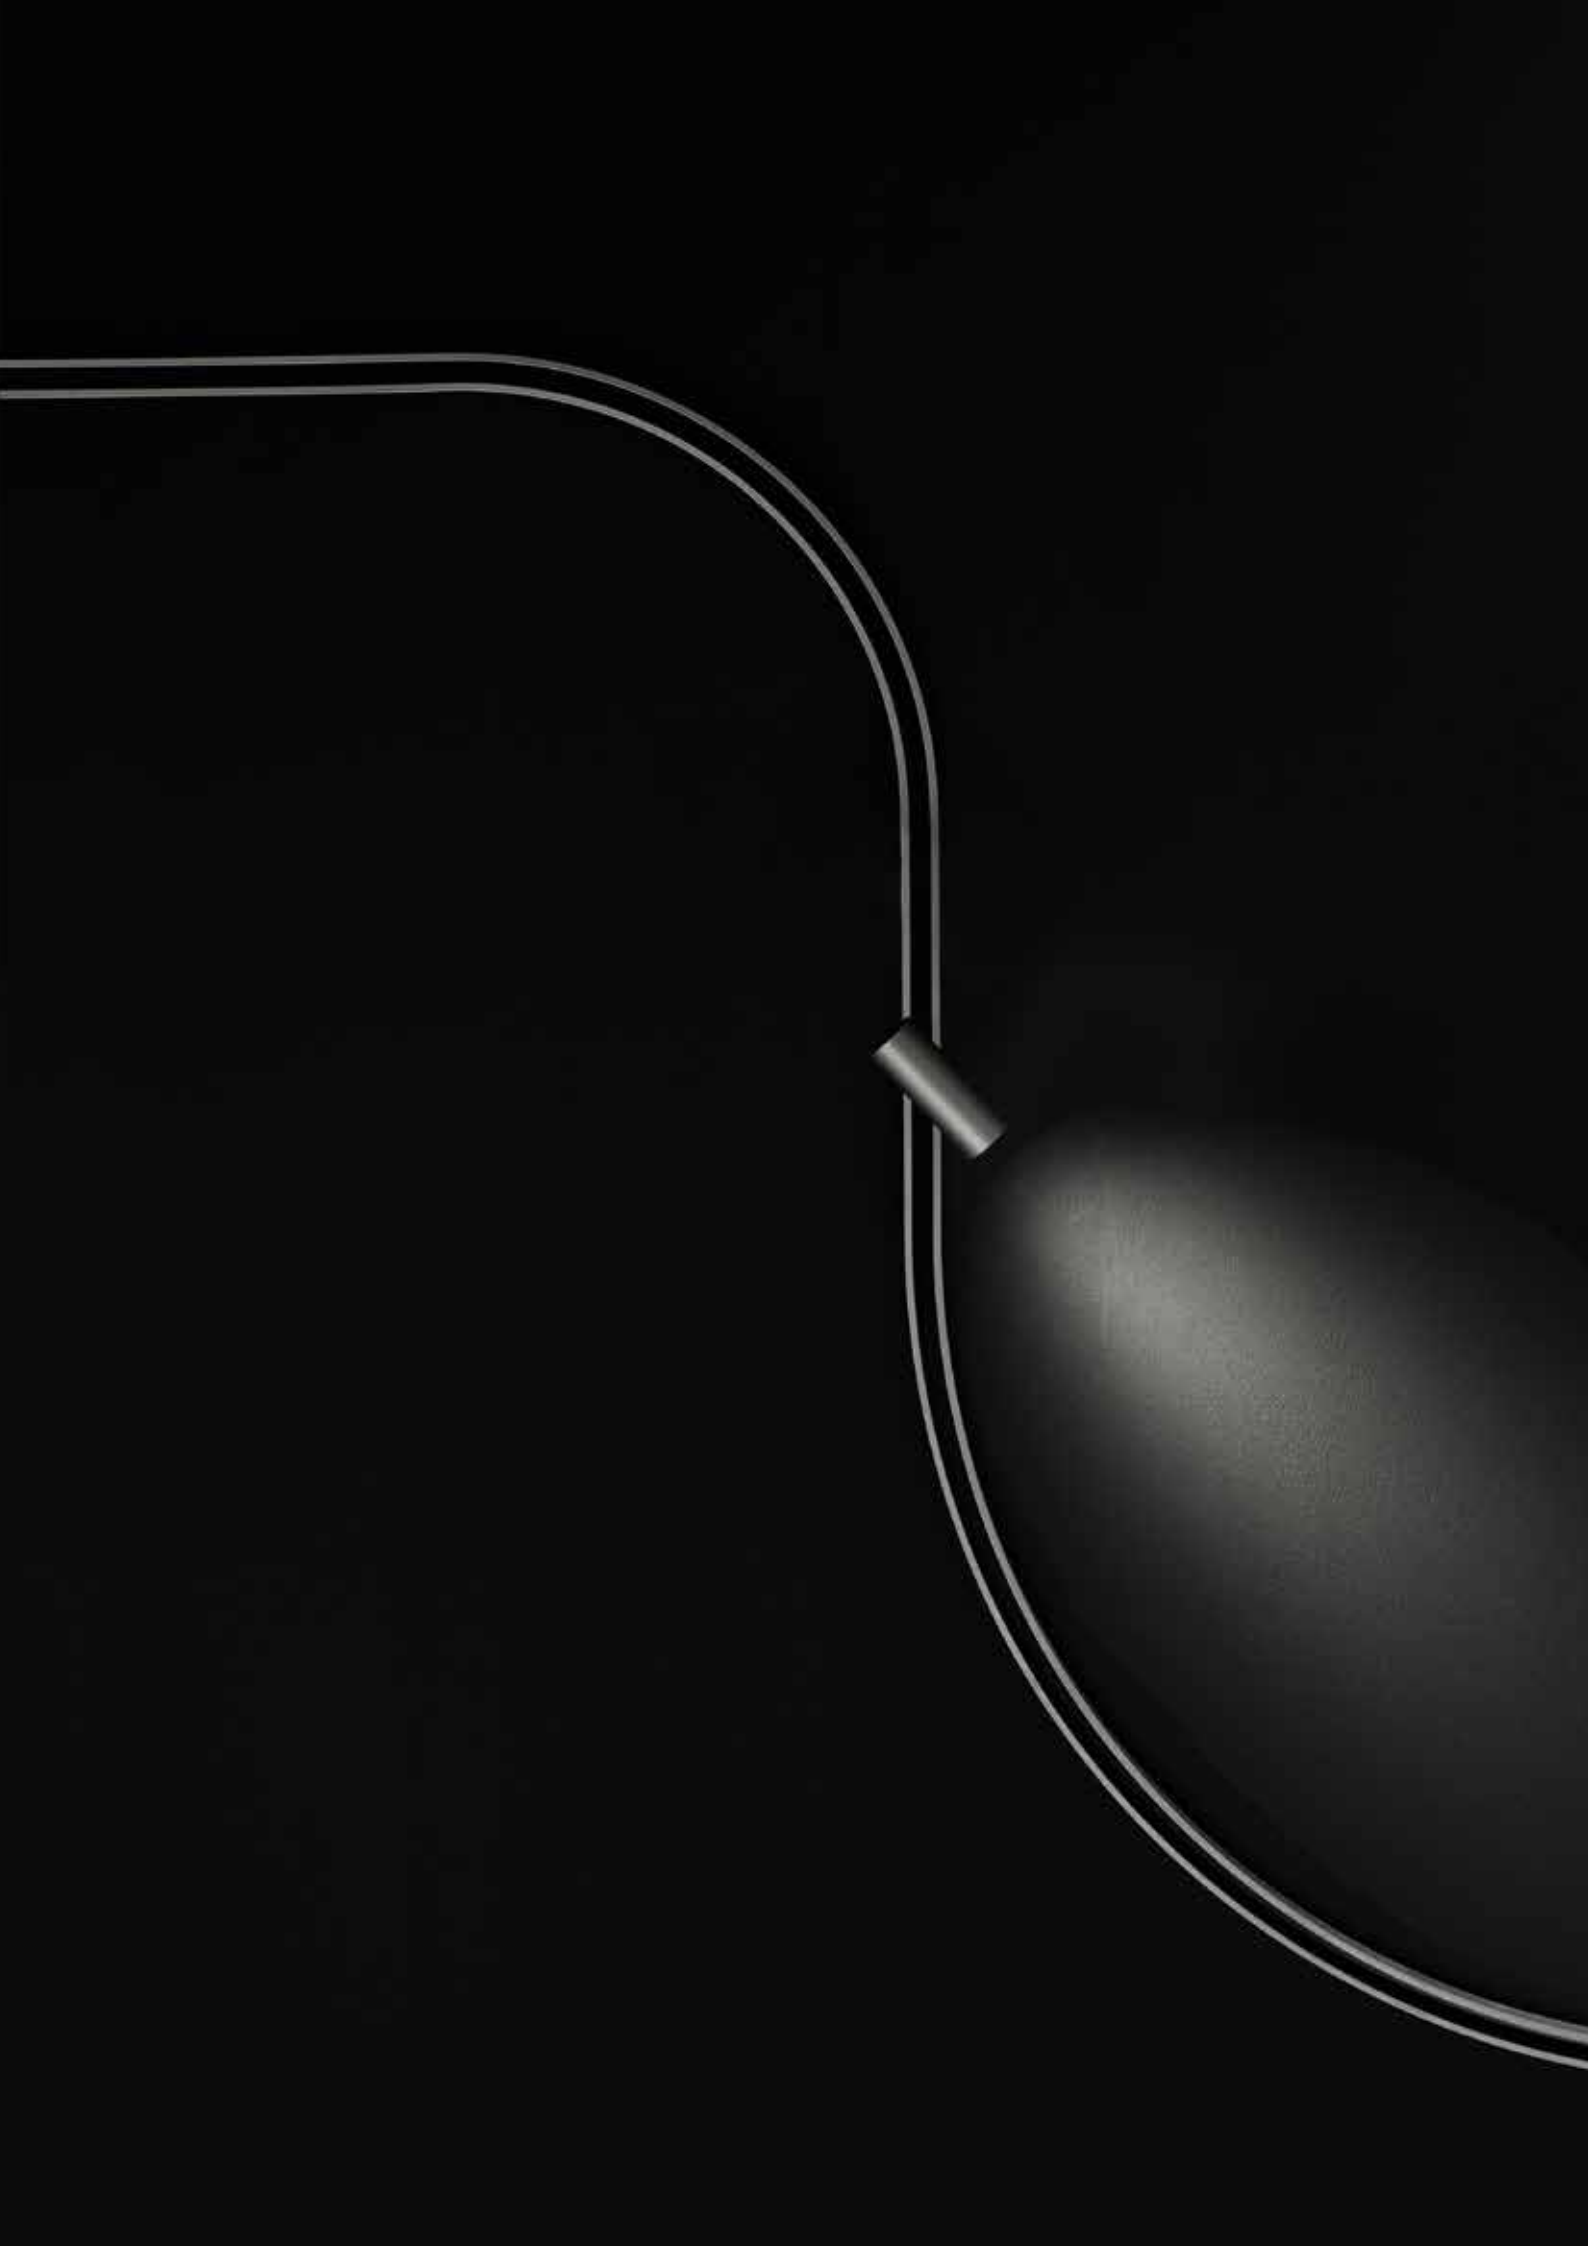


Reduce to innovate

Energetic Infrastructure
A single continuous energetic infrastructure that accommodates various light performances.

48V
Powered at 48V, there are no practical length limits of the system but only of installed power.

Electronic Bridge
An “invisible” joint permits to transfer power and D.Art from one section to the following, allowing the possibility to insert endless diffused flexible modules.

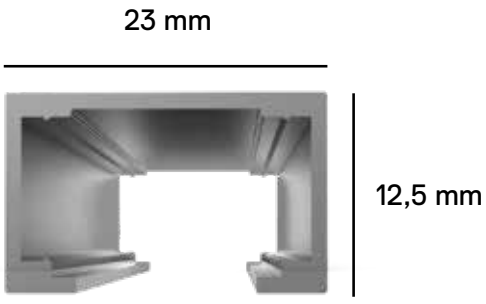



OFF
ON
ZERO
mm/inch

Asserting one’s spatial freedom


Challenging the fundamental sustainability

h 12.5 x 23 mm for recessed version
Profile dimensions can be integrated into the standard plasterboard thickness without interfering with the structural warping.

Recessed / SMD / suspension
The profile is integrated into the space in the built-in, ceiling and suspension versions.

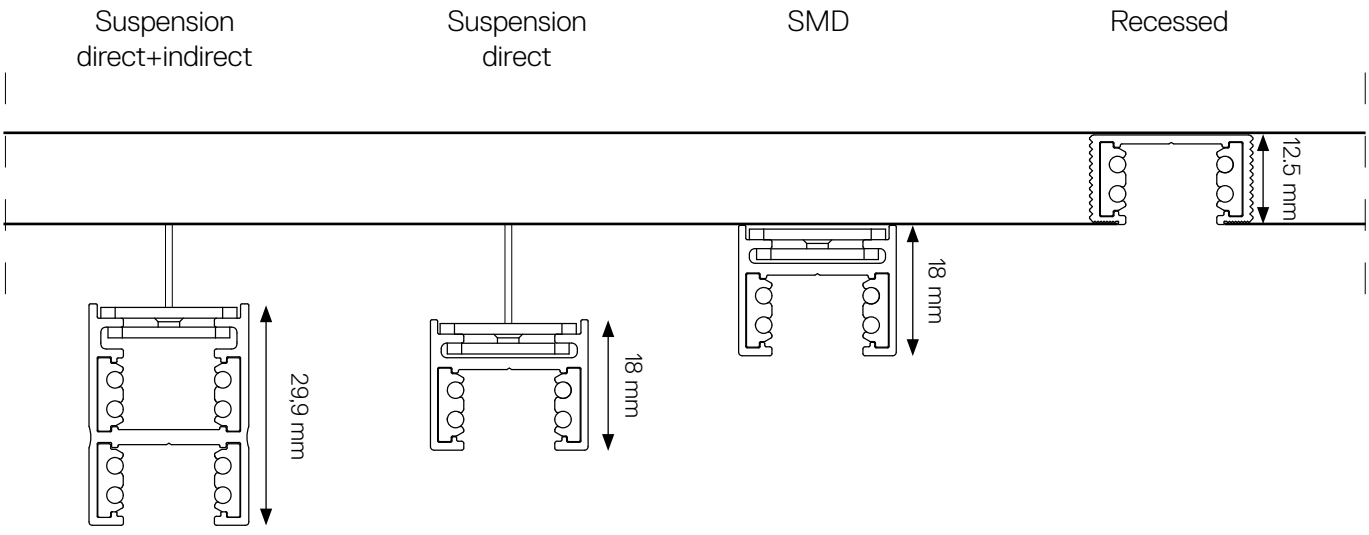

False ceiling scheme

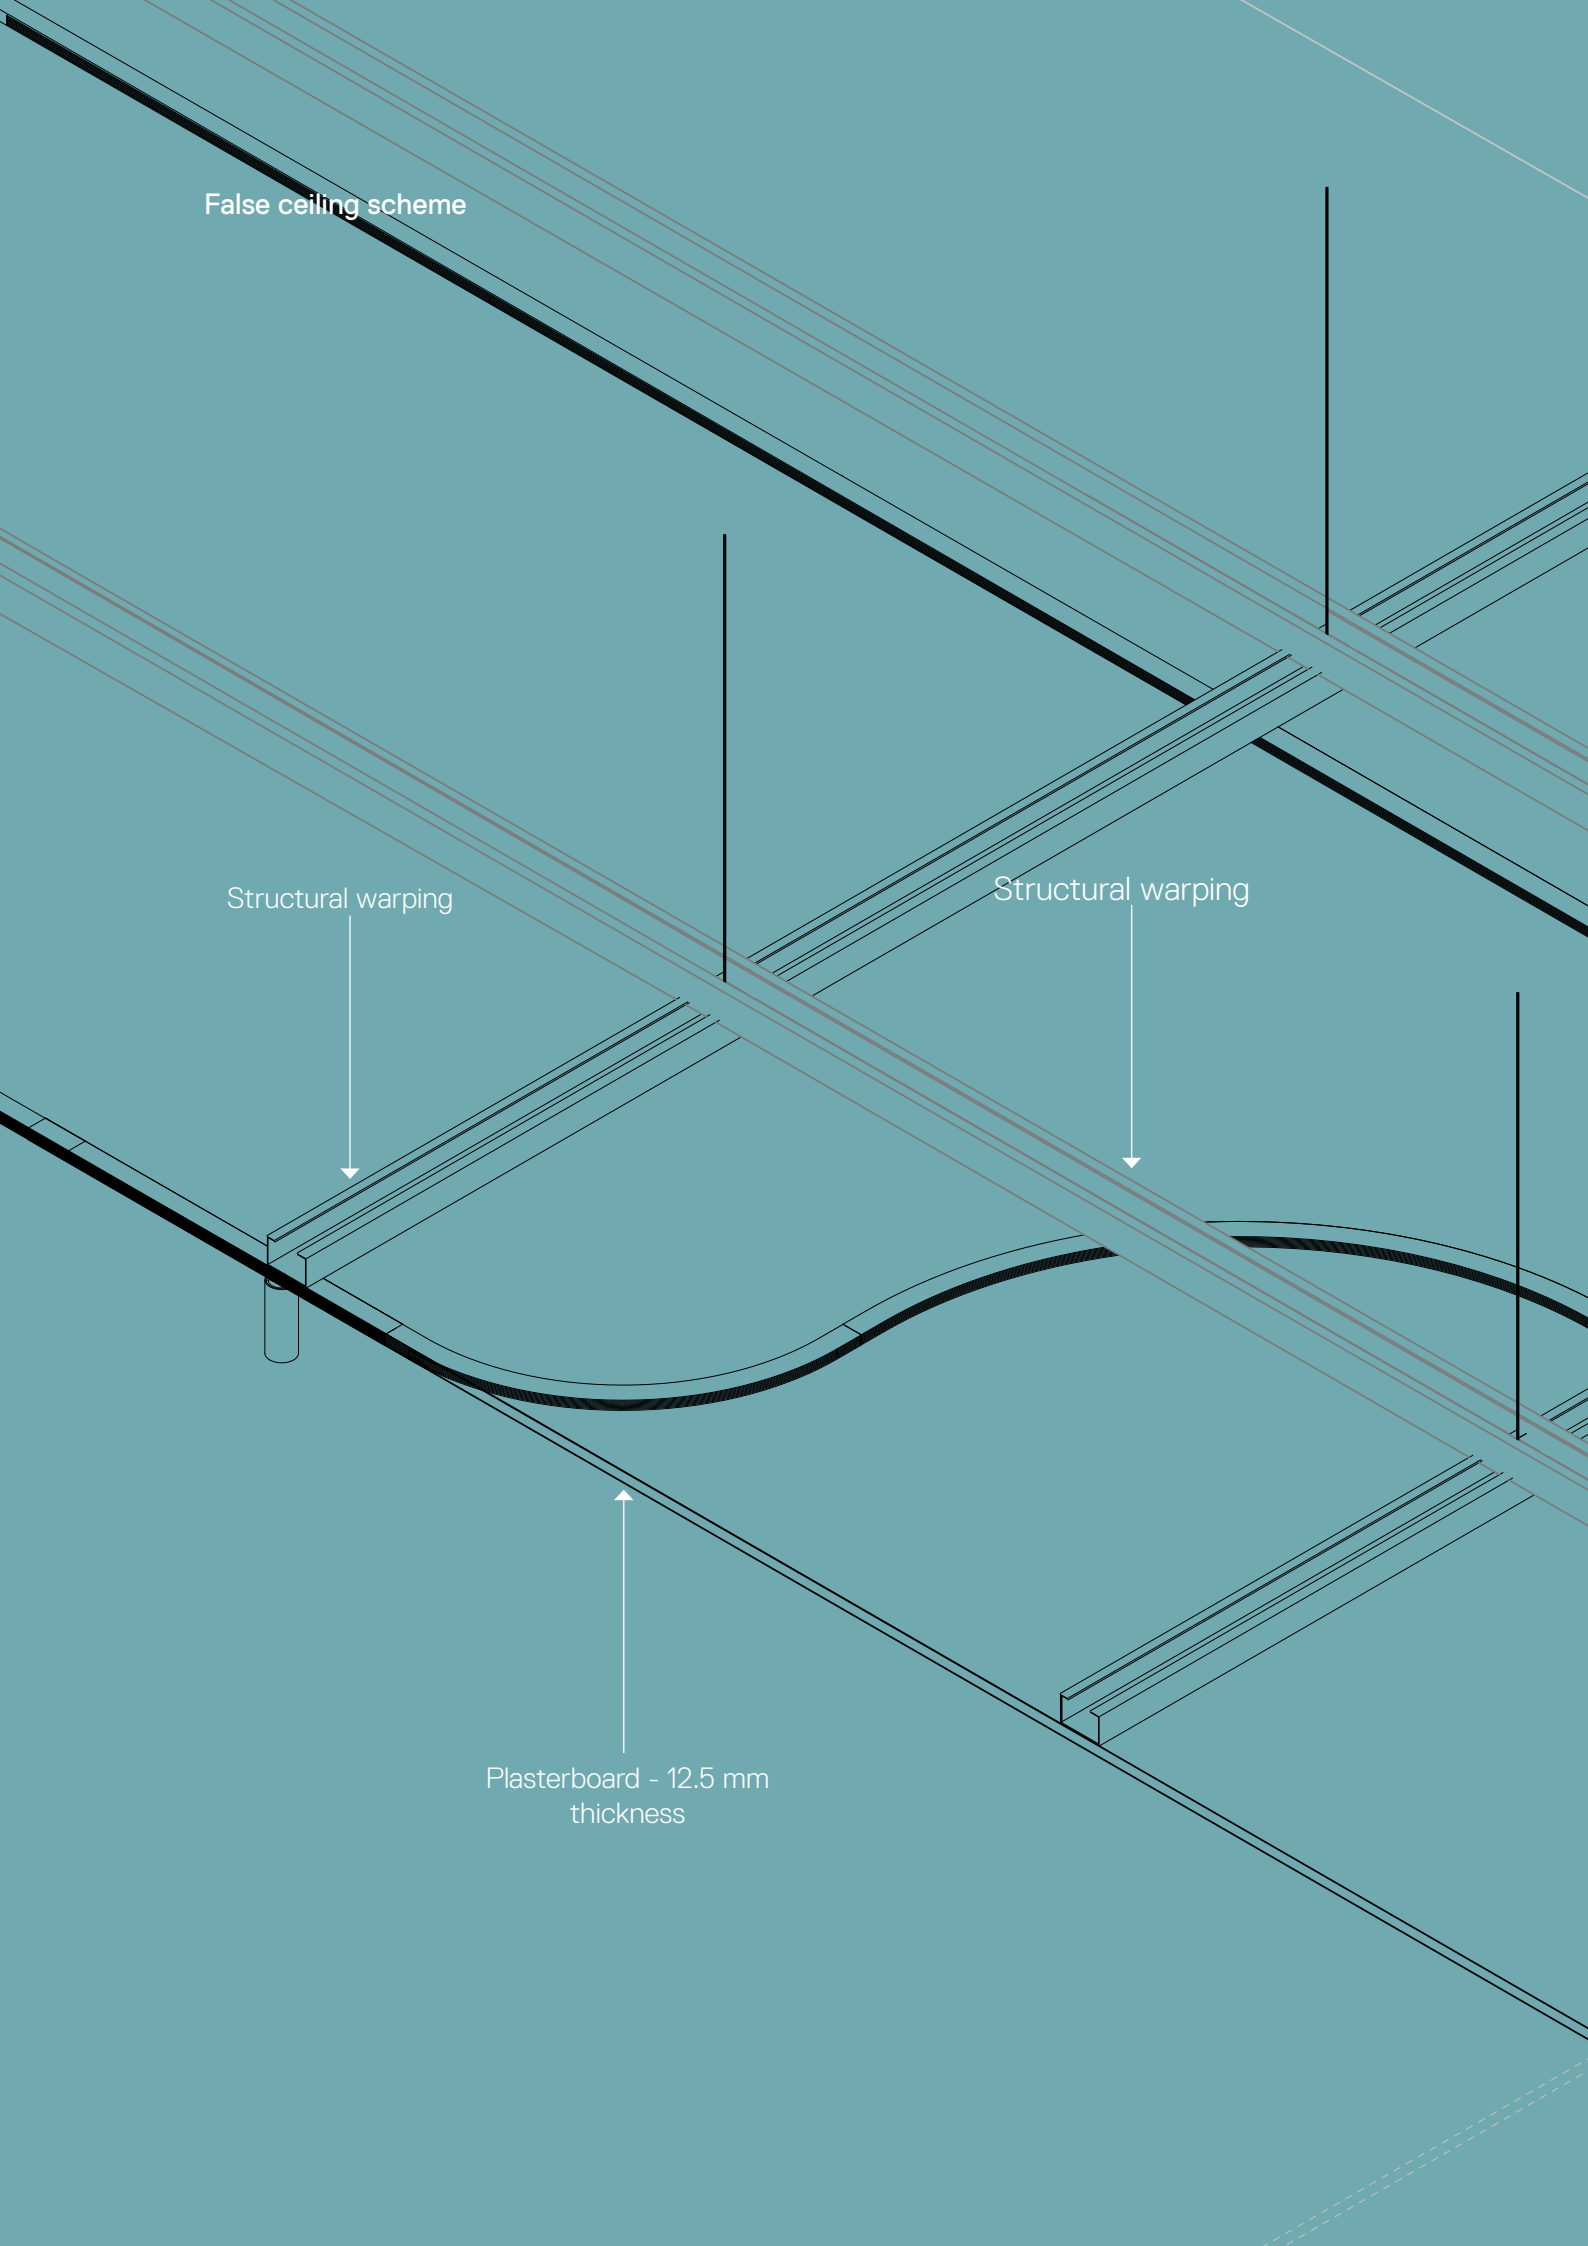

Turn Around infrastructure


Integrating different performances

Track 48V
23 x h 12,5 mm (Recessed)
22 x h 18 mm (SMD, suspension direct)
22 x h 31 mm (Suspension direct+indirect)
1000 / 2000 / 3000 mm


- Black (Recessed)
- Titanium (SMD, Suspension)

Angular and curved elements

Curves: 90°
Rays: 700 mm, 470 mm, 270 mm

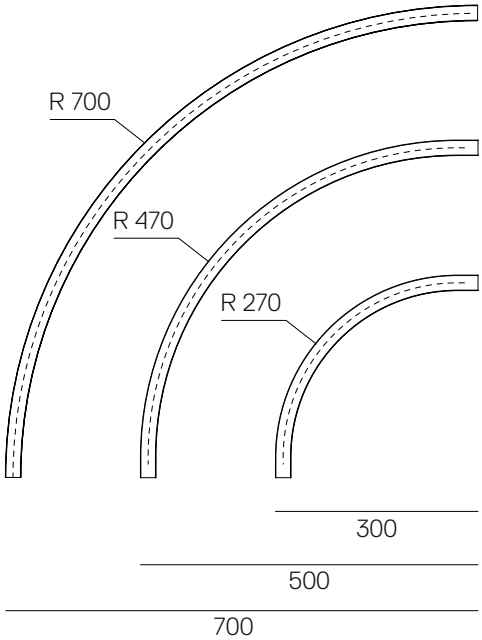

Curves: 60°
Rays: 700 mm, 470 mm, 270 mm

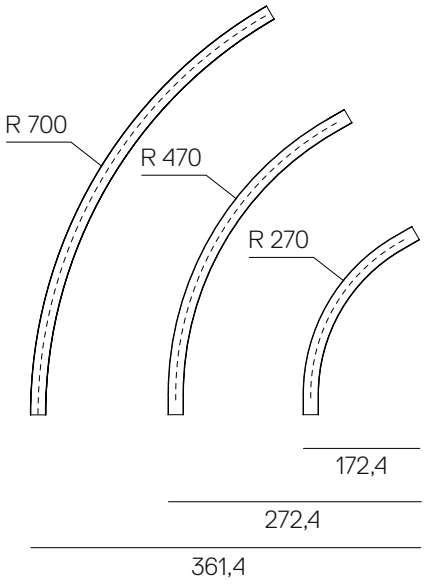

Linear elements recessed

1000 mm

2000 mm

3000 mm

Linear elements SMD - Suspension direct emission

1000 mm

2000 mm

3000 mm


Linear elements suspension direct + indirect emission

1000 mm


2000 mm

3000 mm


Curves: 45°
Rays: 700 mm, 470 mm, 270 mm

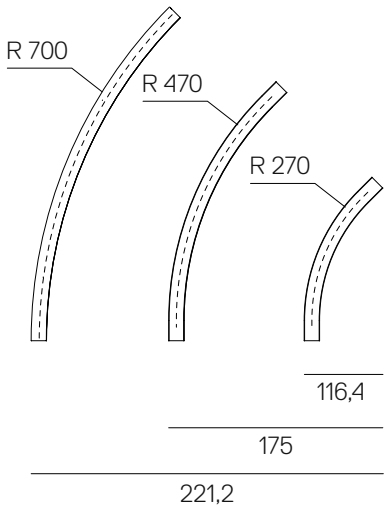


90° Angle
same plane recessed



90° Angle
same plane
suspension direct
emission and SMD



90° Angle
same plane
suspension direct +
indirect emission




One body for all the light appliances



Vector

Vector pendant

Square

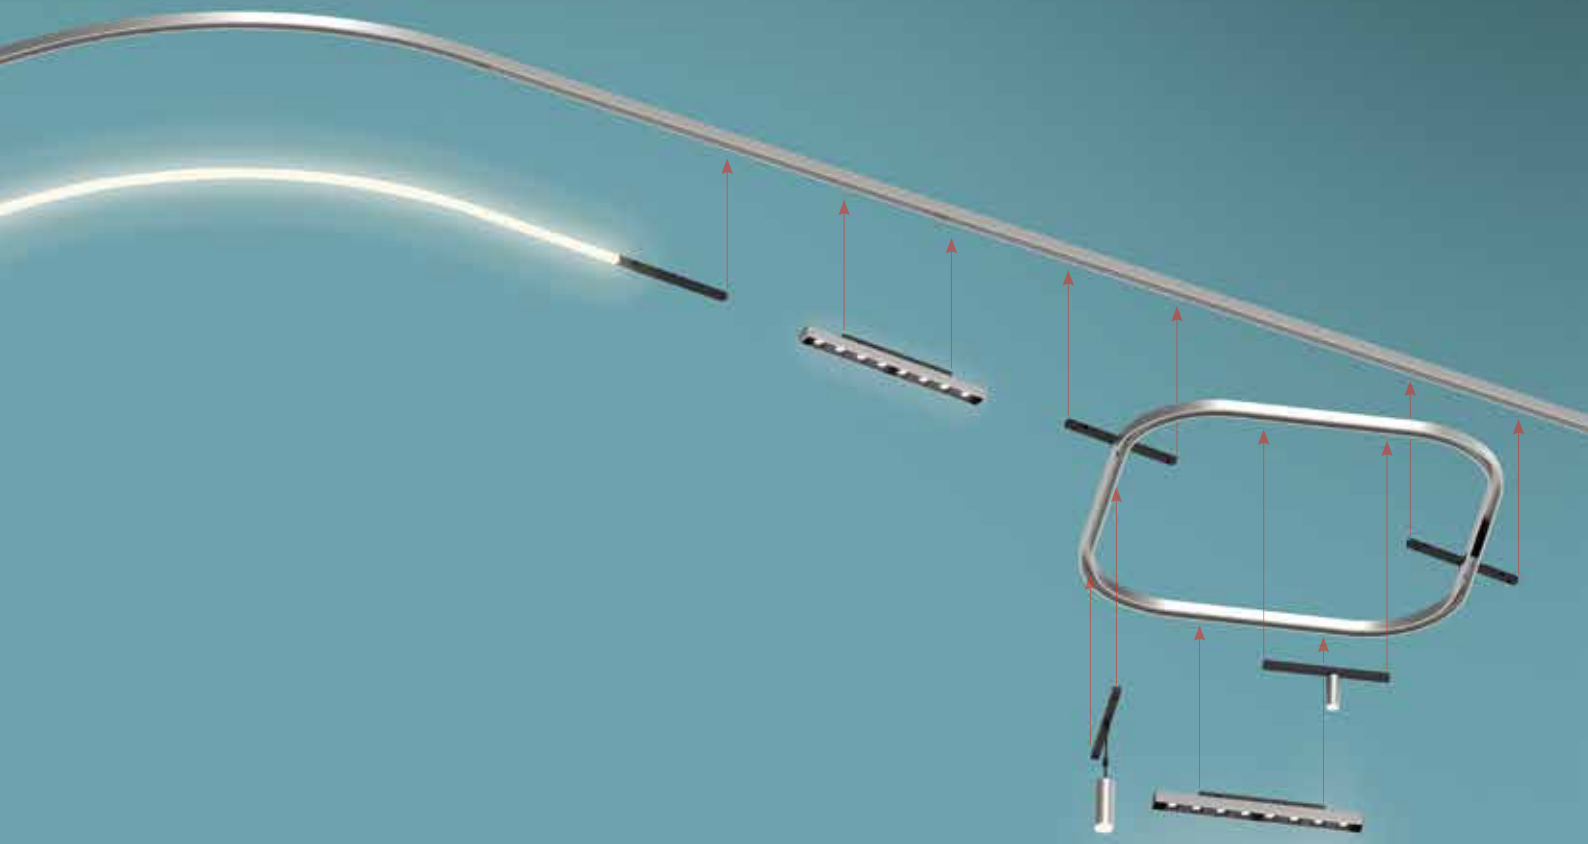

Diffused flexible module


Sharp or diffused
linear module


Square track
+ Vector
+ Vector pendant
+ Sharp

Turn Around light appliances

Integrating different performances


Diffused flexible module
15 x h 10 mm
540 lm/m installed
9W/m
3000K
Max length 4,5 m






Vector 30 pendant
Ø 30 x h 77 mm
335 lm* - 7W

Vector 40 pendant
Ø 40 x h 103 mm
584 lm* - 10W

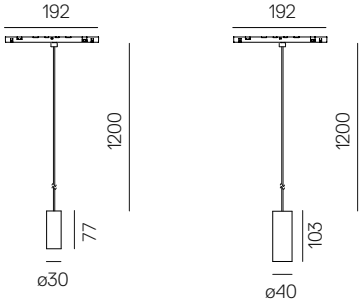




Vector 20
Ø 20 x h 50 mm
180 lm* - 3,5W

Vector 30
Ø 30 x h 77 mm
335 lm* - 7W


Vector 40
Ø 40 x h 103 mm
584 lm* - 10W





Sharp 8
316 x 27 x h 20 mm
1071 lm* - 14W

Sharp 12
464 x 27 x h 20 mm
1607 lm* - 19W

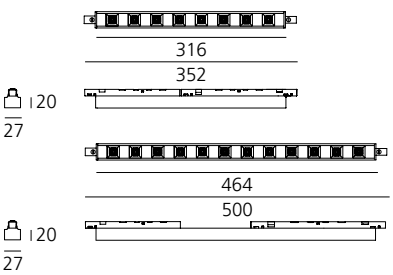





* 3000K values


Diffused linear module 600
599 x 27 x h 20 mm
1421 lm* - 15W

Diffused linear module 1200
1187 x 27 x h 20 mm
2843 lm* - 30W

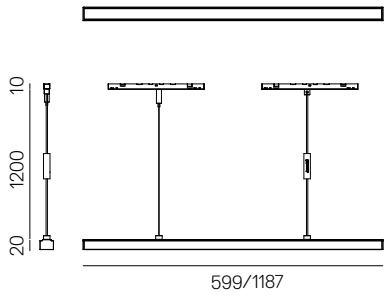





Horizontal square track
590 x 590 x h 17,5 mm

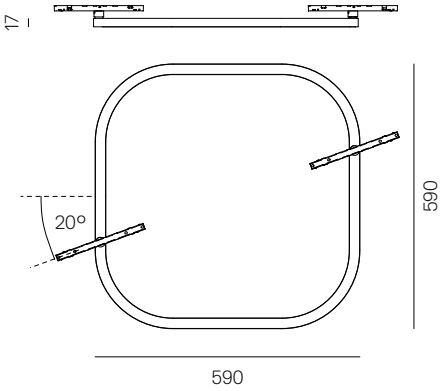





Horizontal square diffused Strip LED
Diffused emission
590 x 590 x h 17,5 mm
1001 lm - 18W

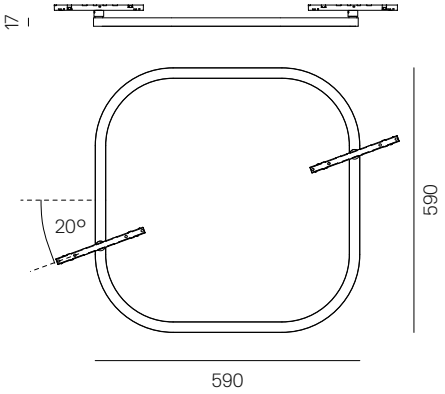



Vertical Square diffused Strip LED
Diffused emission
590 x 590 x h 17,5 mm
976 lm* - 18W

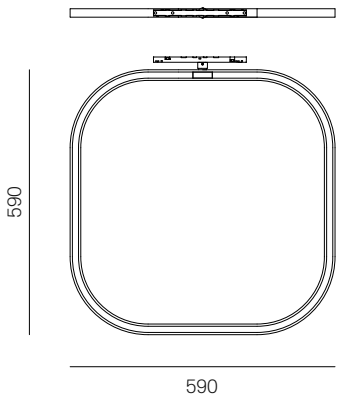




* 3000K values

Turn Around is powered at 48 Vdc

ELEVATION

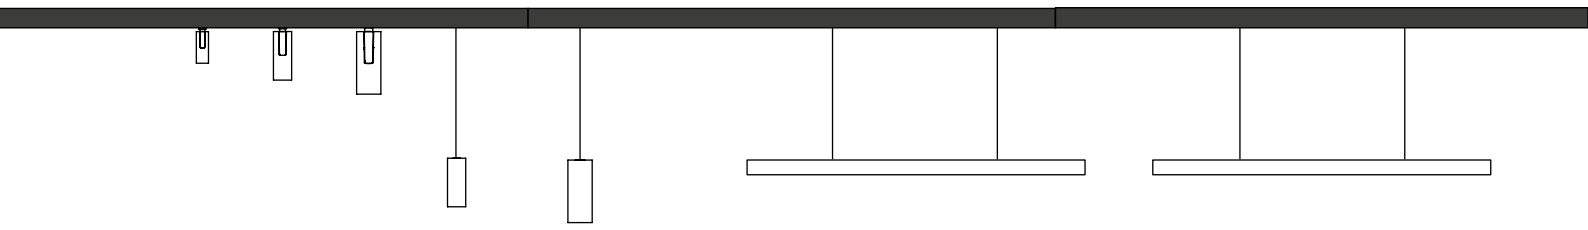

VECTOR 20

max 35 with 1 Power supply 150W
max 60 with 1 Power supply 240W
max 77 with 1 Power supply 320W

VECTOR 30/VECTOR 30 PENDANT

max 17 with 1 Power supply 150W
max 30 with 1 Power supply 240W
max 38 with 1 Power supply 320W

VECTOR 40/VECTOR 40 PENDANT

max 12 with 1 Power supply 150W
max 21 with 1 Power supply 240W
max 27 with 1 Power supply 320W

DIFFUSED LINEAR MODULE 600

max 8 with 1 Power supply 150W
max 14 with 1 Power supply 240W
max 18 with 1 Power supply 320W

DIFFUSED LINEAR MODULE 1200

max 4 with 1 Power supply 150W
max 7 with 1 Power supply 240W
max 9 with 1 Power supply 320W

SHARP 8

max 8 with 1 Power supply 150W

max 15 with 1 Power supply 240W

max 19 with 1 Power supply 320W

SHARP 12

max 6 with 1 Power supply 150W

max 11 with 1 Power supply 240W

max 14 with 1 Power supply 320W

DIFFUSED

FLEXIBLE MODULE 2m

max 7 with 1 Power supply 150W

max 12 with 1 Power supply 240W

max 15 with 1 Power supply 320W


FLEXIBLE MODULE 4,5m

max 3 with 1 Power supply 150W

max 5 with 1 Power supply 240W

max 7 with 1 Power supply 320W


PLAN

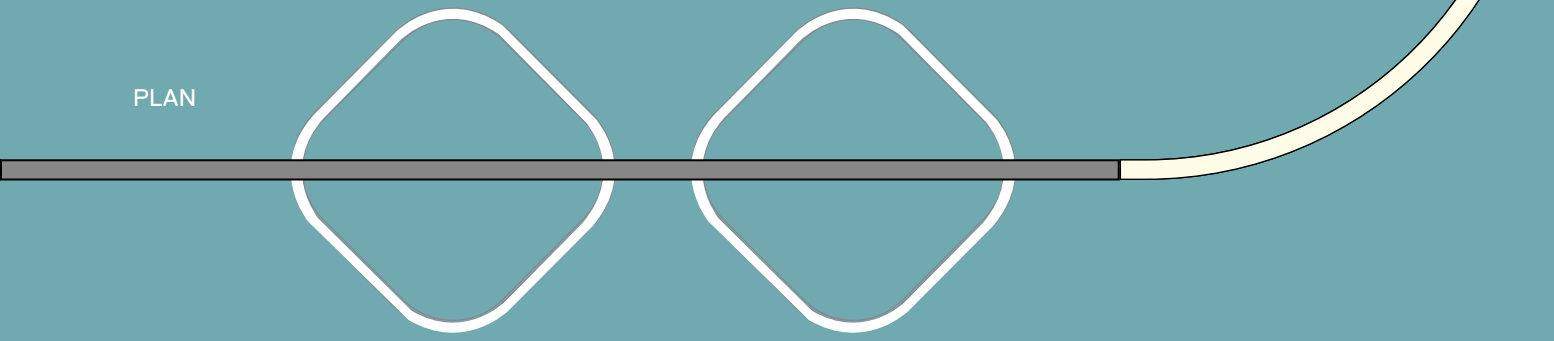

SQUARE INSETS

VECTOR 20, 30, 40

max 3



VECTOR PENDANT

30, 40

max 3

SHARP 8

max 3





Turn Around is safe

a unique feature developed for a real safe DALI interface.



D.Art is a technology designed by Artemide that overcomes the safety limits of the DALI signal in devices where the same signal is accessible to the touch.

The DALI signal is transformed to a “SELV” safety extra low voltage ensuring the total safety of the appliance.

Turn Around has been designed in compliance with international certifications.



Asserting electronic intelligence


Reduce to innovate



ARTEMIDE
APP

Artemide APP
Real time freedom not only during installation but also in the interaction through Artemide APP that manages the DALI addresses present in the system.

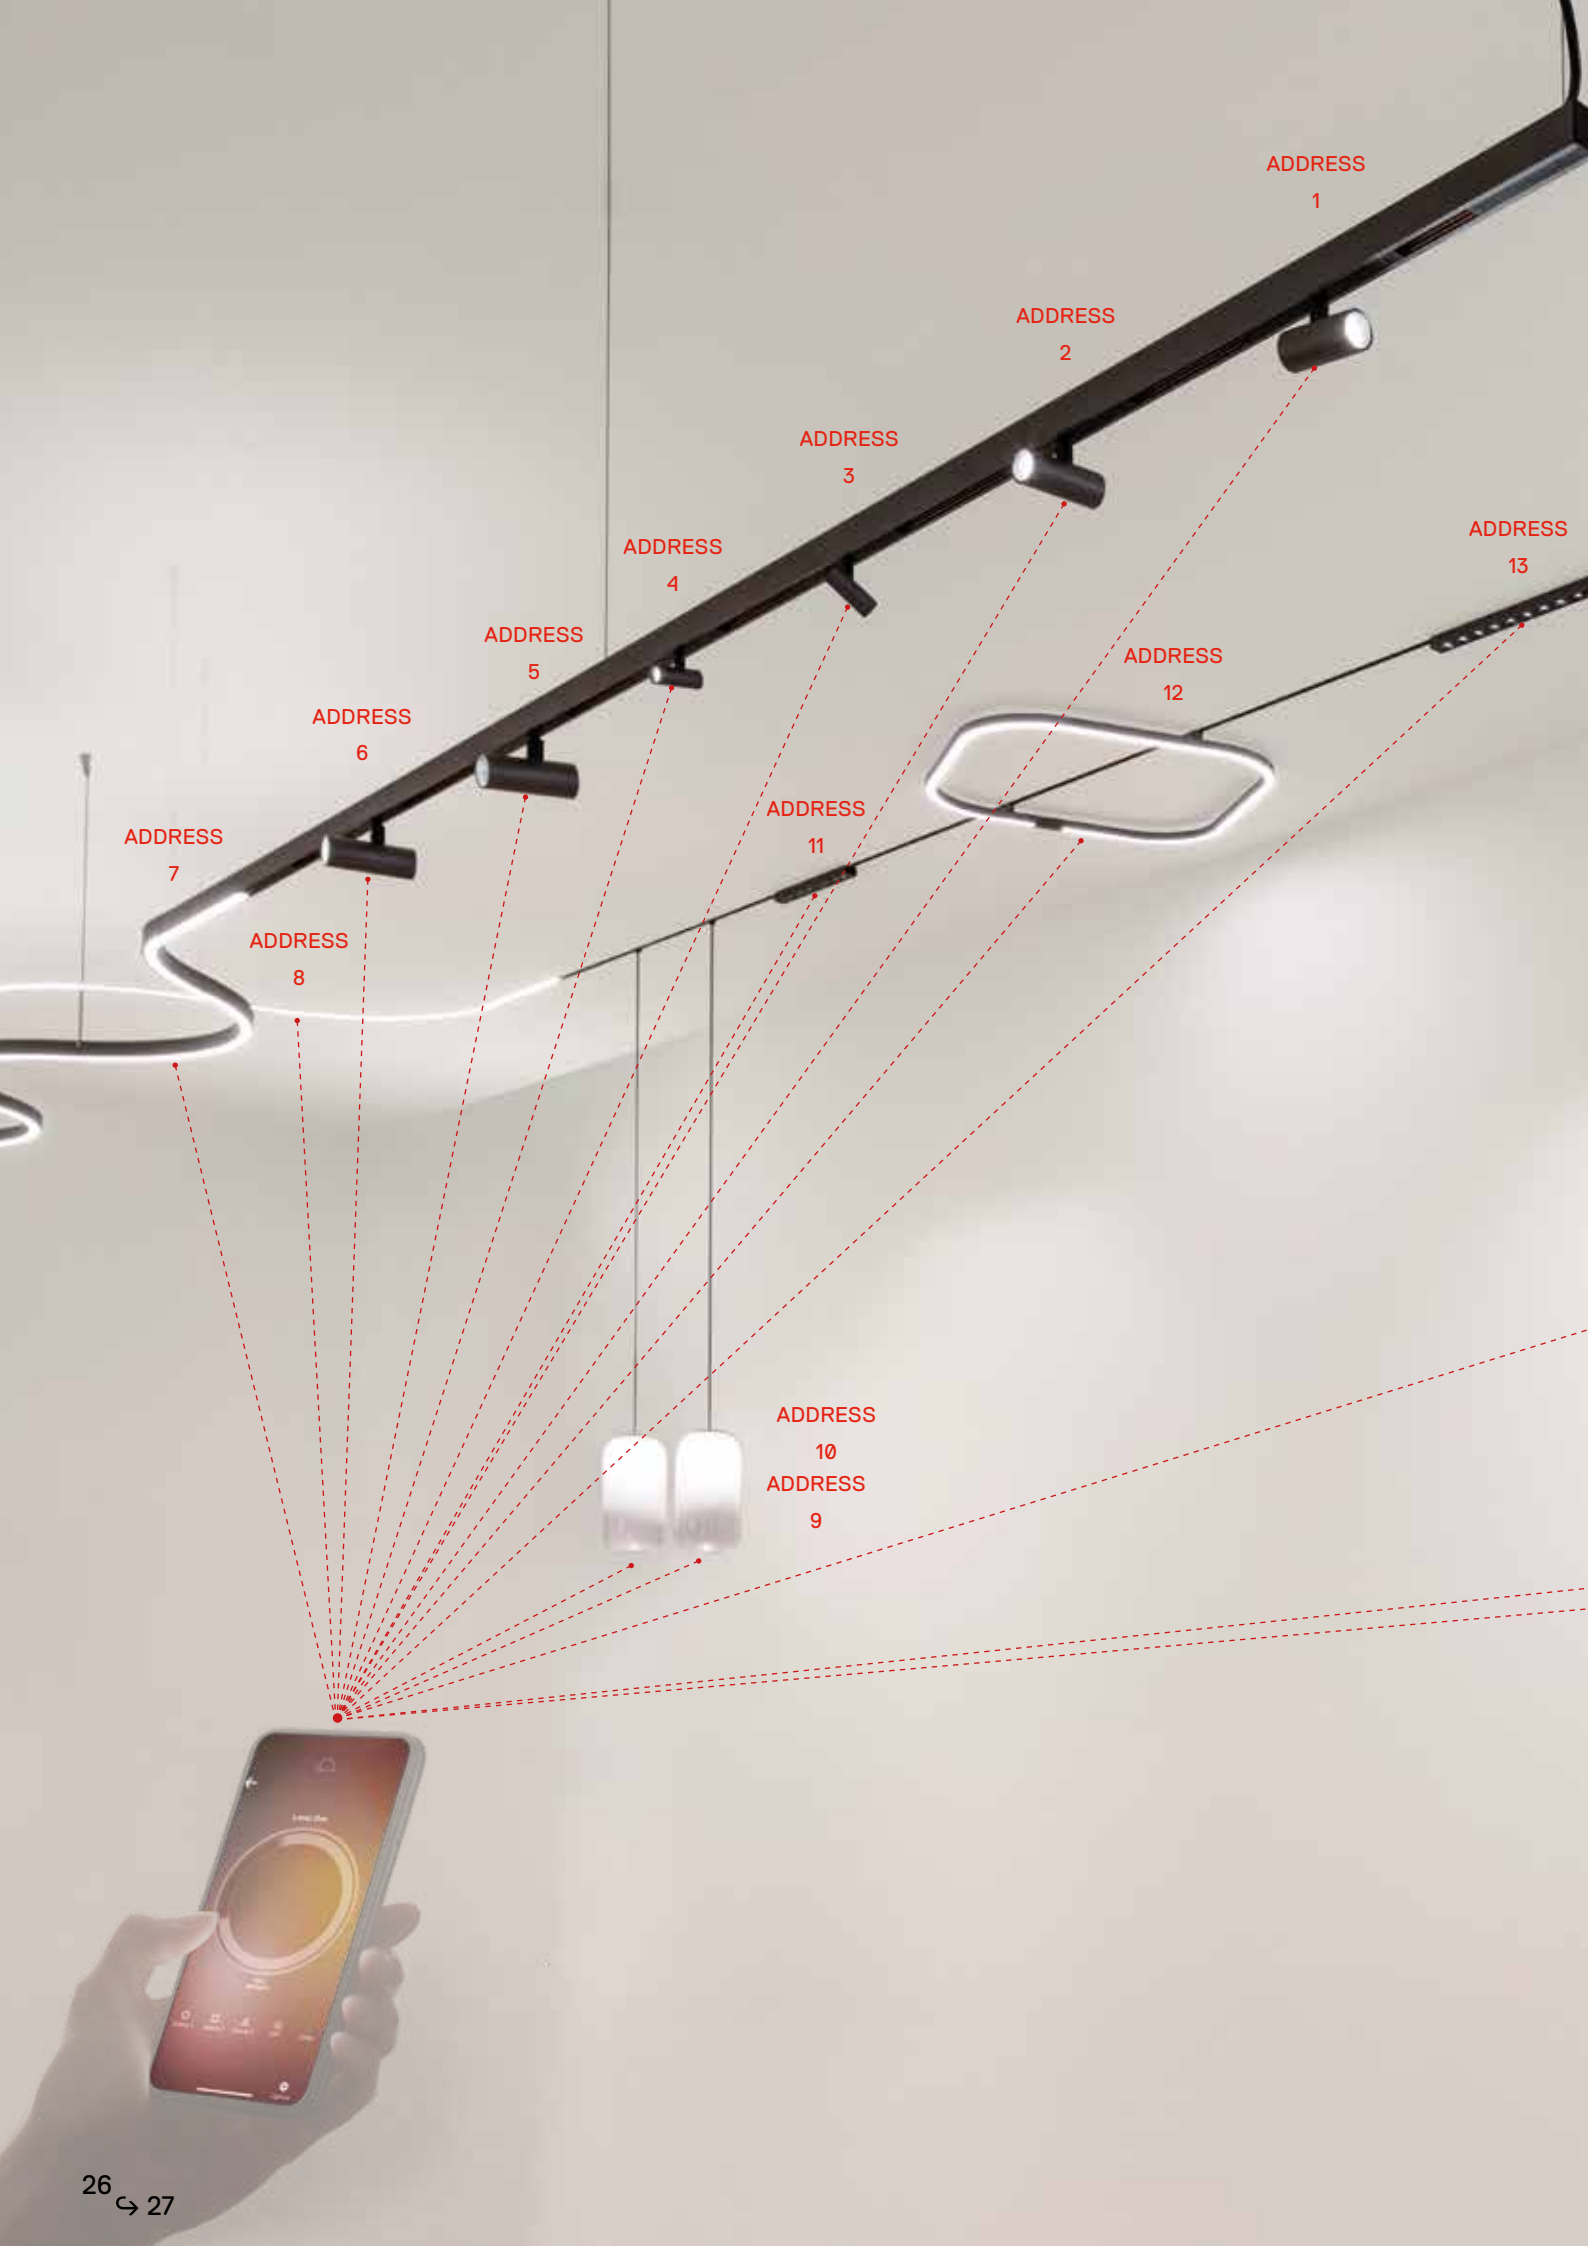



ADDRESS 1
ADDRESS 2
ADDRESS 3
ADDRESS 4
ADDRESS 5
ADDRESS 6
ADDRESS 7
ADDRESS 8
ADDRESS 9
ADDRESS 10
ADDRESS 11
ADDRESS 12
ADDRESS 13







Turn Around is fully addressable

Each lighting appliance can be managed separately by Artemide APP or by DALI control

Turn Around power supply

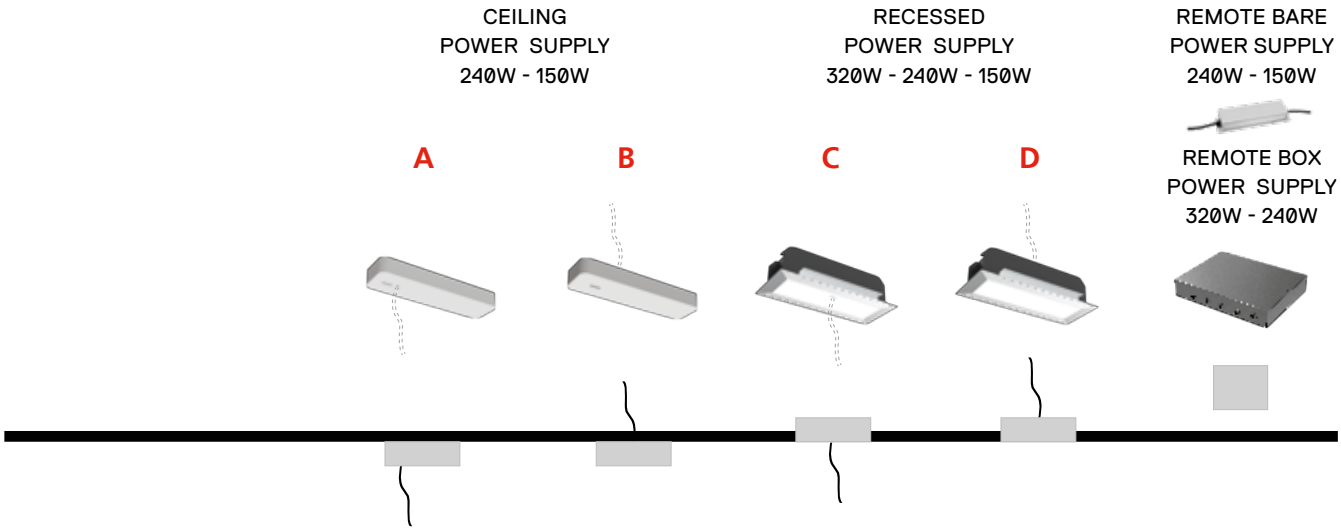


	A	B	C	D	REMOTE BOX
SUSPENSION		●		●		●
SMD		●	●			●
RECESSED			●		●	●

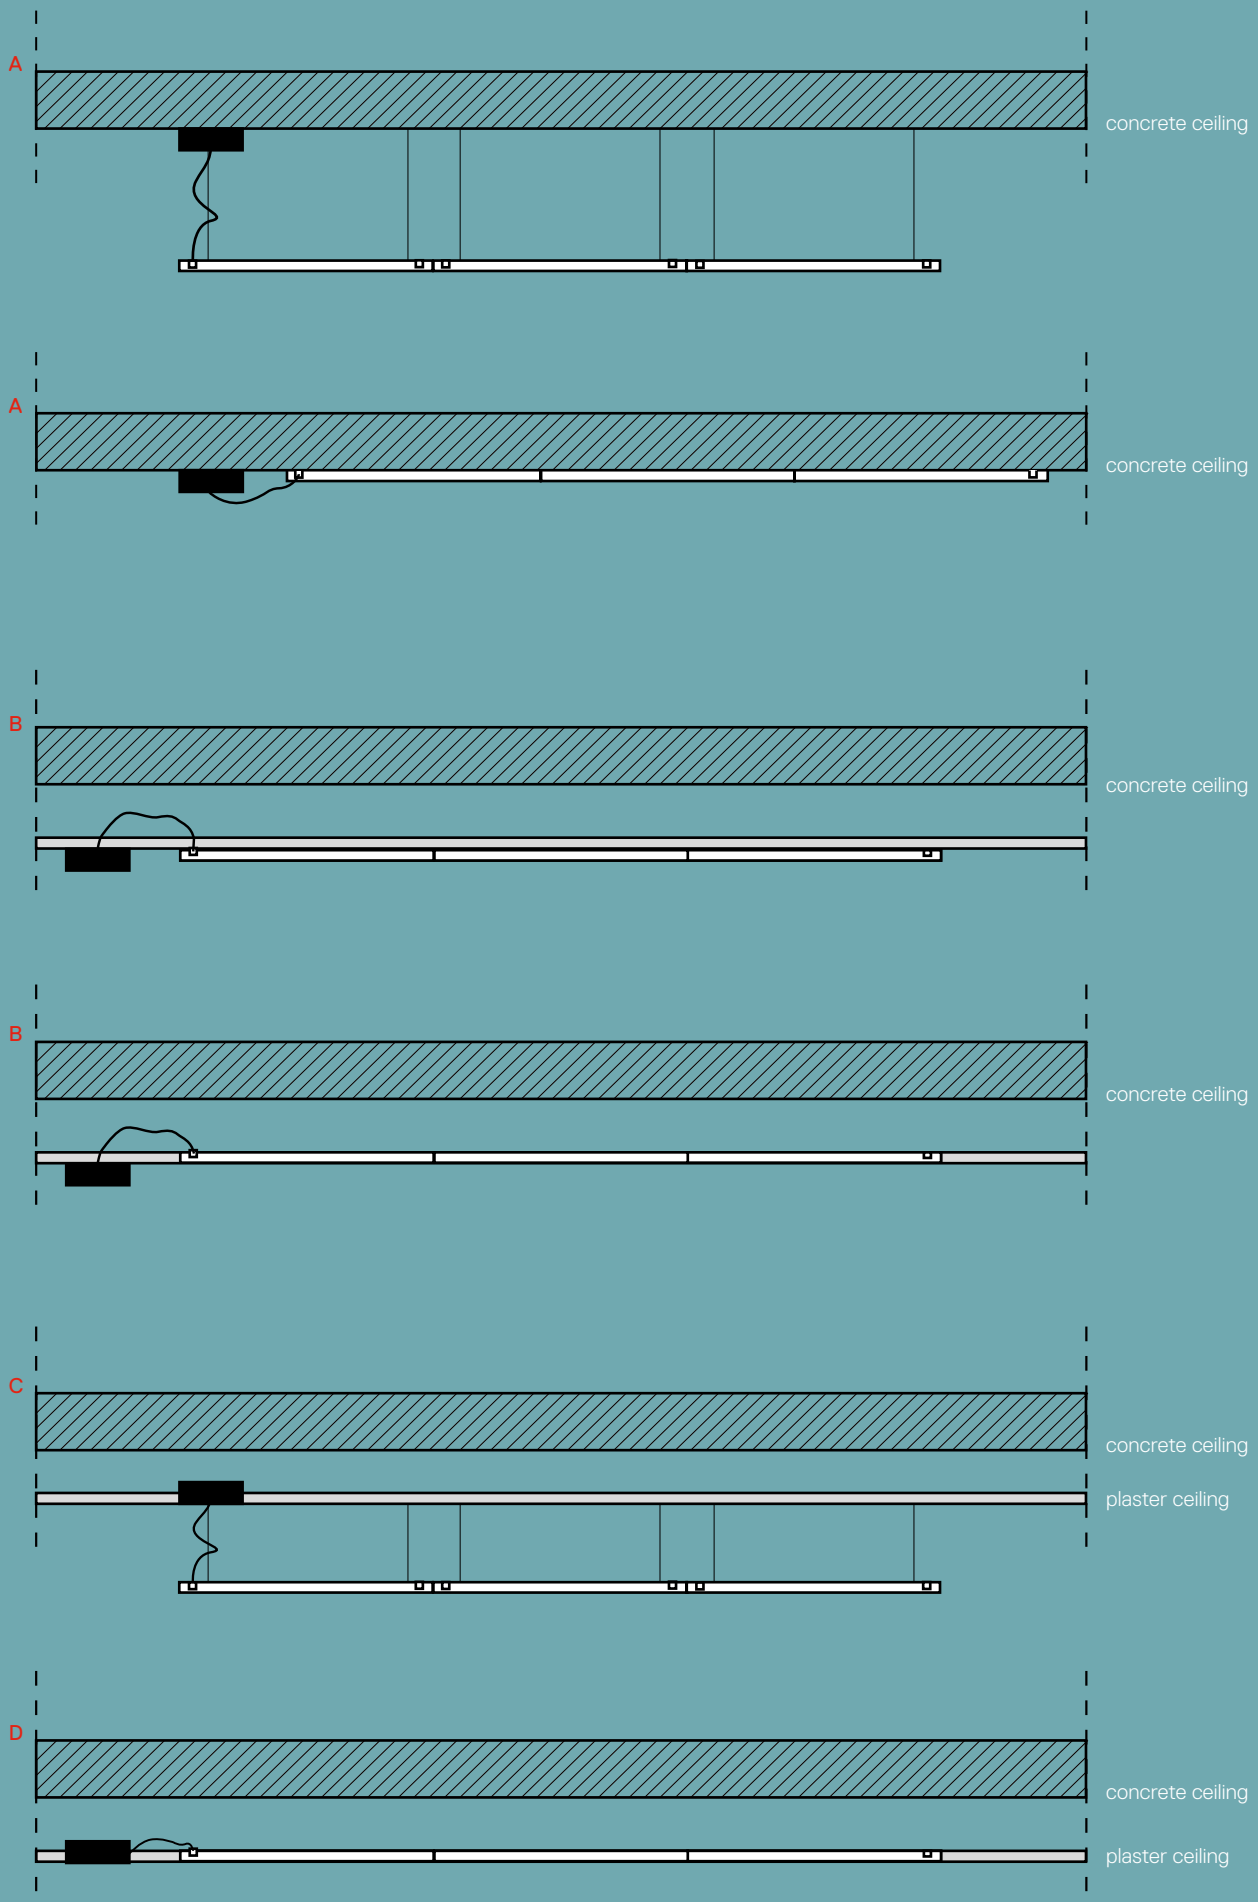
A
concrete ceiling
A
concrete ceiling
B
concrete ceiling
B
concrete ceiling
C
concrete ceiling
plaster ceiling
D
concrete ceiling
plaster ceiling

Turn Around structural track



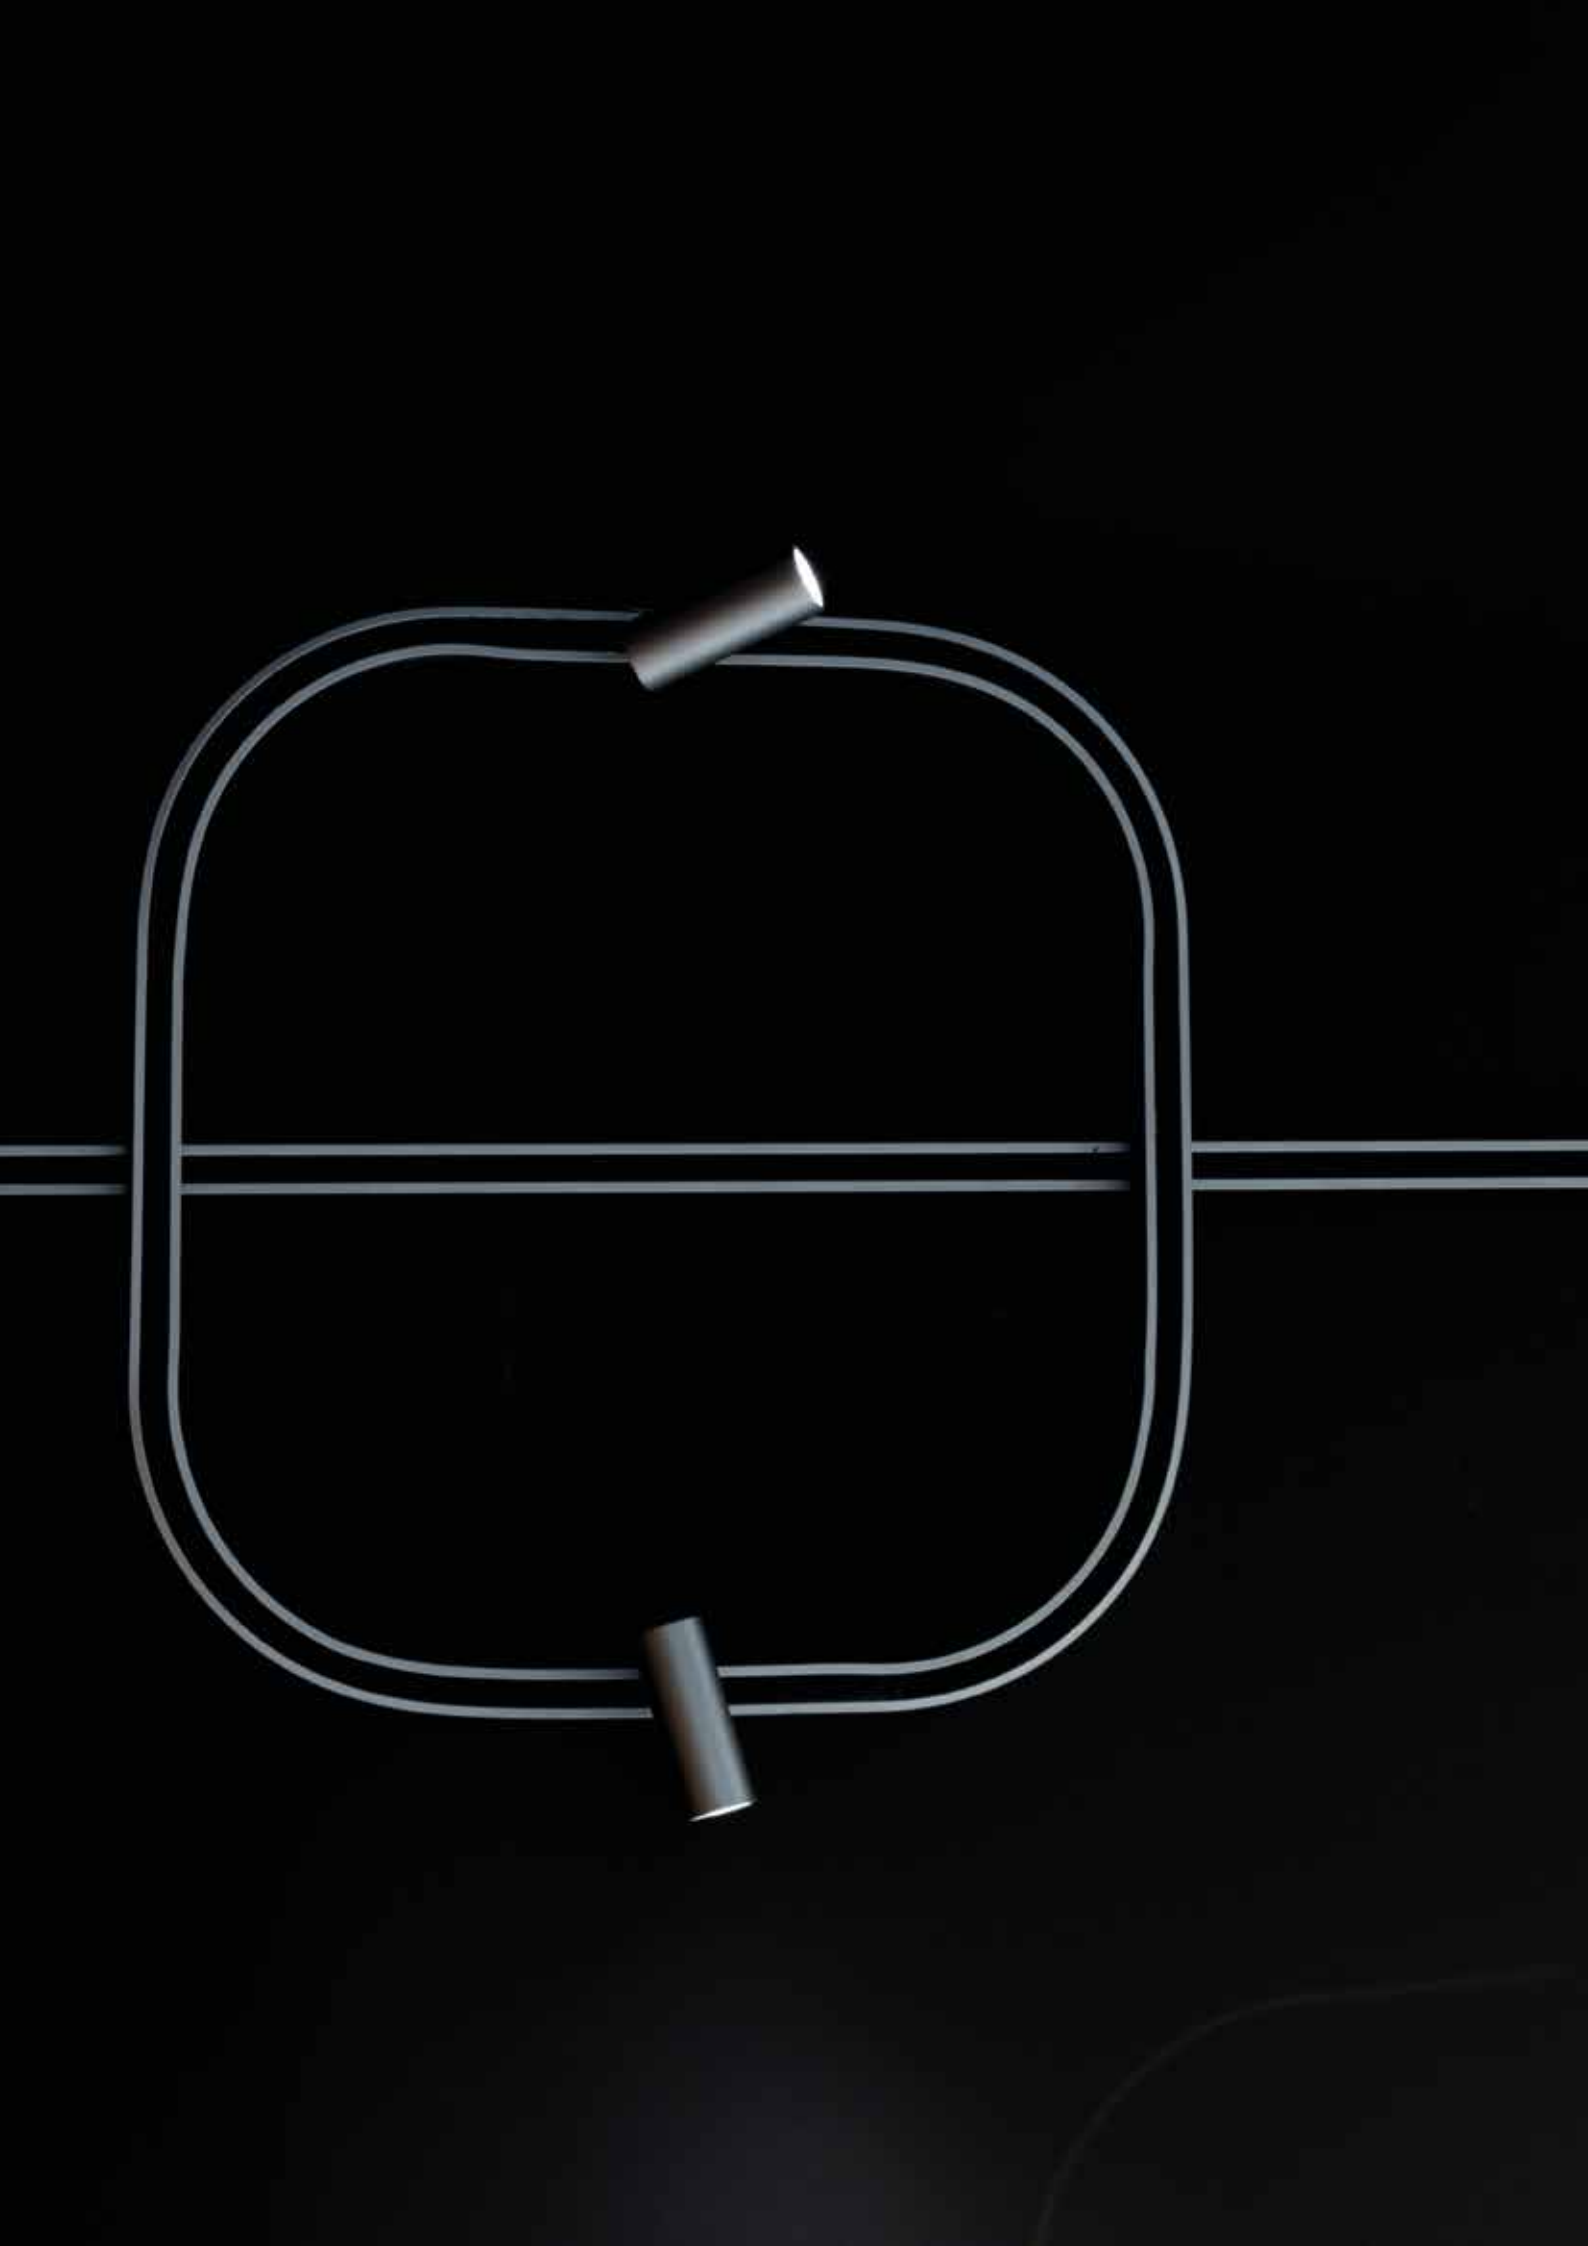

TURN AROUND RECESSED TRACK

Black

IP20

Linear elements


Length	Code
1000 mm	**TA00104**
2000 mm	**TA00204**
3000 mm	**TA00304**






Angle elements

	Code
90° on same plane track angle elements 50 x 50 mm	**TA80004**






Curved joining elements


Radius	Angle	Code
300 mm	45°	**TA30004**
	60°	**TA30304**
	90°	**TA30604**
500 mm	45°	**TA30104**
	60°	**TA30404**
	90°	**TA30704**
700 mm	45°	**TA30204**
	60°	**TA30504**
	90°	**TA30804**




45°



60°



90°



Accessories



	Code
 Fed end cap Cable L= 2500 mm	**TA90600**
 Recessed fixing kit (7pcs) Linear element L= 3000 mm uses 7pcs Linear element L= 2000 mm uses 5pcs Linear element L= 1000 mm uses 3pcs	**TA90100**
 Electro-mechanical Joint kit	**TA90000**

Accessories for cutting components of linear elements

	Code
Shaping tool: to shape insulating conductor support	**TA00000**
Locking tool: to lock insulating conductor spacer into aluminum profile	**TA00100**

Note: no tools provided to cut aluminum profile

White Titanium

Power supply	Undimmable	DALI / 0-10 / 1-10 / PUSH	Dimmable APP
	Code	Code	Code
 320W Recessed power supply kit for recessed modules 230VAC-48VDC **IP**20 ⏚ 395 x 165 x h 107 mm	**TA66001**	**TA66101**	**TA66101APP**
 240W Recessed power supply kit for recessed modules 230VAC-48VDC **IP**20 ⏚ 395 x 165 x h 107 mm	**TA61901**	**TA62001**	**TA62001APP**
 150W Recessed power supply kit for recessed modules 230VAC-48VDC **IP**20 ⏚ 395 x 165 x h 107 mm	**TA61701**	**TA61801**	**TA61801APP**
 240W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC **IP**20 ⏚ 400 x 110 x h 50 mm	○ **TA60501** ● **TA60722**	○ **TA60601** ● **TA60822**	○ **TA60601APP** ● **TA60822APP**
 150 W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC **IP**20 ⏚ 400 x 110 x h 50 mm	○ **TA60101** ● **TA60322**	○ **TA60201** ● **TA60422**	○ **TA60201APP** ● **TA60422APP**
 320W Remote box power supply kit 230VAC-48VDC **IP**20 ⏚ 313 x 243 x h 57,5 mm		**TA68000**	**TA68000APP**
 240W Remote box power supply kit 230VAC-48VDC **IP**20 ⏚ 313 x 243 x h 57,5 mm		**TA62500**	**TA62500APP**
 240W Bare power supply **ON-OFF** 230VAC-48VDC **IP**20 ⏚ (for dimmable version to be combined with "**DV1061**") **244 x 68 x h 38 mm**	**TA98000**		
 150W Bare power supply **ON-OFF** 230VAC-48VDC **IP**20 ⏚ (for dimmable version to be combined with "**DV1061**") **244 x 68 x h 38 mm**	**TA98100**		
 **DALI / 0-10 / 1-10 / PUSH** SELV Interface 103 x 67 x h 21 mm		**DV1061**	

Optional control devices - BLL wireless switch

 Device for switching and controlling Artemide APP products. Max N.3 inputs for external push buttons. Max 1 m distance. Mains power supply required. To be installed inside flush mounting boxes or junction boxes.		**DV1080APP**

TURN AROUND SMD TRACK

Titanium

IP20

Linear elements

Length	Code
1000 mm	**TA10122**
2000 mm	**TA10222**
3000 mm	**TA10322**






Angle elements

	Code
90° on same plane track angle elements 75 x 75 mm	**TA80122**






Curved joining elements


Radius	Alpha	Code
300 mm	45°	**TA40022**
	60°	**TA40322**
	90°	**TA40622**
500 mm	45°	**TA40122**
	60°	**TA40422**
	90°	**TA40722**
700 mm	45°	**TA40222**
	60°	**TA40522**
	90°	**TA40822**




45°




60°





90°



Accessories

	Code
 Fed end cap Cable L= 2500 mm	**TA90600**
 Ceiling bracket kit (4pcs) Linear element L = 3000 mm uses 4pcs Linear element L = 2000 mm uses 3pcs Linear element L = 1000 mm uses 1pcs	**TA90400**
 Electro-mechanical joint kit	**TA90200**

White Titanium

Power supply	Undimmable	DALI / 0-10 / 1-10 / PUSH	Dimmable APP
	Code	Code	Code
 240W Ceiling power supply kit for suspenion and ceiling modules 230VAC-48VDC **IP**20 400 x 110 x h 50 mm	○ **TA61301** ● **TA61522**	○ **TA61401** ● **TA61622**	○ **TA61401APP** ● **TA61622APP**
 150W Ceiling power supply kit for suspenion and ceiling modules 230VAC-48VDC **IP**20 400 x 110 x h 50 mm	○ **TA60901** ● **TA61122**	○ **TA61001** ● **TA61222**	○ **TA61001APP** ● **TA61222APP**
 240W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC **IP**20 400 x 110 x h 50 mm	○ **TA60501** ● **TA60722**	○ **TA60601** ● **TA60822**	○ **TA60601APP** ● **TA60822APP**
 150W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC **IP**20 400 x 110 x h 50 mm	○ **TA60101** ● **TA60322**	○ **TA60201** ● **TA60422**	○ **TA60201APP** ● **TA60422APP**
 320W Remote box power supply kit 230VAC-48VDC **IP**20 313 x 243 x h 57,5 mm		**TA68000**	**TA68000APP**
 240W Remote box power supply kit 230VAC-48VDC **IP**20 313 x 243 x h 57,5 mm		**TA62500**	**TA62500APP**
 240W Bare power supply **ON-OFF** 230VAC-48VDC **IP**20 (for dimmable version to be combined with "**DV1061**") 244 x 68 x h 38 mm	**TA98000**		
 150W Bare power supply **ON-OFF** 230VAC-48VDC **IP**20 (for dimmable version to be combined with "**DV1061**") 244 x 68 x h 38 mm	**TA98100**		
 **DALI / 0-10 / 1-10 / PUSH** SELV Interface 103 x 67 x h 21 mm		**DV1061**	

Optional control devices - BLL wireless switch

	Device for switching and controlling Artemide APP products. Max N.3 inputs for external push buttons. Max 1 m distance. Mains power supply required. To be installed inside flush mounting boxes or junction boxes.	**DV1080APP**

TURN AROUND SUSPENSION DIRECT TRACK

Titanium

IP20

Linear elements

Length	Code
1000 mm	**TA10122**
2000 mm	**TA10222**
3000 mm	**TA10322**






Angle elements

90° on same plane track angle elements
75 x 75 mm

Code
TA80122






Curved joining elements


Radius	Alpha	Code
300 mm	45°	**TA40022**
	60°	**TA40322**
	90°	**TA40622**
500 mm	45°	**TA40122**
	60°	**TA40422**
	90°	**TA40722**
700 mm	45°	**TA40222**
	60°	**TA40522**
	90°	**TA40822**




45°



60°






90°



Accessories

	Code
 Fed end cap Cable L= 2500 mm	**TA90600**
 Suspension kit (3pcs) Linear element L= 3000 mm uses 3pcs Linear element L= 2000 mm uses 2pcs Linear element L= 1000 mm uses 2pcs	**TA90500**
 Electro-mechanical joint kit	**TA90300**

White Titanium

Power supply	Undimmable Code	DALI / 0-10 / 1-10 / PUSH Code	Dimmable APP Code
 320W Recessed power supply kit for suspension modules 230VAC-48VDC **IP**20 ⏚ 395 x 165 x h 107 mm	**TA67001**	**TA67101**	**TA67101APP**
 240W Recessed power supply kit for suspension modules 230VAC-48VDC **IP**20 ⏚ 395 x 165 x h 107 mm	**TA62301**	**TA62401**	**TA62401APP**
 150W Recessed power supply kit for suspension modules 230VAC-48VDC **IP**20 ⏚ 395 x 165 x h 107 mm	**TA62101**	**TA62201**	**TA62201APP**
 240W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC **IP**20 ⏚ 400 x 110 x h 50 mm	○ **TA61301** ● **TA61522**	○ **TA61401** ● **TA61622**	○ **TA61401APP** ● **TA61622APP**
 150W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC **IP**20 ⏚ 400 x 110 x h 50 mm	○ **TA60901** ● **TA61122**	○ **TA61001** ● **TA61222**	○ **TA61001APP** ● **TA61222APP**
 320W Remote box power supply kit 230VAC-48VDC **IP**20 ⏚ 313 x 243 x h 57,5 mm		**TA68000**	**TA68000APP**
 240W Remote box power supply kit 230VAC-48VDC **IP**20 ⏚ 313 x 243 x h 57,5 mm		**TA62500**	**TA62500APP**
 240W Bare power supply **ON-OFF** 230VAC-48VDC **IP**20 ⏚ (for dimmable version to be combined with "**DV1061**") 244 x 68 x h 38 mm	**TA98000**		
 150W Bare power supply **ON-OFF** 230VAC-48VDC **IP**20 ⏚ (for dimmable version to be combined with "**DV1061**") 244 x 68 x h 38 mm	**TA98100**		
 **DALI / 0-10 / 1-10 / PUSH** SELV Interface 103 x 67 x h 21 mm		**DV1061**	

Optional control devices - BLL wireless switch

 Device for switching and controlling Artemide APP products. Max N.3 inputs for external push buttons. Max 1 m distance. Mains power supply required. To be installed inside flush mounting boxes or junction boxes.		**DV1080APP**

TURN AROUND SUSPENSION DIRECT+INDIRECT TRACK

Titanium

*Delivery time on demand


IP20


Linear elements	**Direct + Indirect**
Length	Code
1000 mm	**TA20122**
2000 mm	**TA20222**
3000 mm	**TA20322**





Angle elements	**Direct + Indirect**
	Code
90° on same plane track angle elements 75 x 75 mm	**TA80222**







Curved joining elements*		**Direct + Indirect**
Radius	Alpha	Code
300 mm	45°	**TA50022**
	60°	**TA50322**
	90°	**TA50622**
500 mm	45°	**TA50122**
	60°	**TA50422**
	90°	**TA50722**
700 mm	45°	**TA50222**
	60°	**TA50522**
	90°	**TA50822**




45°



60°






90°




Accessories		
		Code
	Fed end cap Cable L= 2500 mm	**TA90800**
	Suspension kit (3pcs) Linear element L= 3000 mm uses 3pcs Linear element L= 2000 mm uses 2pcs Linear element L= 1000 mm uses 2pcs	**TA90500**
	Electro-mechanical joint kit	**TA90300**

White Titanium


Power supply	Undimmable Code	DALI / 0-10 / 1-10 / PUSH Code	Dimmable APP Code
 320W Recessed power supply kit for suspension modules 230VAC-48VDC **IP**20 ⏚ 395 x 165 x h 107 mm	**TA67001**	**TA67101**	**TA67101APP**
 240W Recessed power supply kit for suspension modules 230VAC-48VDC **IP**20 ⏚ 395 x 165 x h 107 mm	**TA62301**	**TA62401**	**TA62401APP**
 150W Recessed power supply kit for suspension modules 230VAC-48VDC **IP**20 ⏚ 395 x 165 x h 107 mm	**TA62101**	**TA62201**	**TA62201APP**
 240W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC **IP**20 ⏚ 400 x 110 x h 50 mm	○ **TA61301** ● **TA61522**	○ **TA61401** ● **TA61622**	○ **TA61401APP** ● **TA61622APP**
 150W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC **IP**20 ⏚ 400 x 110 x h 50 mm	○ **TA60901** ● **TA61122**	○ **TA61001** ● **TA61222**	○ **TA61001APP** ● **TA61222APP**
 320W Remote box power supply kit 230VAC-48VDC **IP**20 ⏚ 313 x 243 x h 57,5 mm		**TA68000**	**TA68000APP**
 240W Remote box power supply kit 230VAC-48VDC **IP**20 ⏚ 313 x 243 x h 57,5 mm		**TA62500**	**TA62500APP**
 240W Bare power supply **ON-OFF** 230VAC-48VDC **IP**20 ⏚ (for dimmable version to be combined with "**DV1061**") 244 x 68 x h 38 mm	**TA98000**		
 150W Bare power supply **ON-OFF** 230VAC-48VDC **IP**20 ⏚ (for dimmable version to be combined with "**DV1061**") 244 x 68 x h 38 mm	**TA98100**		
 **DALI / 0-10 / 1-10 / PUSH** SELV Interface 103 x 67 x h 21 mm		**DV1061**	

Optional control devices - BLL wireless switch

 Device for switching and controlling Artemide APP products. Max N.3 inputs for external push buttons. Max 1 m distance. Mains power supply required. To be installed inside flush mounting boxes or junction boxes.		**DV1080APP**

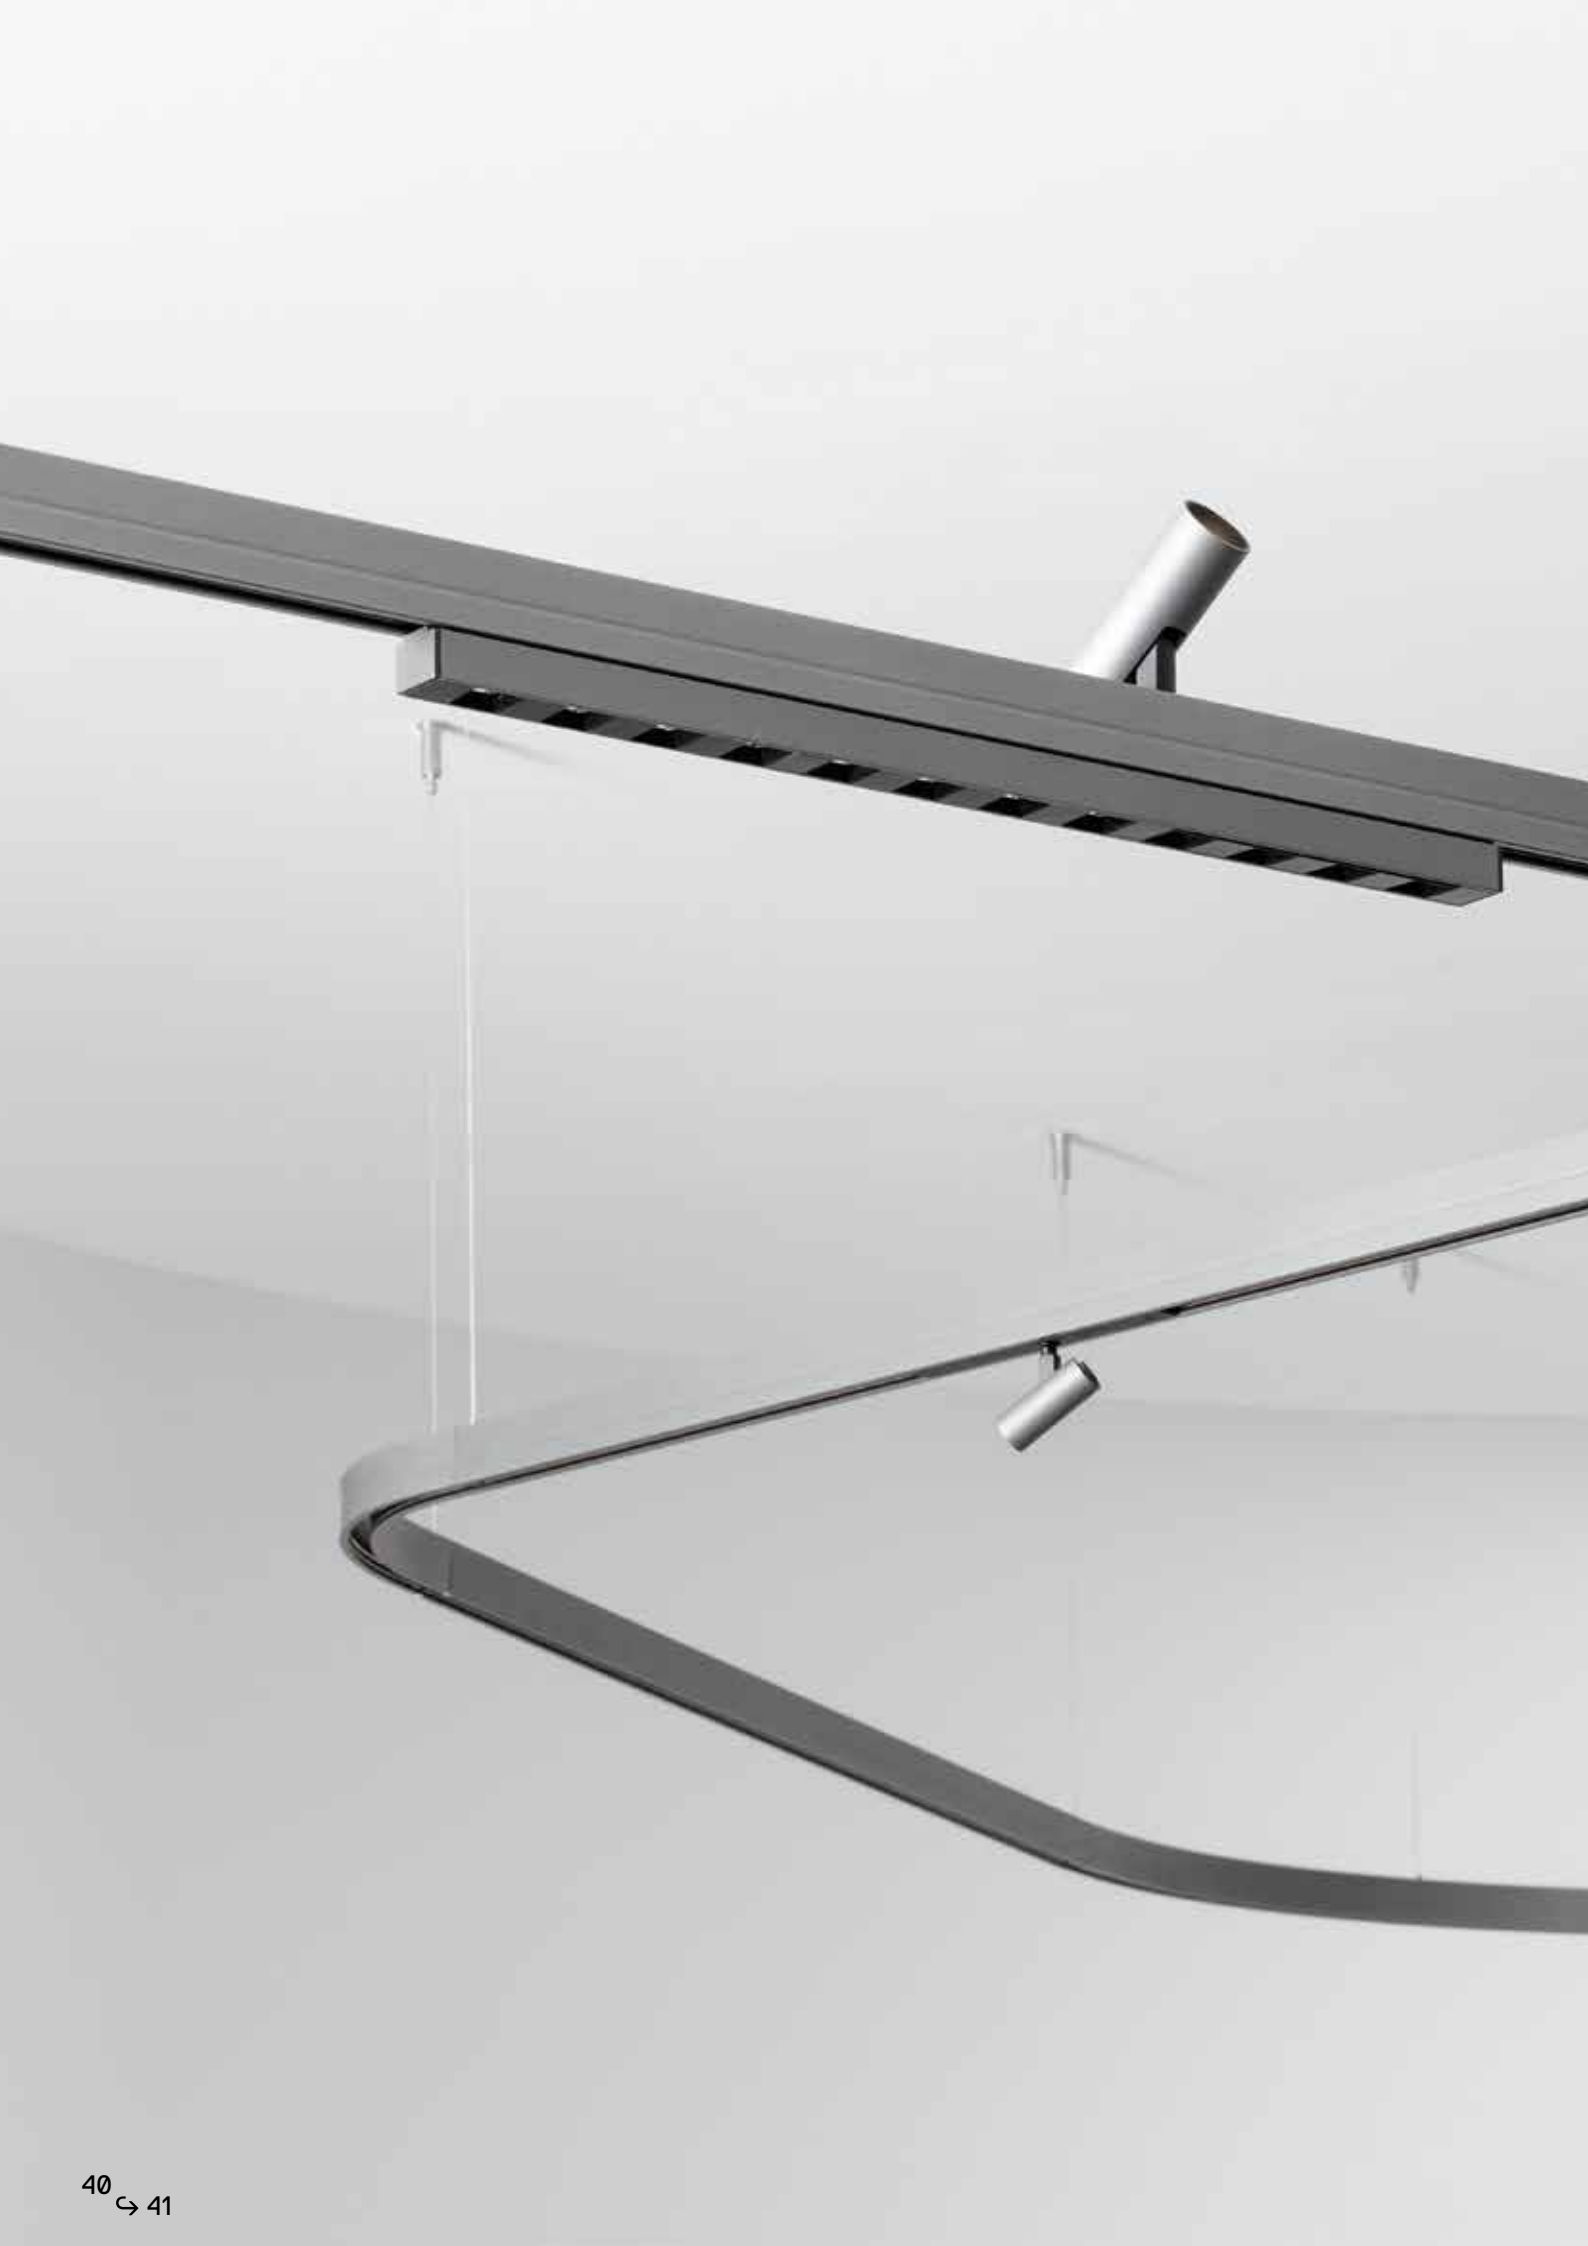




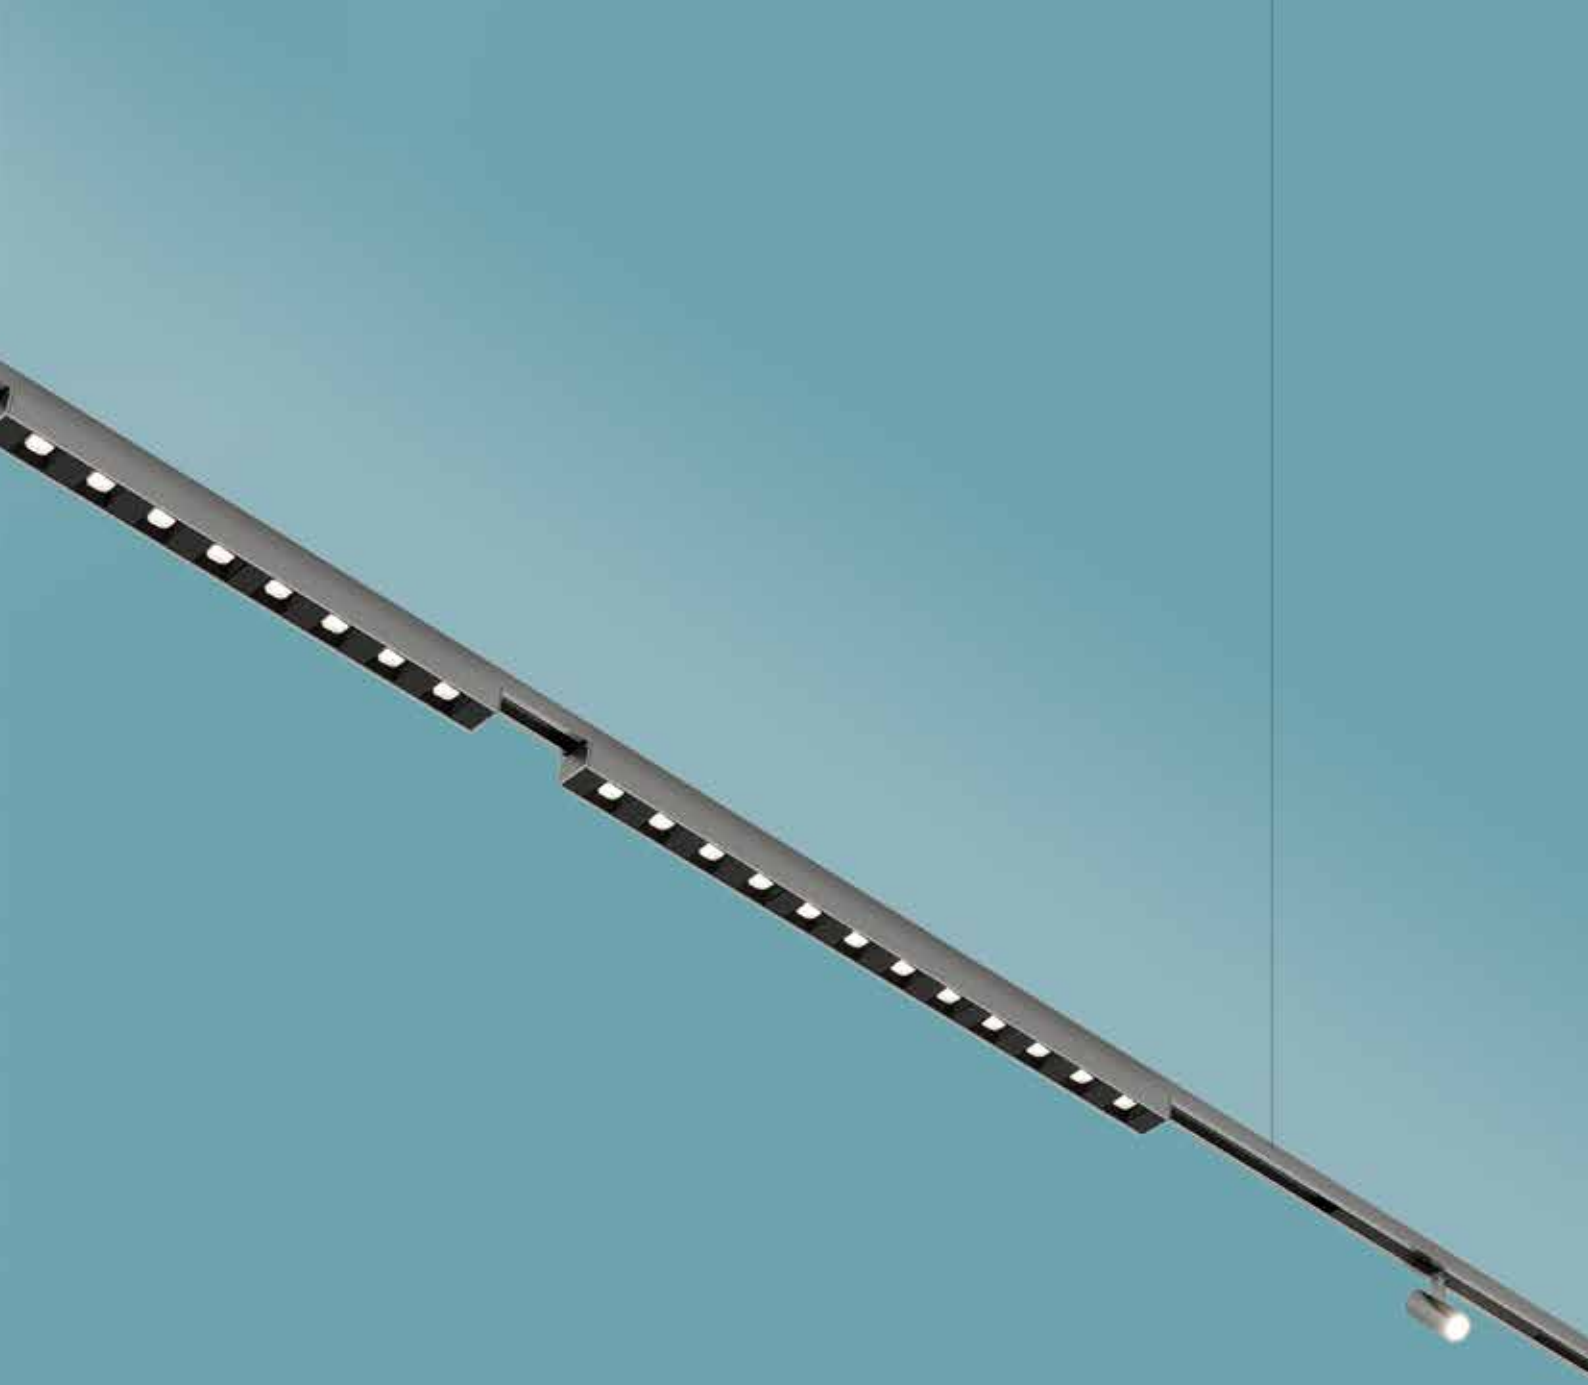

Turn Around lighting appliances



Vector
Turn Around

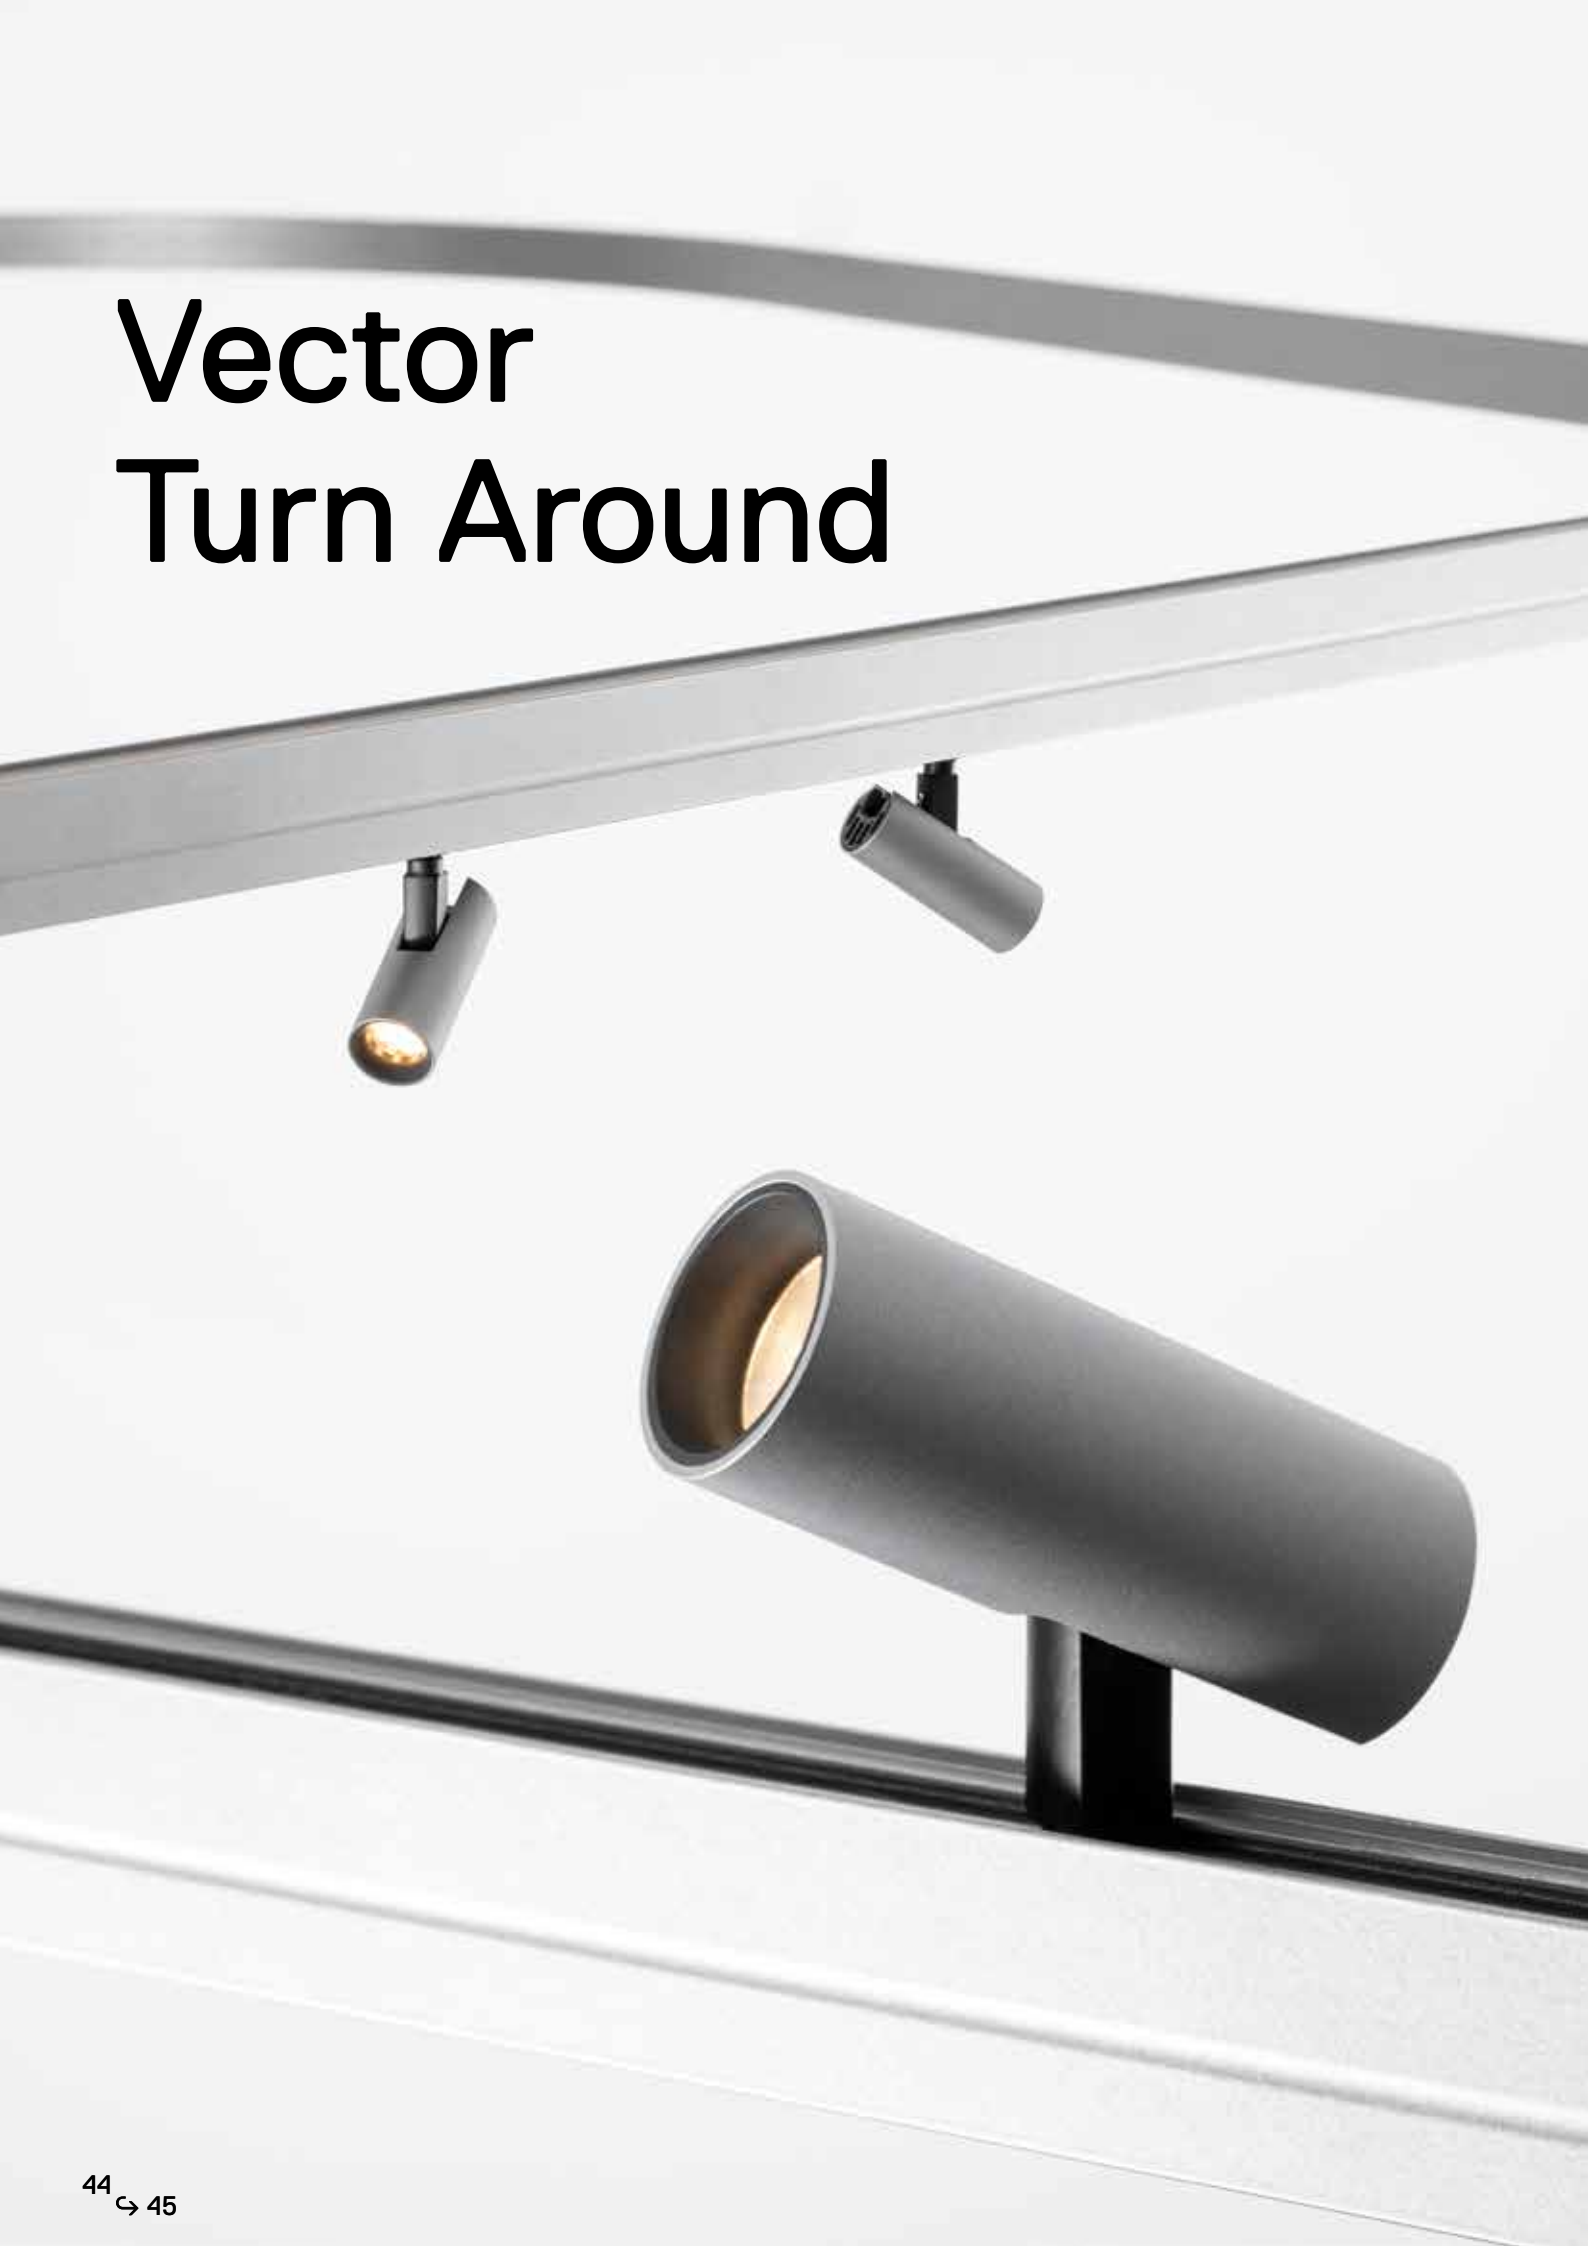

VECTOR TURN AROUND

Titanium

SP XF WF

MacAdam 3SDCM
CRI = 90


IP20
90°
360°

Vector 20

W	Beam	Flux	CCT	Dimmable** Code
3,5W	SP 16°	179 lm	2700K	**TB00122**
		188 lm	3000K	**TB01122**
3W		184 lm	4000K	**TB03122**
3,5W	XF 23°	171 lm	2700K	**TB00222**
		180 lm	3000K	**TB01222**
		189 lm	4000K	**TB03222**
	WF 35°	168 lm	2700K	**TB00322**
		177 lm	3000K	**TB01322**
		186 lm	4000K	**TB03322**



Life L90 (6K) > 36300h




Vector 30

W	Beam	Flux	CCT	Dimmable** Code
6,5W	SP 12°	329 lm	2700K	**TB10122**
		329 lm	3000K	**TB11122**
		329 lm	4000K	**TB13122**
7W	XF 16°	335 lm	2700K	**TB10222**
		335 lm	3000K	**TB11222**
		335 lm	4000K	**TB13222**
	WF 30°	292 lm	2700K	**TB10322**
		292 lm	3000K	**TB11322**
		292 lm	4000K	**TB13322**



Life L70 (18K) > 109000h



** Use of Artemide power units is mandatory



VECTOR TURN AROUND

Titanium

SP XF WF


MacAdam 3SDCM
*MacAdam 2SDCM
CRI = 90

IP20
90°
360°

Vector 40				**Dimmable****
W	Beam	Flux	CCT	Code
10W	SP 14°	544 lm	2700K	**TB20122**
		541 lm	3000K	**TB21122**
		541 lm	4000K	**TB23122**
	*XF 21°	543 lm	2700K	**TB20222**
		584 lm	3000K	**TB21222**
		626 lm	4000K	**TB23222**
	*WF 28°	491 lm	2700K	**TB20322**
		529 lm	3000K	**TB21322**
		566 lm	4000K	**TB23322**



Life L90 (10K) 60500h



Accessories	**Vector 40**
	Code
Accessories holder	**AP90100**
Lens for elliptical emission	**AP90200**
Soft filter	**AP90300**
	Code
Anti-dazzle louvre	**AP90400**

** Use of Artemide power units is mandatory



VECTOR PENDANT TURN AROUND

Titanium

SP XF WF


MacAdam 3SDCM
* MacAdam 2SDCM
CRI = 90

IP20

Vector 30 Pendant				**Dimmable****
W	Beam	Flux	CCT	Code
6,5W	SP 12°	329 lm	2700K	**TB30122**
		329 lm	3000K	**TB31122**
		329 lm	4000K	**TB33122**
7W	XF 16°	335 lm	2700K	**TB30222**
		335 lm	3000K	**TB31222**
		335 lm	4000K	**TB33222**
	WF 30°	292 lm	2700K	**TB30322**
		292 lm	3000K	**TB31322**
		292 lm	4000K	**TB33322**




Life L70 (24K) 145000h




Vector 40 Pendant				**Dimmable****
W	Beam	Flux	CCT	Code
10W	SP 14°	544 lm	2700K	**TB40122**
		541 lm	3000K	**TB41122**
		541 lm	4000K	**TB43122**
	*XF 21°	543 lm	2700K	**TB40222**
		584 lm	3000K	**TB41222**
		626 lm	4000K	**TB43222**
	*WF 28°	491 lm	2700K	**TB40322**
		529 lm	3000K	**TB41322**
		566 lm	4000K	**TB43322**



Life L90 (10K) 60500h





No cuttable wire
Clips included to adjust the length

** Use of Artemide power units is mandatory

Sharp
Turn Around



SHARP TURN AROUND

Titanium

XF WF


MacAdam 2SDCM
*MacAdam 3SDCM
CRI = 90
Life L70 (18K) 109000h

IP20

Sharp 8


	W	Beam	Flux	CCT	Dimmable Code
8 LED	14W	XF 26°	1071 lm*	2700K	**TB50222**
			1071 lm	3000K	**TB51222**
			1147 lm	4000K	**TB53222**
		XF 62°	1139 lm*	2700K	**TB50422**
			1139 lm	3000K	**TB51422**
			1219 lm	4000K	**TB53422**







Sharp 12

	W	Beam	Flux	CCT	Dimmable Code
12 LED	19W	XF 26°	1607 lm*	2700K	**TB60222**
			1607 lm	3000K	**TB61222**
			1720 lm	4000K	**TB63222**
		XF 62°	1708 lm*	2700K	**TB60422**
			1708 lm	3000K	**TB61422**
			1829 lm	4000K	**TB63422**



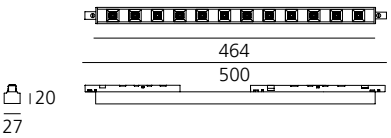

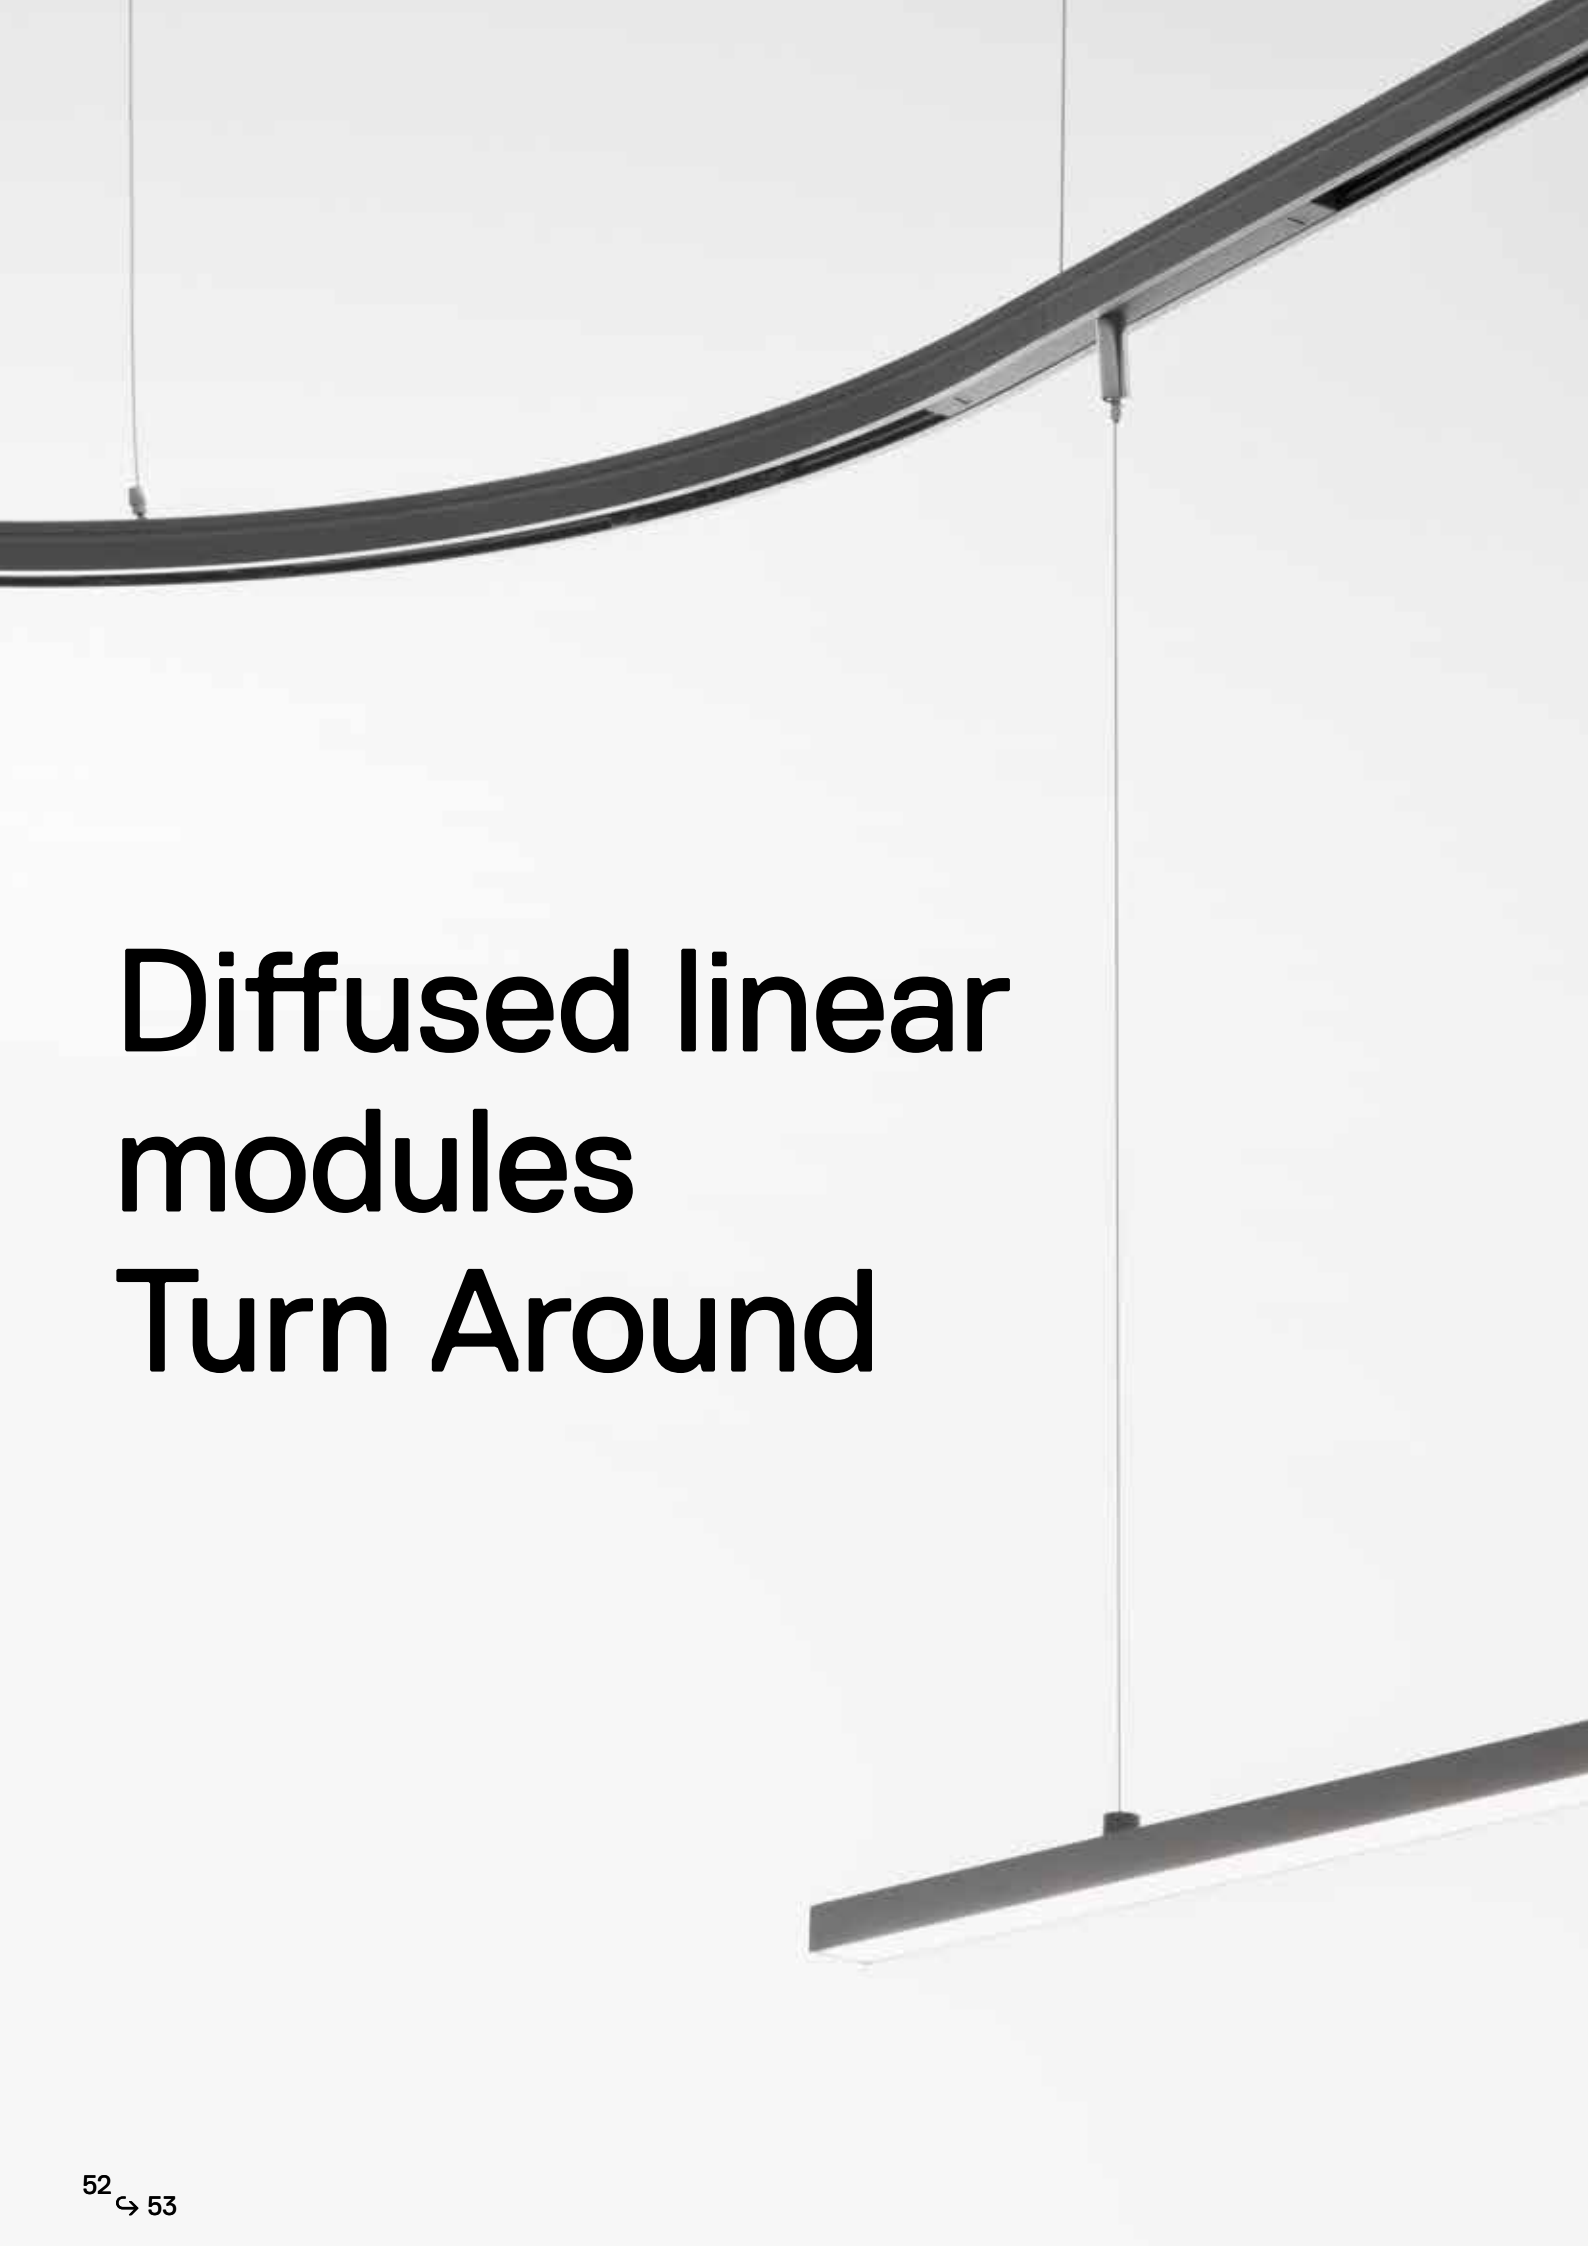

Diffused linear modules Turn Around

DIFFUSED LINEAR MODULES TURN AROUND

Titanium


MacAdam 3SDCM
CRI = 90


IP20

Diffused linear module				**Dimmable**
	W	Flux	CCT	Code
600 mm	15W	1340 lm	2700K	**TD21022**
		1421 lm	3000K	**TD22022**
		1421 lm	4000K	**TD24022**
1200 mm	30W	2510 lm	2700K	**TD31022**
		2843 lm	3000K	**TD32022**
		2748 lm	4000K	**TD34022**



Life L70 (18K) 102000h



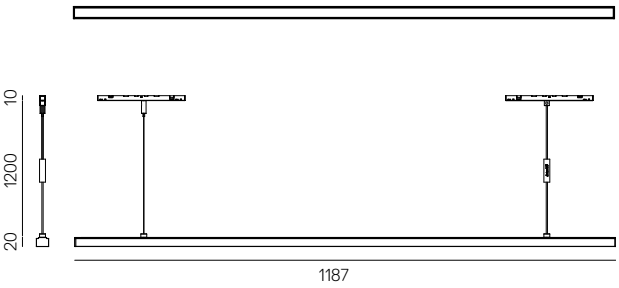



No cuttable wire
Clips included to adjust the length



Diffused flexible modules Turn Around


DIFFUSED LINEAR MODULES TURN AROUND

Titanium

MacAdam 3SDCM
CRI = 90

IP20

Diffused flexible modules*				**Dimmable**
	W	Flux	CCT	Code
2000 mm	18W	1000 lm	3000K	**TB91922**
4500 mm	39W	2252 lm	3000K	**TB90922**



* The adapter of the diffused flexible module can be fixed only in linear module

Square modules
Turn Around



DIFFUSED LINEAR MODULES TURN AROUND


Titanium

MacAdam 3SDCM
CRI = 90
Life L70 (6K) 36000h

IP20


Horizontal square diffused			**Dimmable**
W	Flux	CCT	Code
18W	1001 lm	3000K	**TB81922**






Vertical square diffused			**Dimmable**
W	Flux	CCT	Code
18W	1001 lm	3000K	**TB71922**






Horizontal square track*	
	Code
	TB99922





***Insets horizontal square track**



Insets	**N° Max**
Vector 20	3
Vector 30	3
Vector 40	3
Vector 30 Pendant Track	3
Vector 40 Pendant Track	3
Sharp 8x	3





Wall Washer
Turn Around



WALL WASHER TURN AROUND


Titanium

MacAdam 3SDCM
Life L70 (6K) 50000h
CRI = 90

IP20

Length	W	Flux	CCT	Code
600 mm	11W	888 lm	3000K	**WW02122**
		950 lm	4000K	**WW03122**
1200 mm	22W	1776 lm	3000K	**WW06222**
		1900 lm	4000K	**WW07222**



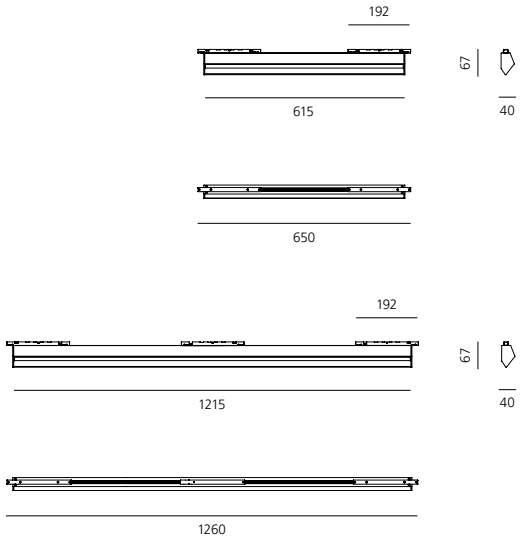



Turn Around is inclusive





LIGHTING APPLIANCES TURN AROUND

Black White

SP XF WF

MacAdam 2SDCM*
MacAdam 3SDCM
CRI = 90
Delivery time on demand
2700K - 4000K


IP20

GOPLE MINI PENDANT TURN AROUND, BIG - BJARKE INGELS GROUP

W	Flux	CCT	Dimmable Code
9W	836 lm	2700K	**TC10401**
	850 lm	3000K	**TC11401**



Life L70 (9K) 50000h

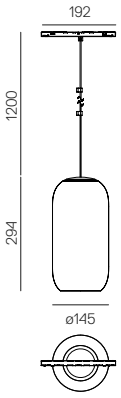


GOPLE 60 PENDANT TURN AROUND, BIG - BJARKE INGELS GROUP

W	Colour	Beam	Flux	CCT	Dimmable Code
10W	Black	SP 13°	557 lm	2700K	**TC50104**
			557 lm	3000K	**TC51104**
			557 lm	4000K	**TC53104**
		XF 20°*	556 lm	2700K	**TC50204**
			598 lm	3000K	**TC51204**
			641 lm	4000K	**TC53204**
		WF 28°*	503 lm	2700K	**TC50304**
			542 lm	3000K	**TC51304**
			580 lm	4000K	**TC53304**



Life L70 (24K) 145000h

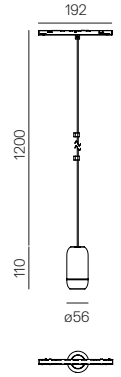



GOPLE 80 PENDANT TURN AROUND, BIG - BJARKE INGELS GROUP

W	Colour	Beam	Flux	CCT	Dimmable Code
19W	Black	SP 16°	1739 lm	2700K	**TC40104**
			1779 lm	3000K	**TC41104**
			1845 lm	4000K	**TC43104**
		XF 22°	1837 lm	2700K	**TC40204**
			1879 lm	3000K	**TC41204**
			1949 lm	4000K	**TC43204**
		WF 32°	1986 lm	2700K	**TC40304**
			2031 lm	3000K	**TC41304**
			2107 lm	4000K	**TC43304**



Life L70 (9K) 50000h

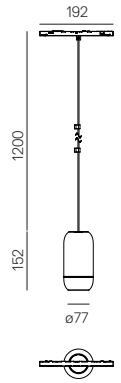



No cuttable wire
Clips included to adjust the length



LIGHTING APPLIANCES TURN AROUND

White

MacAdam 2SDCM
CRI = 90
Life L70 (24K) 145000h


IP20

SPHERE 9 PENDANT TURN AROUND

W	Flux	CCT	**Dimmable** Code
4W	346 lm	2700K	**TC30406**
	373 lm	3000K	**TC31406**



Life L70 (11K) 61000h

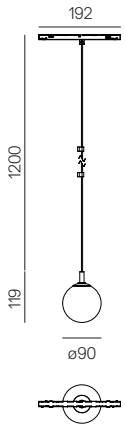



SPHERE 14 PENDANT TURN AROUND

W	Flux	CCT	**Dimmable** Code
8,5W	628 lm	2700K	**TC20406**
	677 lm	3000K	**TC21406**



Life L70 (19K) 105000h

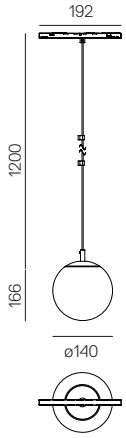



No cuttable wire
Clips included to adjust the length



LIGHTING APPLIANCES TURN AROUND

Aluminium Brass

MacAdam 2SDCM
CRI = 90


IP20

ORSA 21 PENDANT TURN AROUND, FOSTER + PARTNERS INDUSTRIAL DESIGN

W	Flux	CCT	**Dimmable** Code
8W	525 lm	2700K	**TC60404**
	562 lm	3000K	**TC61404**



Life L70 (9K) 50000h

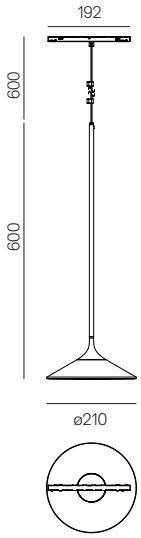



UNTERLINDEN PENDANT TURN AROUND, HERZOG & DE MEURON

W	Colour	Flux	CCT	**Dimmable** Code
7W	Brass	339 lm	2700K	**TC70406**
	Aluminum			**TC70407**
	Brass	349 lm	3000K	**TC71406**
	Aluminum			**TC71407**



Life L70 (19K) 105000h





No cuttable wire
Clips included to adjust the length



LIGHTING APPLIANCES TURN AROUND

Black

MacAdam 3SDCM
CRI = 90


IP20


DISCOVERY 70 VERTICAL PENDANT TURN AROUND, ERNESTO GISMONDI

W	Colour	Flux	CCT	**Dimmable** Code
29W	Black	2317 lm	3000K	**TC01404**




Life L70 (9K) 50000h

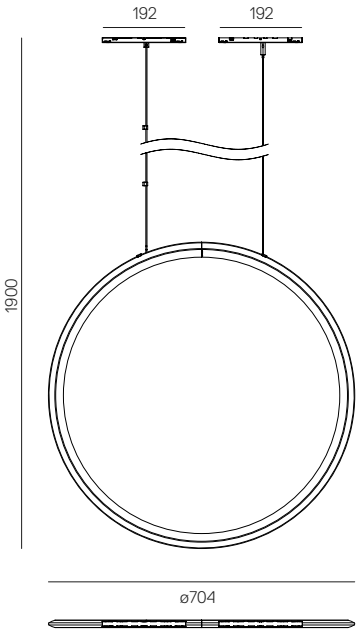



No cuttable wire
Clips included to adjust the length

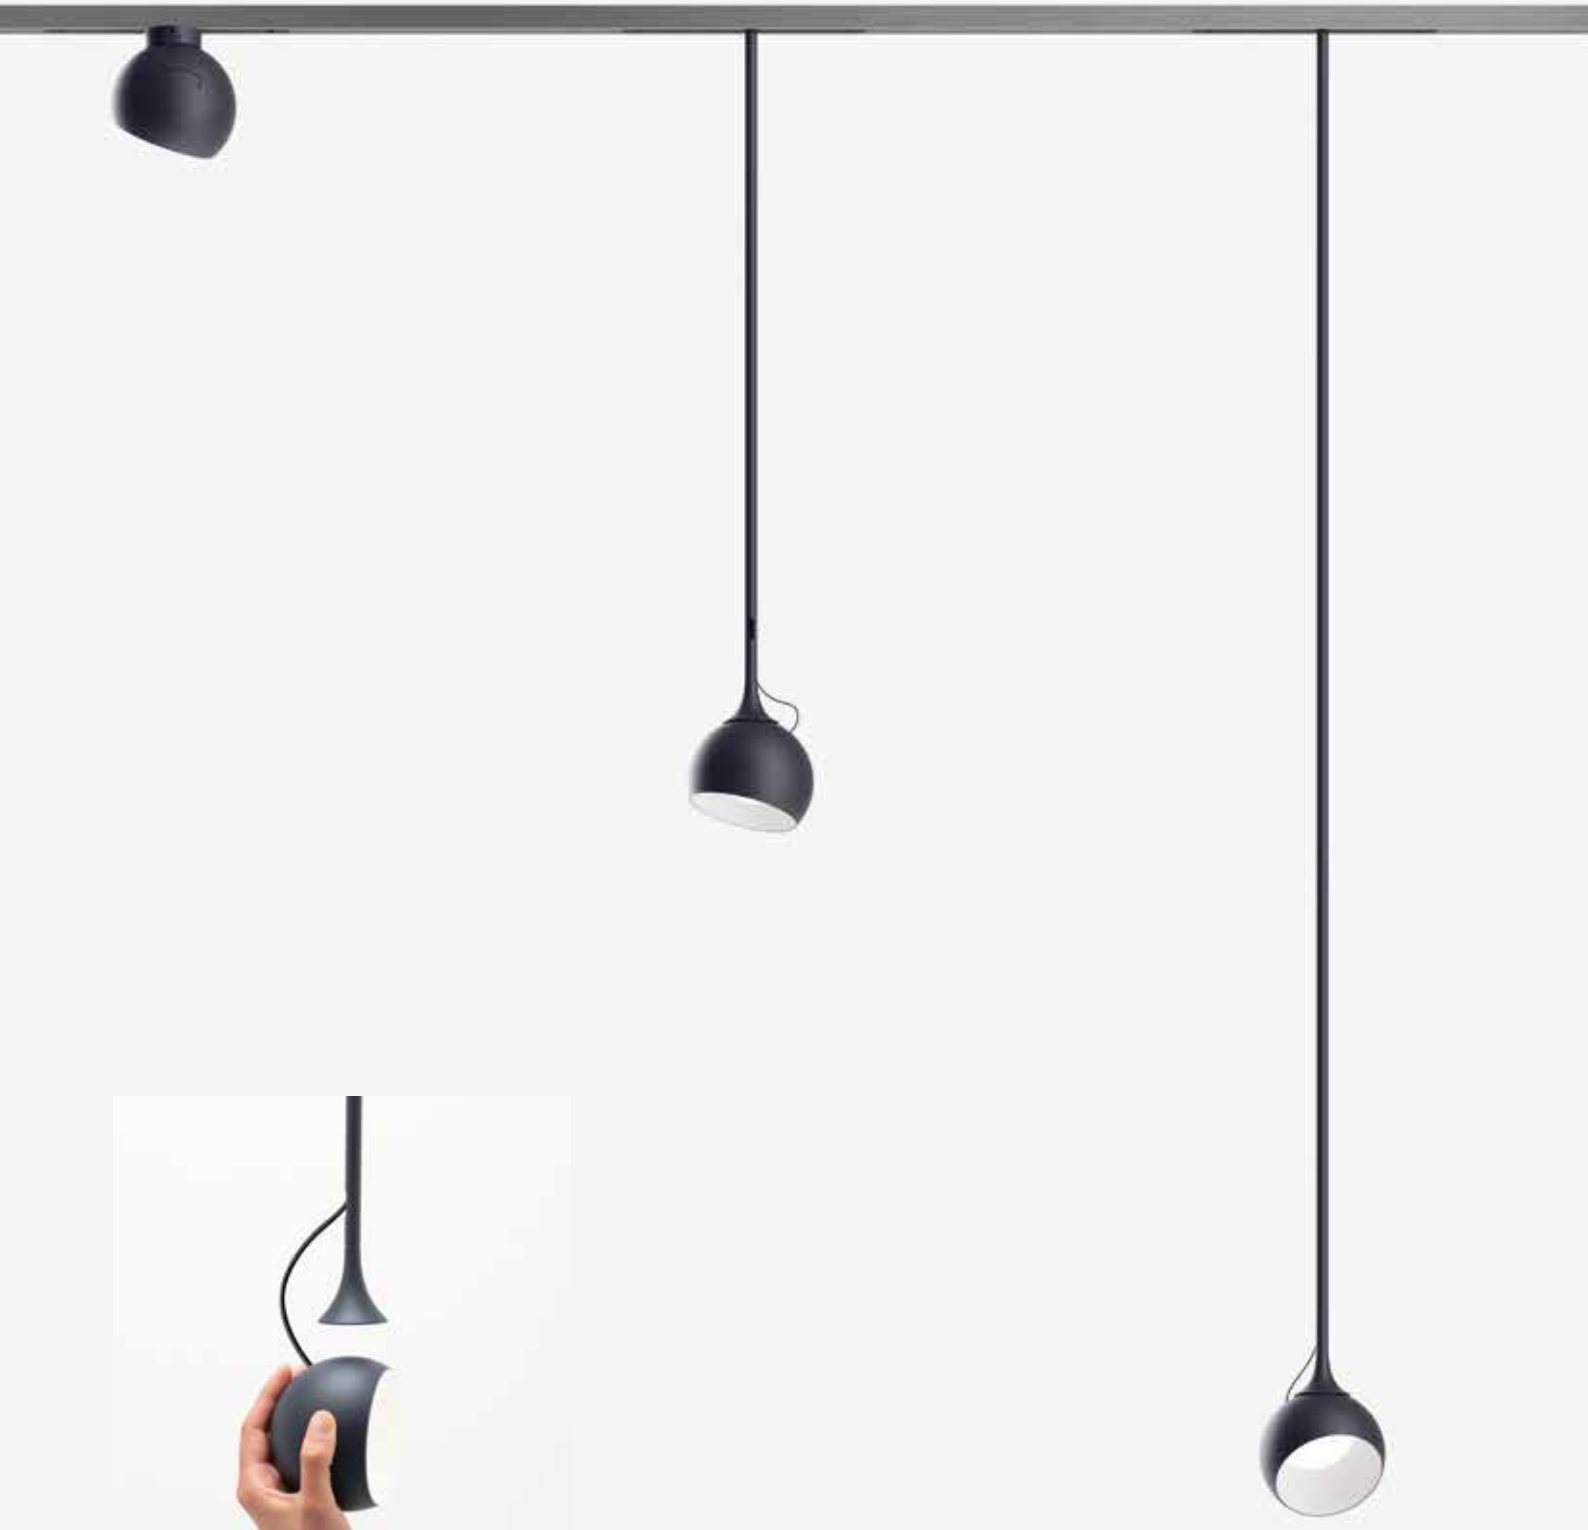

LIGHTING APPLIANCES TURN AROUND


Anthracite	Blue	White/ Grey	Yellow
04	**07**	**01**	**06**


MacAdam 2SDCM
CRI = 90
Life L70 (10K) 60500h

IP20

IXA SPOT TURN AROUND, FOSTER + PARTNERS INDUSTRIAL DESIGN


W	Flux	CCT	Color	**Dimmable** Code
9W	465 lm	3000K	Anthracite	**TC81004**
			Blue	**TC81007**
			White / Grey	**TC81001**
			Yellow	**TC81006**






IXA 50 TURN AROUND, FOSTER + PARTNERS INDUSTRIAL DESIGN

W	Flux	CCT	Color	**Dimmable** Code
9W	465 lm	3000K	Anthracite	**TC81104**
			Blue	**TC81107**
			White / Grey	**TC81101**
			Yellow	**TC81106**






IXA 100 TURN AROUND, FOSTER + PARTNERS INDUSTRIAL DESIGN

W	Flux	CCT	Color	**Dimmable** Code
9W	465 lm	3000K	Anthracite	**TC81204**
			Blue	**TC81207**
			White / Grey	**TC81201**
			Yellow	**TC81206**











Museo Egizio, Torino, Italy, ph. Michele Nastasi



Museo Egizio, Torino, Italy, ph. Michele Nastasi



Reire, Reggio Emilia, Italy, ph. Michele Nastasi

Reire, Reggio Emilia, Italy, ph. Michele Nastasi



Olmo Restaurant, Cornaredo, Italy, ph. Michele Nastasi





Olmo Restaurant, Cornaredo, Italy, ph. Michele Nastasi



Ciesse Piumini Store, Milan, Italy, ph. Federico Motta

Ciesse Piumini Store, Milan, Italy, ph. Federico Motta

Turn Around floor

Carlotta de Bevilacqua
2023

Turn Around floor shares the same design principles of Turn Around system starting from parameters of sustainability, reduction, lightness, optoelectronic intelligence and interaction. Like the system it is perfect for a last-minute choice able to add dynamic light quality to the space.

The slender and minimal structure integrates two different lighting performances to meet the needs of any space, from office workstations to meeting rooms, hospitality or residential spaces.

Turn Around floor combines to the direct controlled emission also an indirect diffuse emission which can be managed separately both from the luminaire body.


The high efficiency and the flexibility of emissions management make Turn Around floor an optimal solution for intelligent energy saving that enhances the experience and the awareness of the user.




For further information on Turn Around floor
visit artemide.com




Refractive emission

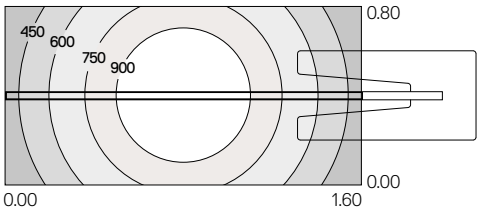

Refractive direct
Head h 2015 mm - Desk h 750 mm
E_{av}= 708 lx u_0= 0,444

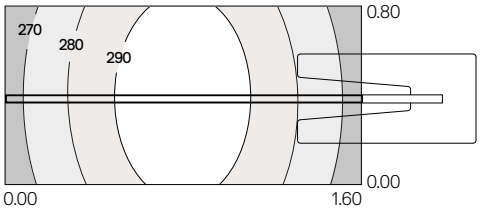

Diffused indirect
Head h 2015 mm - Desk h 750 mm
E_{av}= 281 lx u_0= 0,942

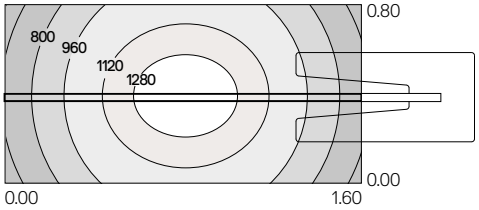

Refractive Direct + Diffused indirect
Head h 2015 mm - Desk h 750 mm
E_{av}= 989 lx u_0= 0,584

High Efficiency
more than 70%

High Efficacy
up to 115 lm/W

High Glare Control
UGR<16

CRI = 90

Lighting calculation parameters used for Isolux diagrams: office with a single workstation.
Length x width x height: 5.00 x 5.00 x 2.70 m
Reflection factor ceiling / wall / floor: 70 / 50 / 20 %
Desk: 1.60 x 0.80 x 0.75 m
Maintenance factor: 0.90 WF

Capacitive board for light management

Indirect emission
On / Off
Dimming

Direct + Indirect emission
On / Off
Intensity setting

Direct emission
On / Off
Dimming

Sensor

Intensity setting and daylight
PIR (proximity)





Workplace

1 - Direct and indirect emission
2 - Direct emission
3 - Indirect emission








TURN AROUND FLOOR


Titanium


MacAdam 3SDCM **IP**20
CRI = 90
Life L70 (17k) 102000h

Turn Around floor, direct + indirect emission				**Dimmable**	**Dimmable + sensor***
Weight	W	Flux	CCT	Code	Code
20 Kg	17W direct	1824 lm	3000K	**TE22022**	**TE22122**
	53W indirect	6197 lm	3000K		
		1824 lm	4000K	**TE23022**	**TE23122**
		6197 lm	4000K		

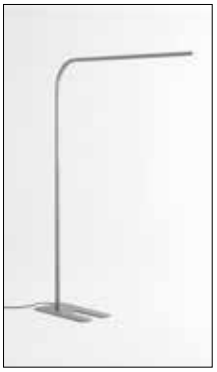


*Sensor functionalities:
- Intensity setting and daylight (touching for 3 seconds the central part of the controller)
- PIR (proximity)

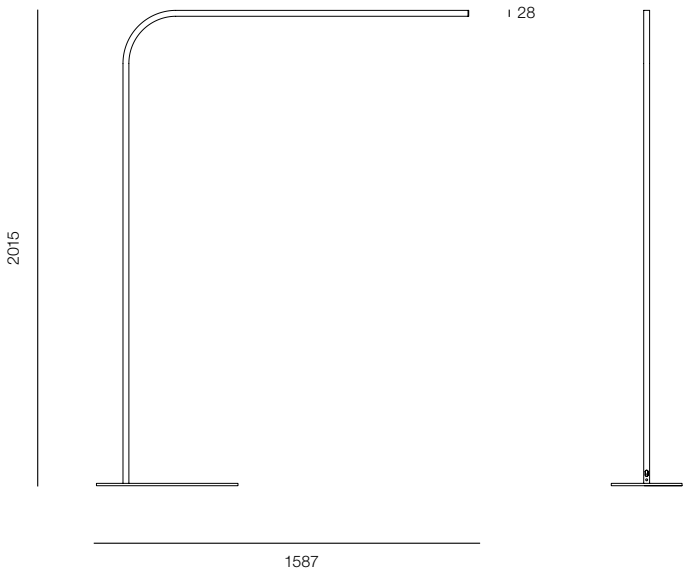

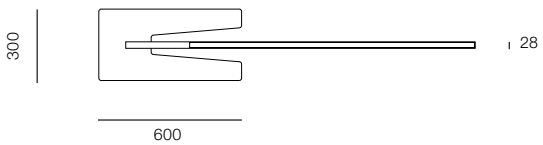






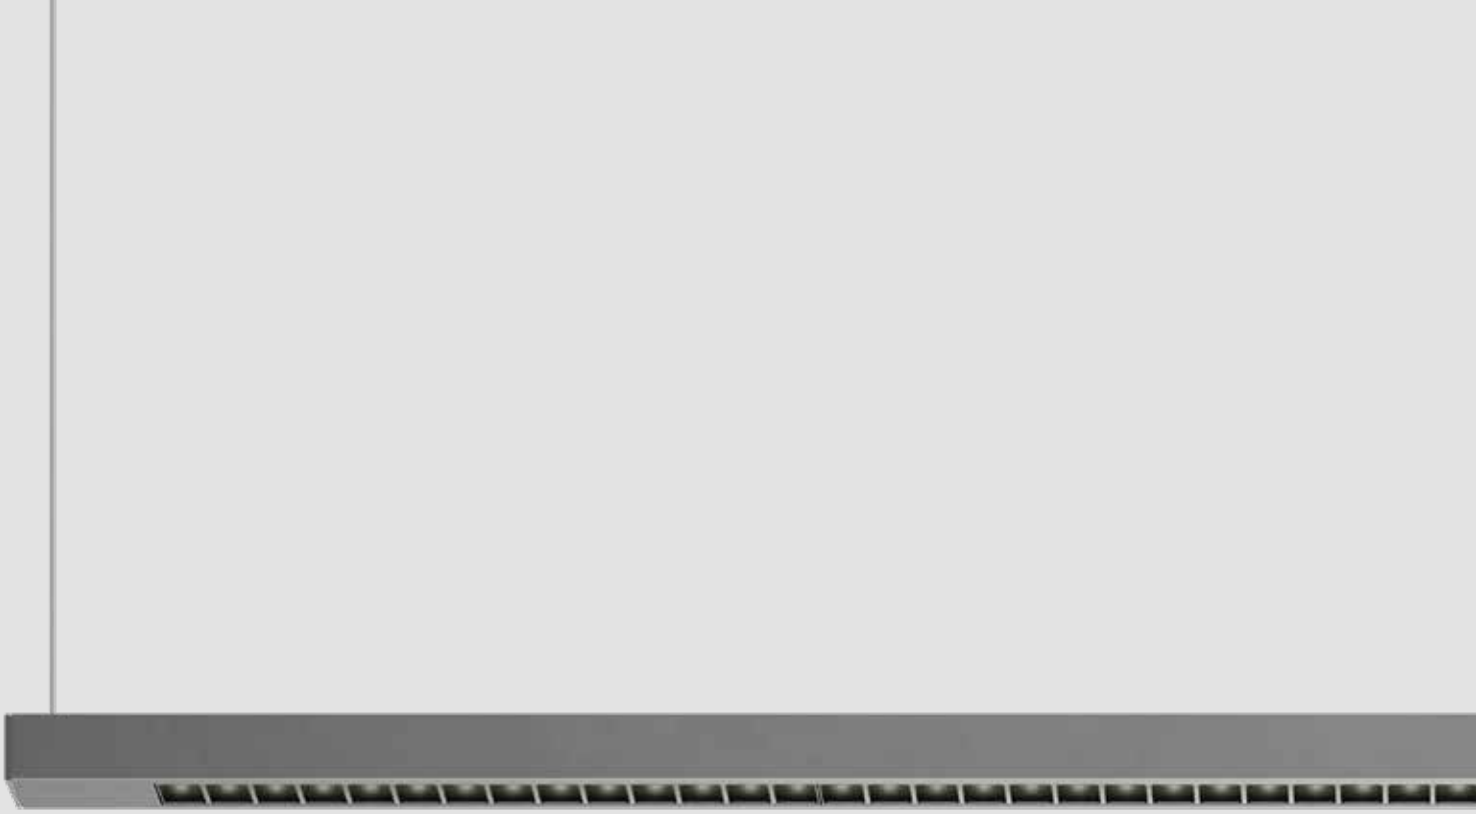

Turn Around suspension

Carlotta de Bevilacqua
2024

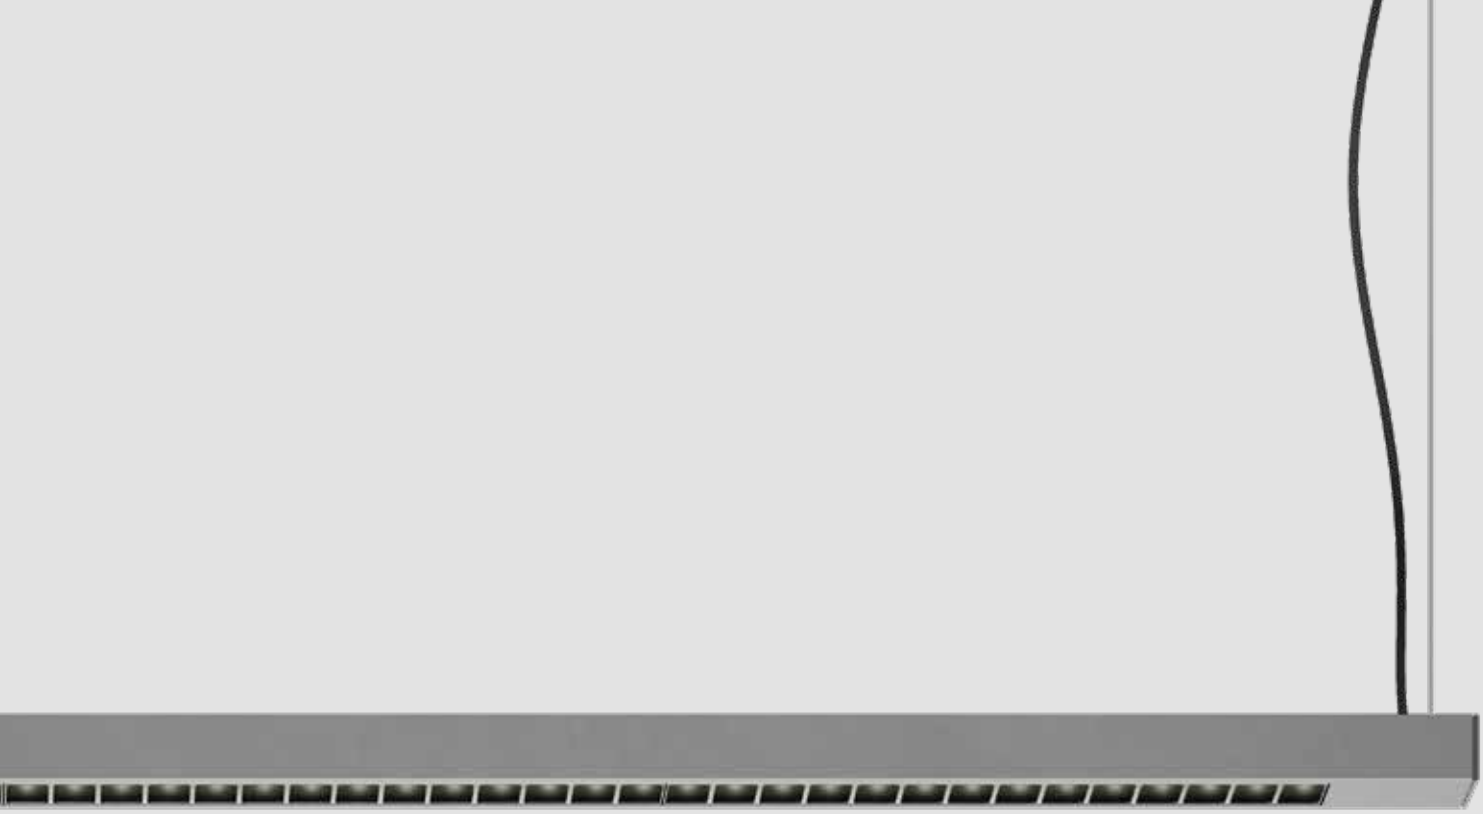

Turn Around suspension shares the same design principles of Turn Around system starting from parameters of sustainability, reduction, lightness, integration, optoelectronic intelligence, application freedom and interaction.

It also shares the same components of Turn Around floor, integrating in the minimal structure two different lighting performances.

Turn Around suspension combines a direct controlled emission to an indirect diffused emission manageable together.

The high efficiency and the perfect control of the lighting emission make Turn Around suspension an optimal solution for workplaces.



Refractive emission

High Efficiency
more than 70%

High Efficacy
up to 115 lm/W

High Glare Control
UGR<16

CRI = 90


Diffused indirect emission



Combined management

Direct and Indirect emission
DALI / Push




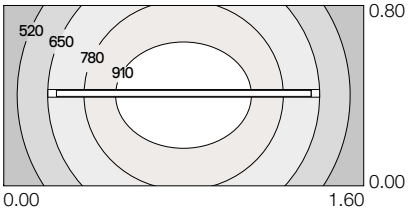

Refractive Direct + Diffused indirect
Head h 2100 mm - Desk h 750 mm
E_{av} = 732 lx u_0= 0,526
Power: 17W Direct + 17W Indirect
Flux: 1940 lm + 7500 lm (3000K)

Lighting calculation parameters used for Isolux diagrams:
Office with a single workstation.
Length x width x height: 5.00 x 5.00 x 2.70 m
Reflection factor ceiling / wall / floor: 70 / 50 / 20%
Desk: 1.60 x 0.80 x 0.75 m
Maintenance factor: 0.90 WF

Turn Around suspension

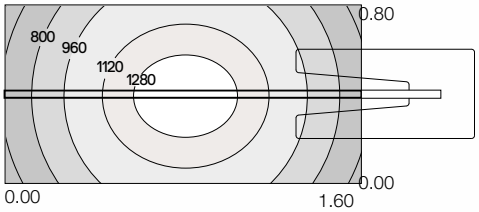

Refractive Direct + Diffused indirect
Head h 2015 mm - Desk h 750 mm
E_{av}= 989 lx u_0= 0,584
Power: 17W Direct + 52W Indirect
Flux: 1940 lm + 2700 lm (3000K)

Lighting calculation parameters used for Isolux diagrams:
Office with a single workstation.
Length x width x height: 5.00 x 5.00 x 2.70 m
Reflection factor ceiling / wall / floor: 70 / 50 / 20%
Desk: 1.60 x 0.80 x 0.75 m
Maintenance factor: 0.90 WF

Turn Around floor




TURN AROUND SUSPENSION


Titanium

MacAdam 3SDCM
CRI = 90
Life L70 (17K) 102000h

IP20

Turn Around suspension, direct + indirect emission			**Dimmable DALI/Push**
W	Flux	CCT	Code
17W direct 17W indirect	1724 lm 2640 lm	2700K	**TF21022**
	1830 lm 2818 lm	3000K	**TF22022**
	1940 lm 2700 lm	4000K	**TF23022**



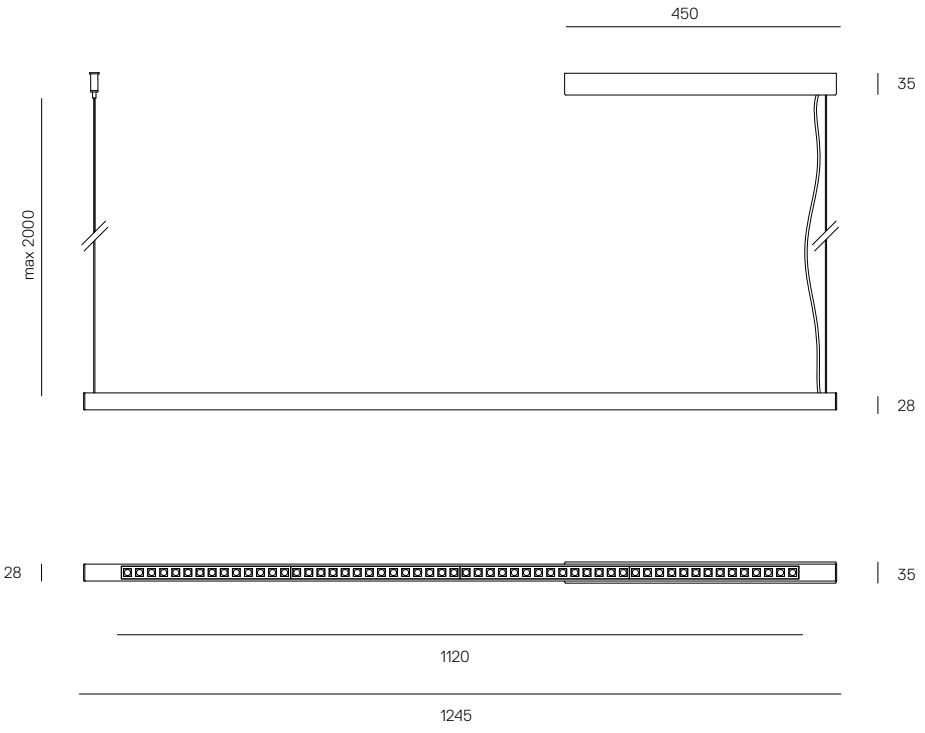





Artemide®

Headquarters

Artemide S.p.A.
Via Bergamo, 18
20010 Pregnana Milanese (MI), Italy
Tel. +39 02 93518.1
Tel. +39 02 93526.1
Numero verde 800 834 093
(from Italy only)
info@artemide.com
artemide.com

Artemide S.p.A.
si riserva la facoltà di modificare, in qualunque momento e senza preavviso, le caratteristiche tecniche degli elementi illustrati nel presente catalogo.

Artemide S.p.A.
reserves the right to change, at any time and without prior warning, the technical specifications of any product illustrated in this catalogue.

Artemide S.p.A.
se réserve le droit de modifier, à n'importe quel moment et sans préavis, les caractéristiques techniques des éléments illustrés dans ce catalogue.

Artemide S.p.A.
behält sich das Recht vor jederzeit und ohne Ankündigung die technischen Daten der im Katalog abgebildetem Produkte zu ändern.

Artemide S.p.A.
se reserva la facultad de modificar, en cualquier y sin aviso previo, las características técnicas de los elementos ilustrados en el presente catálgo.

V.2 2026

For information regarding distributors and points of sale, please visit our website artemide.com or email: info@artemide.com

FSC www.fsc.org
MIX
Paper | Supporting responsible forestry
FSC® C019238