
Alphabet of light
Gople system

BIG - Bjarke Ingels Group

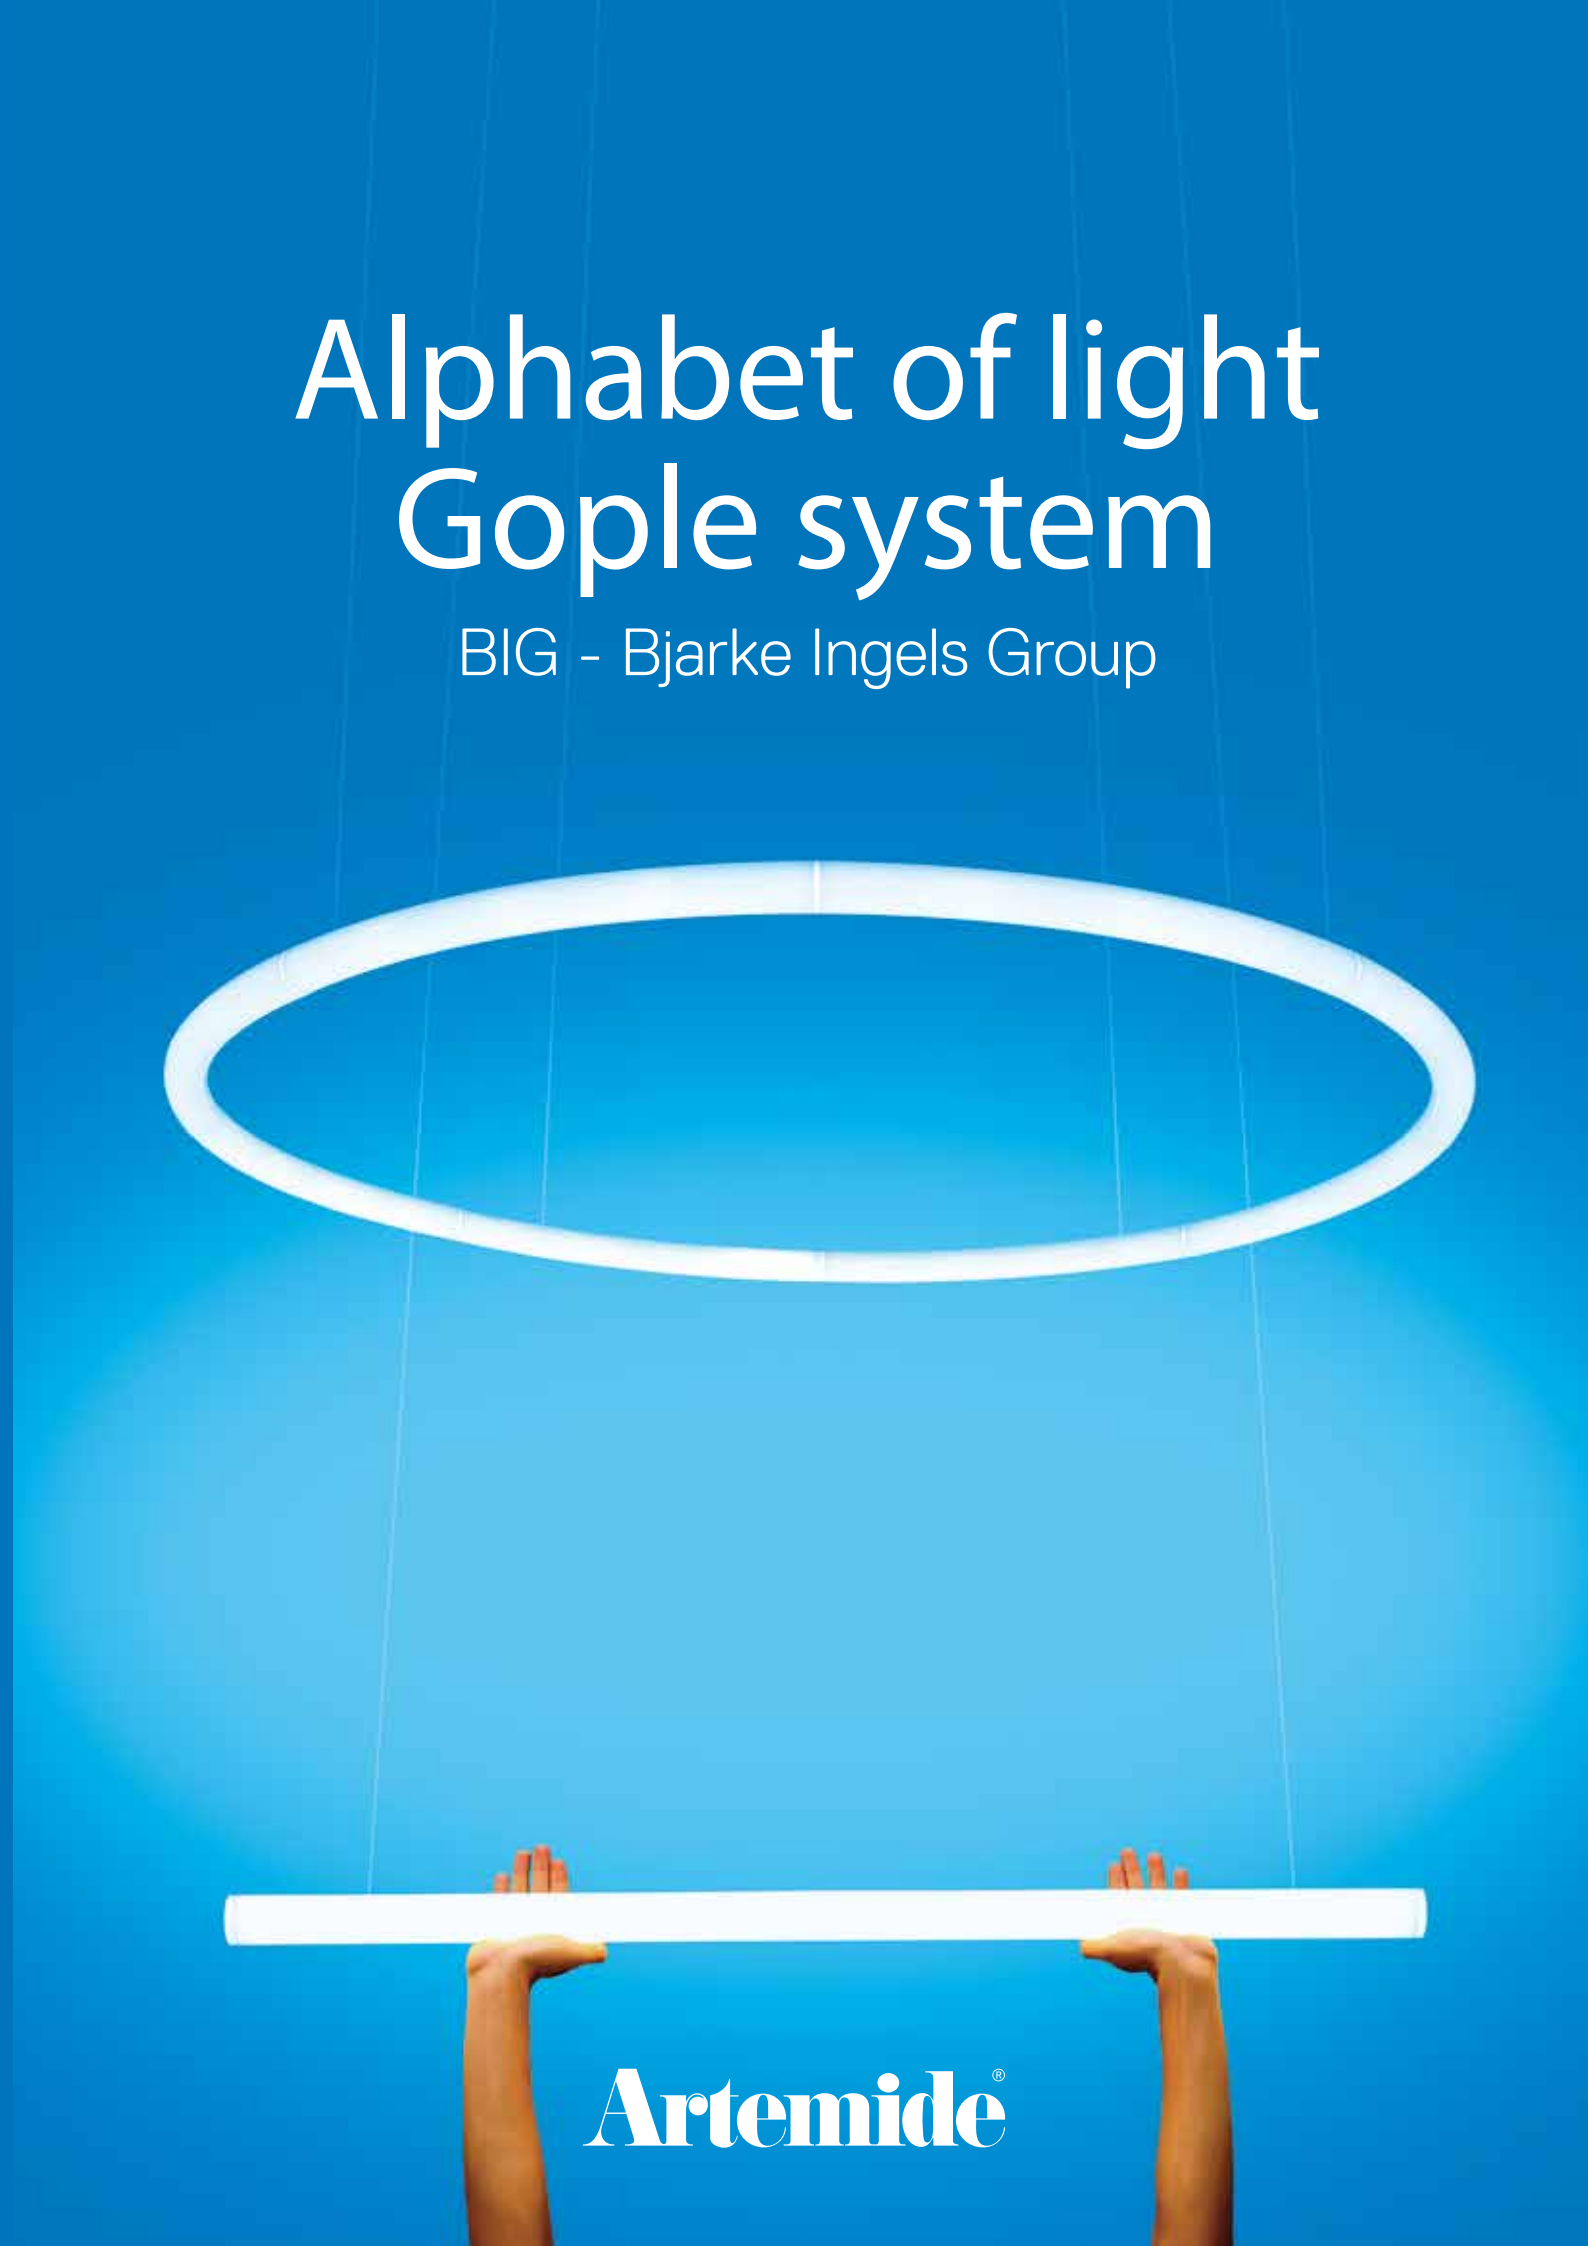

Artemide®

Alphabet of light

Authors
BIG - Bjarke Ingels Group

BIG is a Copenhagen, New York, London and Barcelona based group of architects, designers, urbanists, landscape professionals, interior and product designers, researchers and inventors. The office is currently involved in a large number of projects throughout Europe, North America, Asia and Middle East.
BIG's architecture emerges out of a careful analysis of how contemporary life constantly evolves and changes. Not least due to the influence from multicultural exchange, global economical flows and communication technologies, that all together require new ways of architectural and urban organization. They believe that in order to deal with today's challenges, architecture can profitably move into a field that has been largely unexplored. A pragmatic utopian architecture that steers clear of the petrifying pragmatism of boring boxes and the naïve utopian ideas of digital formalism. Like a form of programmatic alchemy, they create architecture by mixing conventional ingredients such as living, leisure, working, parking and shopping. By hitting the fertile overlap between pragmatic and utopia, the architects once again find the freedom to change the surface of our planet, to better fit contemporary life forms.



Jakob and Bjarke Ingels
Photo by Flemming Leitorp

Alphabet of light


BIG - Bjarke Ingels Group
2016

Alphabet of light system is a lighting language that continues to grow with new elements so it can be developed with increasing freedom throughout space. It is a basic principle that generates an open system implementing just a handful of basic modules.

Thanks to specific geometric proportions, these modules can be combined together to form endless lighting structures, from the most elemental to the most complex, both linear and curved. The BIG idea is combined with Artemide's optoelectronic expertise to give rise to an innovative construction principle that casts continuous and comfortable light.

It is a minimal presence that conceals ultra-sophisticated optoelectronic and patented mechanical innovation as well as ground-breaking control. The system can be controlled using the Artemide App to create freedom both in geometric design and in the definition of dynamic performance levels, which can be programmed or modified in real time. BIG designed also a new font, an alphabet that can be used to write and express one's thoughts, to establish an identity and to guide visitors through a space using light. Alphabet of Light collection can help give shape to a wide range of locations and public spaces, from hospitality and offices to educational and retail, as well as being peerfect for private residential application.

PATENT OF
INVENTION



ARTEMIDE
APP

For further information on Alphabet of light
visit artemide.com



BIG Offices, New York, Ph: Max Touhey | 2018



Circle Offices, Santa Ponsa, Mallorca, ph. Jesús Granada | 2021



Meeting Room, Turin, Italy. Ph. Marco Verrando | 2023





International School Rheintal, Buchs, Swiss, Ph. Linus Lintner | 2023



EPD Environmental product declaration

EPD ITALY

EPDITALY0430
12/05/2023
www.epditaly.it

global geographic validity
in compliance with ISO14025 and
EN50693:2019

certified codes: 2108010A, 2113010A,
2135010A 2267010APP, 2267010A,
1207000A, 1208000APP, 2154010A,
2158010A, 2250010A
+
through a dedicated LCA-TOOL all
Alphabet of light stand alone codes and
system compositions can be certified



Alphabet of light system

PATENT OF INVENTION: MECHANICAL AND ELECTRICAL CONNECTION
PATENT OF INVENTION: OPTICS



Accenture, New York, ph. Eric Laignel | 2021

CML Europe Karlsruhe, Palmbach, Ph. Stephan Baumann | 2020



KPMB Architects Offices, Toronto, ph. Maris Mezulis | 2018





IBM Studios, project by COIMA IMAGE, Milan, Ph. Francesca Iovene | 2019





Caffè Triennale, Milan, Ph. Michele Nastasi | 2022

Associazione Italiana Sommelier, Milan, Italy. Ph. Omar Sartor | 2021




Kapten & Son, Germany. Ph. Thorsten Kohlhaas | 2022






Zogenix Office, Emeryville, USA. Ph. Emily Hagopian | 2020

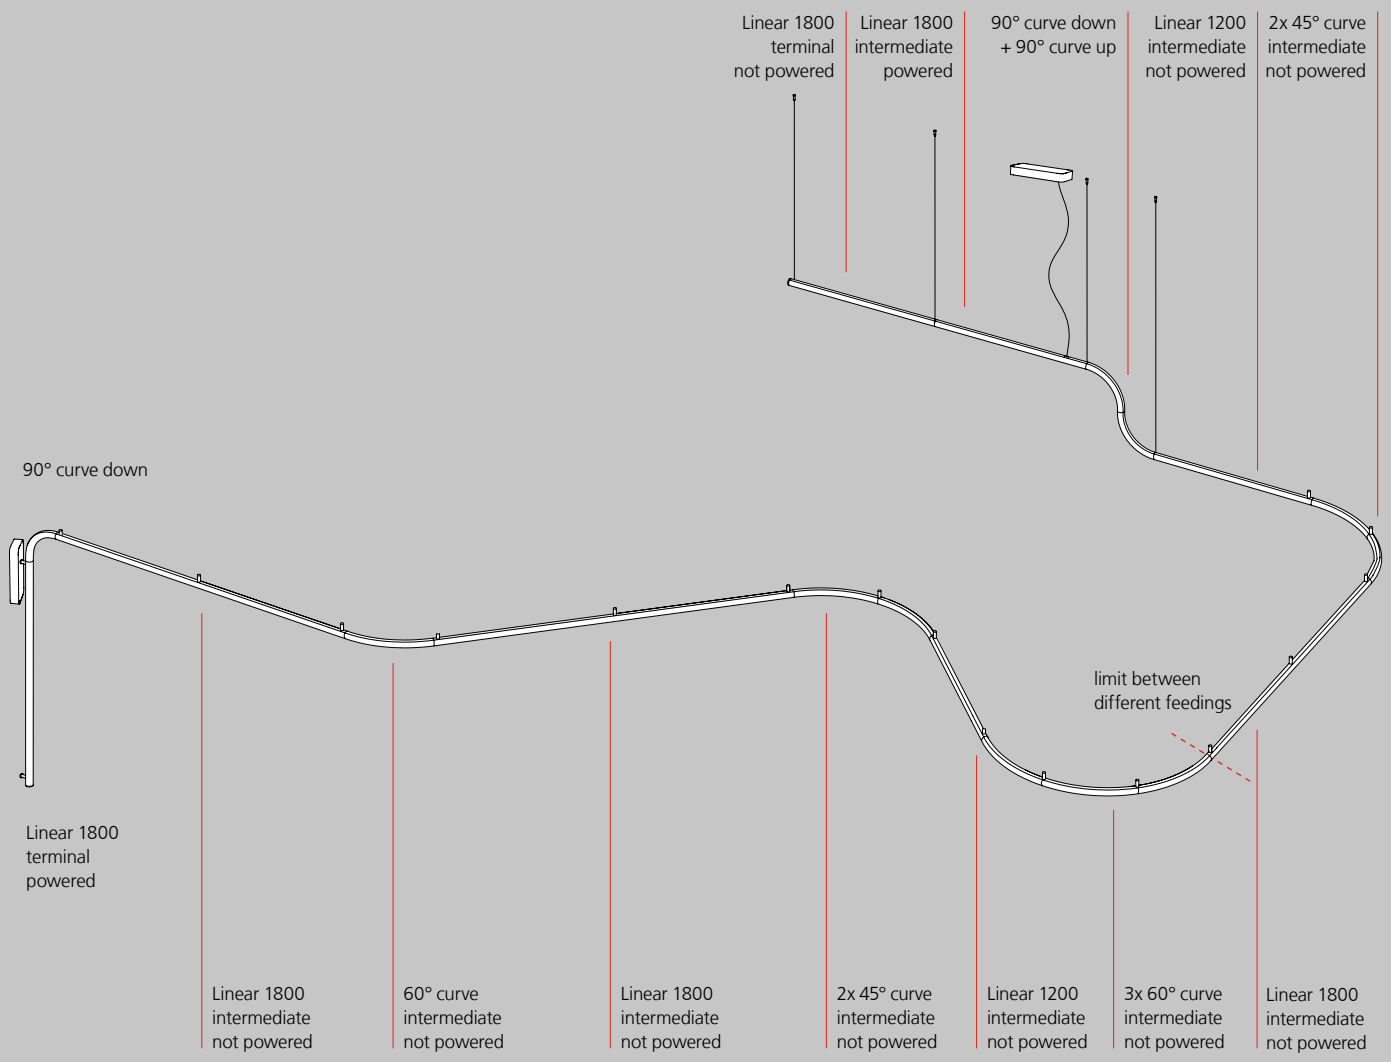
Linear 1800
terminal
not powered
Linear 1800
intermediate
powered
90° curve down
+ 90° curve up
Linear 1200
intermediate
not powered
2x 45° curve
intermediate
not powered
90° curve down
limit between
different feedings
Linear 1800
terminal
powered
Linear 1800
intermediate
not powered
60° curve
intermediate
not powered
Linear 1800
intermediate
not powered
2x 45° curve
intermediate
not powered
Linear 1200
intermediate
not powered
3x 60° curve
intermediate
not powered
Linear 1800
intermediate
not powered

Alphabet of light system configuration

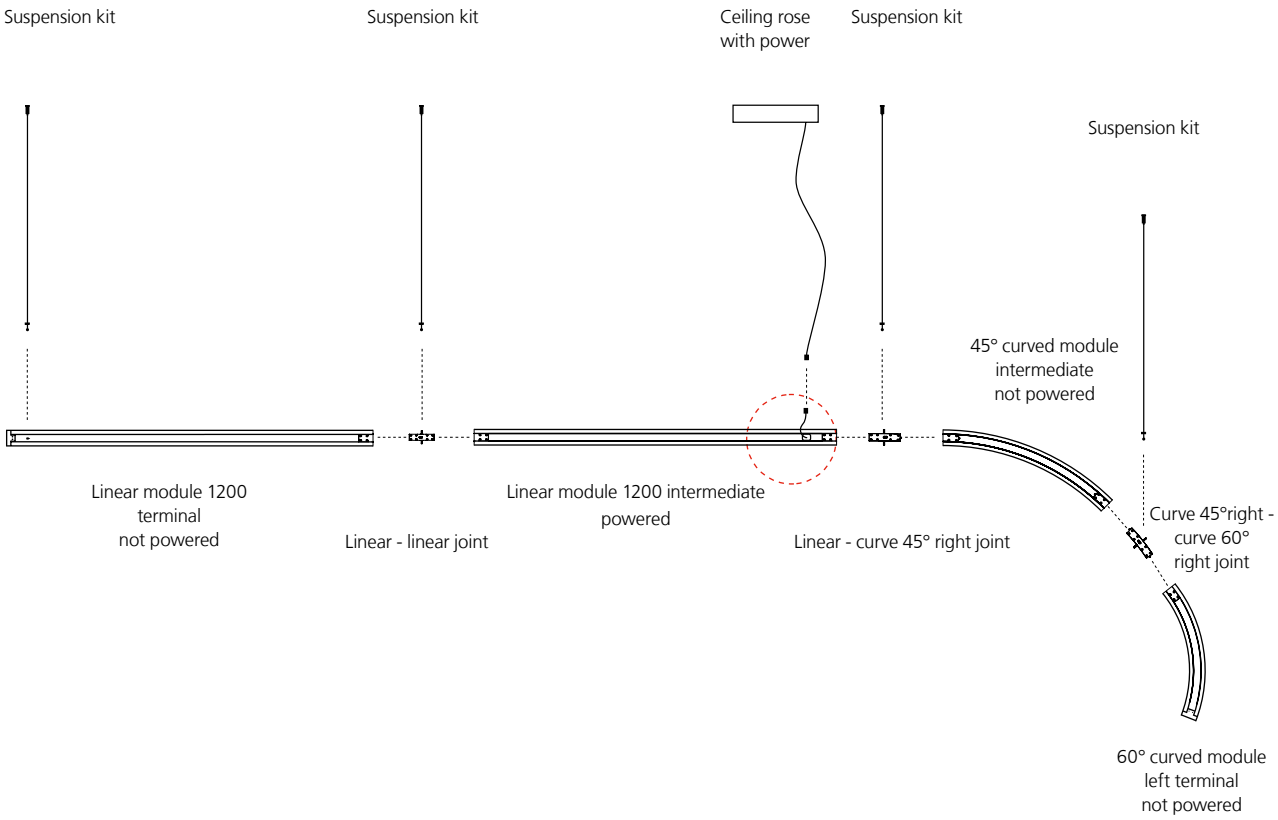

Materials: structure in anodized natural aluminum, tube in white diffusing PMMA.
Linear module are available in three lengths: L 600 / 1200 / 1800 mm
Possibility to articulate the configuration on the horizontal plane with
60°, 45° and 22,5° curves, T and X joint and on the vertical plane.

Max 10 m for each power unit (10 m in one direction or X+Y=10 m in both directions).
Dali / 1-10 / Push or APP dimmable power units, recessed or ceiling mounted.
All modules powered by same power unit will share the same dimming level.

Alphabet of light configurator


Artemide provides tools to support the end customer and especially the lighting professionals in choosing the best lighting solution.

For an intuitive composition of the most complex systems, Artemide offers innovative and complete configurators on its website.


Alphabet of light system Configurator is a useful tool to simplify the design of your composition.


After defining the layout of the space, the desired system can be created by a simple drag and drop of the various available modules. Once the project is completed, the system returns drawings and a complete datasheet with all the details to proceed with the order.

1. **Build your space**

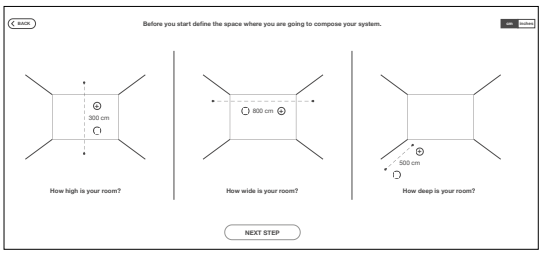


2. **Drag and drop**





3. **Save it and send it!**








Senator White Bear Yard, London, UK, Ph. Amphitype | 2021


Suspension modules

LINEAR MODULES


600 terminal (588 mm)




600 intermediate (588 mm)




1200 terminal (1180 mm)




1200 intermediate (1180 mm)



1800 terminal (1772 mm)




1800 intermediate (1772 mm)




VERTICAL MODULES*

90° Vertical UP




90° Vertical DOWN




CONNECTION MODULES*


X Joint



T Joint



90° Joint



ALPHABET OF LIGHT - SYSTEM

Opal White



XF



*EPD compliance

EPDITALY0430
12/05/2023
www.epditaly.it

MacAdam 3SDCM
Life L70 (10K) 60000h
CRI =90

IP20

SUSPENSION LINEAR MODULES

Length	W	V	Flux	CCT	Powered Code	Not powered Code
600 terminal	11 W	24V	1133 lm	3000K	**2100010AHEB**	**2101010AHEB**
				3500K	**2100C10AHEB**	**2101C10AHEB**
600 intermediate	11 W	24V	1133 lm	3000K		**2102010AHEB**
				3500K		**2102C10AHEB**
1200 terminal	21 W	24V	2267 lm	3000K	**2104010AHEB**	**2106010AHEB**
				3500K	**2104C10AHEB**	**2106C10AHEB**
1200 intermediate	21 W	24V	2267 lm	3000K	**2105010AHEB**	**2107010AHEB**
				3500K	**2105C10AHEB**	**2107C10AHEB**
1800 terminal	33 W	24V	3400 lm	3000K	**2108010AHEB***	**2110010AHEB**
				3500K	**2108C10AHEB**	**2110C10AHEB**
1800 intermediate	33 W	24V	3400 lm	3000K	**2109010AHEB**	**2111010AHEB**
				3500K	**2109C10AHEB**	**2111C10AHEB**

VERTICAL MODULES*

Length	W	V	Flux	CCT	Not powered Code
90° vertical UP	8 W	24V	750 lm	3000K	**2124010AHEB**
				3500K	**2124C10AHEB**
90° vertical DOWN	8 W	24V	722 lm	3000K	**2125010AHEB**
				3500K	**2125C10AHEB**

CONNECTION MODULES*

	W	V	Flux	CCT	Not powered Code
X Joint	3 W	24V	253 lm	3000K	**2158010AHEB***
				3500K	**2158C10AHEB**
T Joint	2,5 W	24V	211 lm	3000K	**2156010AHEB**
				3500K	**2156C10AHEB**
90° Joint	1,5 W	24V	105 lm	3000K	**2154010AHEB***
				3500K	**2154C10AHEB**

* Vertical modules and connection modules can only be combined with linear modules.


Suspension modules

CURVED MODULES

22,5° terminal right

22,5° terminal left


22,5° intermediate

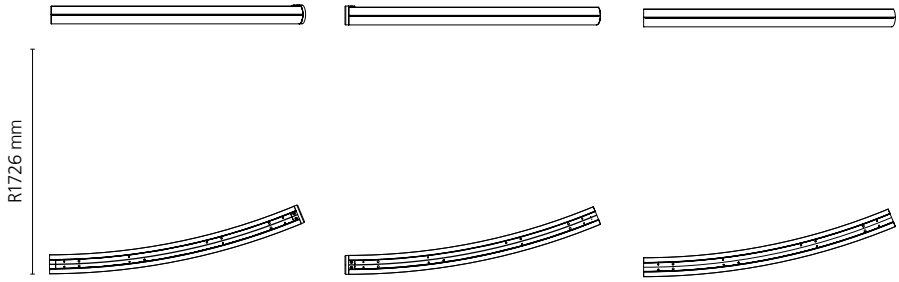

45° terminal right

45° terminal left


45° intermediate

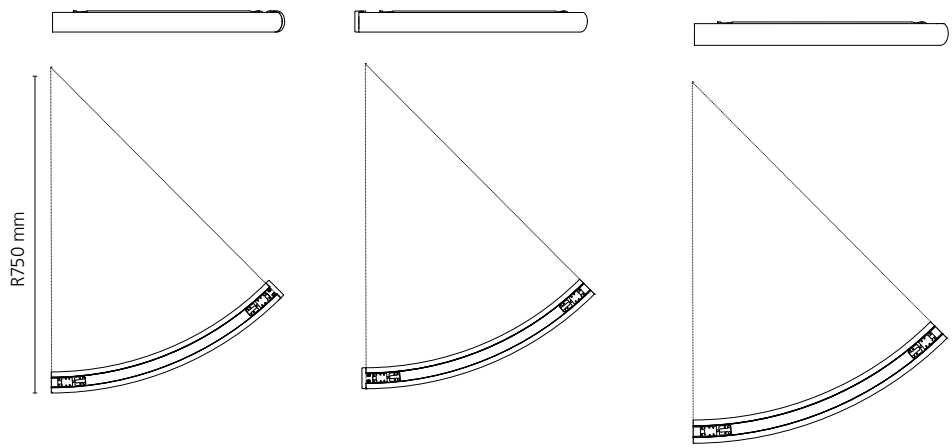

60° terminal right

60° terminal left

60° intermediate

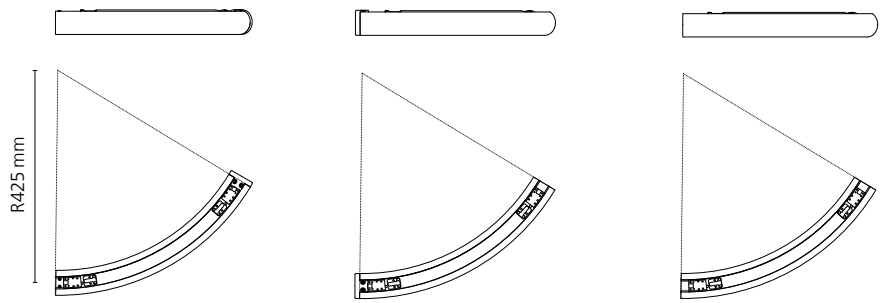

ALPHABET OF LIGHT - SYSTEM

Opal White



XF



*EPD compliance

EPDITALY0430
12/05/2023
www.epditaly.it

MacAdam 3SDCM
Life L70 (10K) 60000h
CRI =90

IP20

SUSPENSION CURVED MODULES

Length	W	V	Flux	CCT	Powered Code	Not powered Code
22,5° terminal left	11 W	24V	1118 lm	3000K	**2602010AHEB**	**2605010AHEB**
				3500K	**2602C10AHEB**	**2605C10AHEB**
22,5° terminal right	11 W	24V	1118 lm	3000K	**2601010AHEB**	**2604010AHEB**
				3500K	**2601C10AHEB**	**2604C10AHEB**
22,5° intermediate	11 W	24V	1118 lm	3000K	**2600010AHEB**	**2603010AHEB**
				3500K	**2600C10AHEB**	**2603C10AHEB**
45° terminal left	11 W	24V	1118 lm	3000K	**2112010AHEB**	**2115010AHEB**
				3500K	**2112C10AHEB**	**2115C10AHEB**
45° terminal right	11 W	24V	1118 lm	3000K	**2113010AHEB***	**2116010AHEB**
				3500K	**2113C10AHEB**	**2116C10AHEB**
45° intermediate	11 W	24V	1118 lm	3000K	**2114010AHEB**	**2117010AHEB**
				3500K	**2114C10AHEB**	**2117C10AHEB**
60° terminal left	8 W	24V	815 lm	3000K	**2118010AHEB**	**2121010AHEB**
				3500K	**2118C10AHEB**	**2121C10AHEB**
60° terminal right	8 W	24V	815 lm	3000K	**2119010AHEB**	**2122010AHEB**
				3500K	**2119C10AHEB**	**2122C10AHEB**
60° intermediate	8 W	24V	815 lm	3000K	**2120010AHEB**	**2123010AHEB**
				3500K	**2120C10AHEB**	**2123C10AHEB**

Suspension accessories	Code
Suspension kit L=1,5 m	**2266010A**
Suspension kit L=4 m	**2273010A**
*extension feeding cable L=1,25 m	**2274010A**
*extension feeding cable L=2,5 m	**2275010A**

*The total maximum length of the feeding cable is 4,00 m (either for ceiling mounted or remote power units).
Overpassing this value could affect uniformity of light emission.

Suspension Power Units	Code
Dali / Push ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)	**2267010A***
APP ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)	**2267010APP***
Dali / Push remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)	**2272010A**
APP remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)	**2272010APP**

Ø 160

Optional control devices - BLL wireless switch




Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

Code
DV1080APP


Wall/ceiling modules

LINEAR MODULES


600 terminal (588 mm)



600 intermediate (588 mm)




1200 terminal (1180 mm)




1200 intermediate (1180 mm)



1800 terminal (1772 mm)




1800 intermediate (1772 mm)




CONNECTION MODULES*


X Joint



T Joint



90° Joint



ALPHABET OF LIGHT - SYSTEM

Opal White



XF



*EPD compliance

EPDITALY0430
12/05/2023
www.epditaly.it

MacAdam 3SDCM
Life L70 (10K) 60000h
CRI =90

IP20

WALL/CEILING LINEAR MODULES

					Powered	Semi-recessed powered	Not powered
Length	W	V	Flux	CCT	Code	Code	Code
600 terminal	11 W	24V	1133 lm	3000K	**2130010AHEB**	**2160010AHEB**	**2131010AHEB**
				3500K	**2130C10AHEB**	**2160C10AHEB**	**2131C10AHEB**
600 intermediate	11 W	24V	1133 lm	3000K			**2132010AHEB**
				3500K			**2132C10AHEB**
1200 terminal	21 W	24V	2267 lm	3000K	**2134010AHEB**	**2161010AHEB**	**2136010AHEB**
				3500K	**2134C10AHEB**	**2161C10AHEB**	**2136C10AHEB**
1200 intermediate	21 W	24V	2267 lm	3000K	**2135010AHEB***	**2162010AHEB**	**2137010AHEB**
				3500K	**2135C10AHEB**	**2162C10AHEB**	**2137C10AHEB**
1800 terminal	33 W	24V	3400 lm	3000K	**2138010AHEB**	**2163010AHEB**	**2140010AHEB**
				3500K	**2138C10AHEB**	**2163C10AHEB**	**2140C10AHEB**
1800 intermediate	33 W	24V	3400 lm	3000K	**2139010AHEB**	**2164010AHEB**	**2141010AHEB**
				3500K	**2139C10AHEB**	**2164C10AHEB**	**2141C10AHEB**


CONNESCTION MODULES*


	W	V	Flux	CCT	Not powered
					Code
X Joint	3 W	24V	253 lm	3000K	**2159010AHEB**
				3500K	**2159C10AHEB**
T Joint	2,5 W	24V	211 lm	3000K	**2157010AHEB**
				3500K	**2157C10AHEB**
90° Joint	1,5 W	24V	105 lm	3000K	**2155010AHEB**
				3500K	**2155C10AHEB**


***** Vertical modules and connection modules can only be combined with linear modules.

Wall/ceiling modules

CURVED MODULES

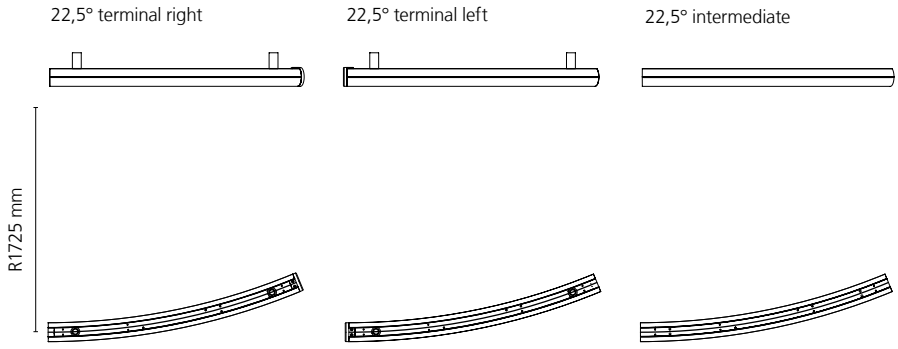

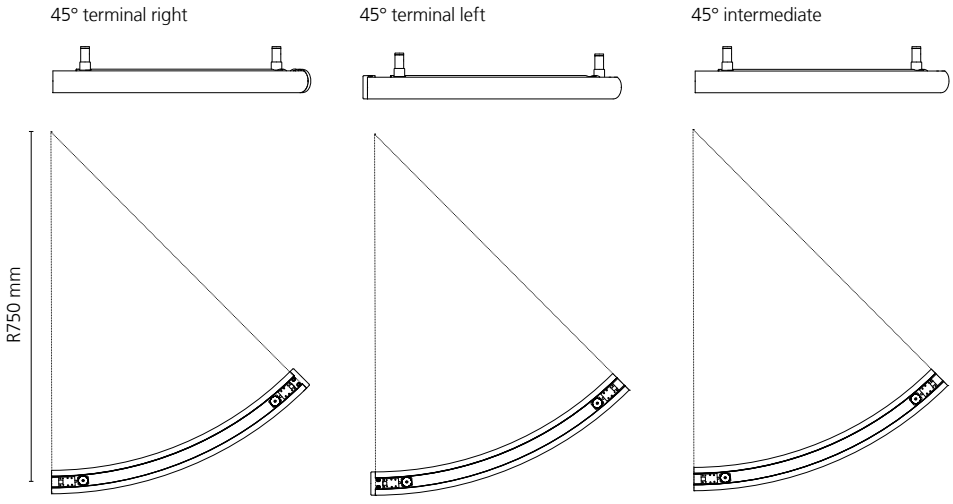

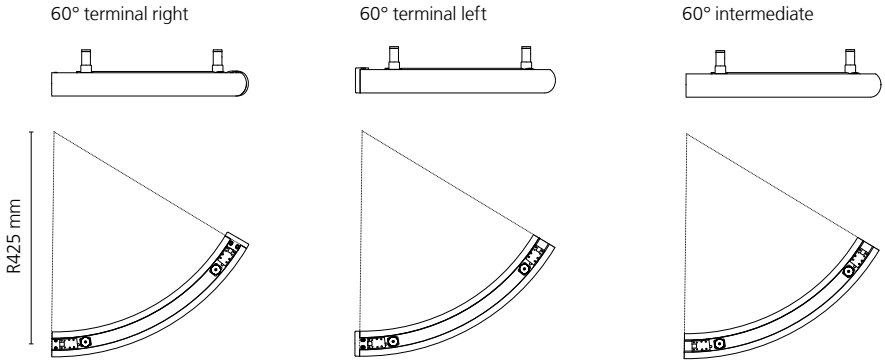

ALPHABET OF LIGHT - SYSTEM

Opal White

XF

MacAdam 3SDCM
Life L70 (10K) 60000h
CRI =90

IP20

WALL/CEILING CURVED MODULES

					Powered	Semi-recessed powered	Not powered
Length	W	V	Flux	CCT	Code	Code	Code
22,5° terminal left	11 W	24V	1118 lm	3000K	**2608010AHEB**	**2627010AHEB**	**2611010AHEB**
				3500K	**2608C10AHEB**	**2627C10AHEB**	**2611C10AHEB**
22,5° terminal right	11 W	24V	1118 lm	3000K	**2607010AHEB**	**2626010AHEB**	**2610010AHEB**
				3500K	**2607C10AHEB**	**2626C10AHEB**	**2610C10AHEB**
22,5° intermediate	11 W	24V	1118 lm	3000K	**2606010AHEB**	**2625010AHEB**	**2609010AHEB**
				3500K	**2606C10AHEB**	**2625C10AHEB**	**2609C10AHEB**
45° terminal left	11 W	24V	1118 lm	3000K	**2142010AHEB**	**2165010AHEB**	**2145010AHEB**
				3500K	**2142C10AHEB**	**2165C10AHEB**	**2145C10AHEB**
45° terminal right	11 W	24V	1118 lm	3000K	**2143010AHEB**	**2166010AHEB**	**2146010AHEB**
				3500K	**2143C10AHEB**	**2166C10AHEB**	**2146C10AHEB**
45° intermediate	11 W	24V	1118 lm	3000K	**2144010AHEB**	**2167010AHEB**	**2147010AHEB**
				3500K	**2144C10AHEB**	**2167C10AHEB**	**2147C10AHEB**
60° terminal left	8 W	24V	815 lm	3000K	**2148010AHEB**	**2168010AHEB**	**2151010AHEB**
				3500K	**2148C10AHEB**	**2168C10AHEB**	**2151C10AHEB**
60° terminal right	8 W	24V	815 lm	3000K	**2149010AHEB**	**2169010AHEB**	**2152010AHEB**
				3500K	**2149C10AHEB**	**2169C10AHEB**	**2152C10AHEB**
60° intermediate	8 W	24V	815 lm	3000K	**2150010AHEB**	**2170010AHEB**	**2153010AHEB**
				3500K	**2150C10AHEB**	**2170C10AHEB**	**2153C10AHEB**

Wall/Ceiling Power Units	Code	
Dali / Push ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)	**2268010A**	
APP ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44)	**2268010APP**	
Dali / Push remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)	**2271010A**	
APP remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)	**2271010APP**	Ø 160

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

Code
DV1080APP

Joints



Zogenix, Emerville, USA, ph. Emily Hagopian | 2020

ALPHABET OF LIGHT - SYSTEM

Opal White



XF



*EPD compliance

EPDITALY0430
12/05/2023
www.epditaly.it

IP20


JOINTS

Accessories


Joint		Code
01	→ Linear - linear joint ← Linear - linear joint	**2250010A***
02	→ Linear - curve 45° right joint ← Curve 45° left - linear joint	**2251010A**
03	→ Linear - curve 45° left joint ← Curve 45° right - linear joint	**2252010A**
04a	→ 45° curve right - 45° curve right joint ← 45° curve left - 45° curve left joint	**2255010A**
04b	→ 45° curve left - 45° curve left joint ← 45° curve right - 45° curve right joint	
05	→ Linear - curve 60° right joint ← 60° curve left - linear joint	**2253010A**
06	→ Linear - curve 60° left joint ← 60° curve right - linear joint	**2254010A**
07a	→ 60° curve right - 60° curve right joint ← 60° curve left - 60° curve left joint	**2256010A**
07b	→ 60° curve left - 60° curve left joint ← 60° curve right - 60° curve right joint	
08	→ 60° curve right - 45° curve left joint ← 45° curve right - 60° curve left joint	**2257010A**
09	→ 45° curve left - 45° curve right joint ← 45° curve left - 45° curve right joint	**2260010A**
10	→ 60° curve right - 60° curve left joint ← 60° curve right - 60° curve left joint	**2259010A**
11	→ 60° curve right - 45° curve right joint ← 45° curve left - 60° curve left joint	**2261010A**
12	→ 60° curve left - 45° curve left joint ← 45° curve right - 60° curve right joint	**2262010A**
13	→ 90° down - 90° up joint ← 90° up - 90° down joint	**2263010A**
14	→ Linear - 90° vertical up joint ← 90° vertical up joint - linear joint	**2264010A**
15	→ Linear - 90° vertical down joint ← 90° vertical down - linear joint	**2265010A**
16	→ 60° curve left - 45° curve right joint ← 45° curve left - 60° curve right joint	**2258010A**
17	→ 45° curve right - 45° curve left joint ← 45° curve right - 45° curve left joint	**2269010A**
18	→ 60° curve left - 60° curve right joint ← 60° curve right - 60° curve left joint	**2270010A**
19	→ 22° curve right - 22° curve right joint ← 22° curve left - 22° curve left joint	**2612010A**
20	→ Linear - curve 22° right joint ← Curve 22° left - linear joint	**2613010A**
21	→ Linear - curve 22° left joint ← Curve 22° right - linear joint	**2614010A**
22	→ 22° curve right - 22° curve left joint ← 22° curve right - 22° curve left joint	**2615010A**
23	→ 22° curve right - 60° curve right joint ← 60° curve left - 22° curve left joint	**2616010A**
24	→ 22° curve right - 60° curve left joint ← 60° curve right - 22° curve left joint	**2617010A**
25	→ 22° curve right - 45° curve right joint ← 45° curve left - 22° curve left joint	**2618010A**
26	→ 22° curve right - 45° curve left joint ← 45° curve right - 22° curve left joint	**2619010A**
27	→ 22° curve left - 60° curve right joint ← 60° curve left - 22° curve right joint	**2620010A**
28	→ 22° curve left - 60° curve left joint ← 60° curve right - 22° curve right joint	**2621010A**
29	→ 22° curve left - 45° curve right joint ← 45° curve left - 22° curve right joint	**2622010A**
30	→ 22° curve left - 45° curve left joint ← 45° curve right - 22° curve right joint	**2623010A**
31	→ 22° curve left - 22° curve right joint ← 22° curve left - 22° curve right joint	**2624010A**

→ left to right path
← right to left path


→ left to right path
← right to left path

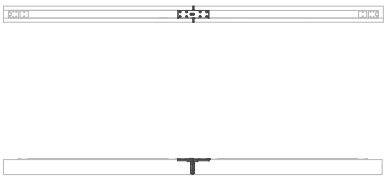


Code 2250010A_JOINT 01
→ LINEAR - LINEAR JOINT
← LINEAR - LINEAR JOINT

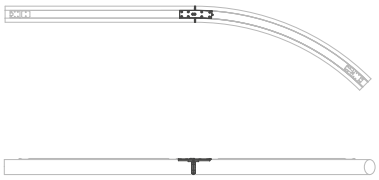


Code 2251010A_JOINT 02
→ LINEAR - CURVE 45° RIGHT JOINT
← CURVE 45° LEFT - LINEAR JOINT

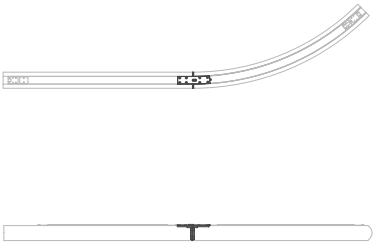


Code 2252010A_JOINT 03
→ LINEAR - CURVE 45° LEFT JOINT
← CURVE 45° RIGHT - LINEAR JOINT




Code 2255010A_JOINT 04a
→ 45° CURVE RIGHT - 45° CURVE RIGHT JOINT
← 45° CURVE LEFT - 45° CURVE LEFT JOINT

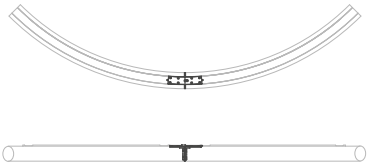

Code 2255010A_JOINT 04b
→ 45° CURVE LEFT - 45° CURVE LEFT JOINT
← 45° CURVE RIGHT - 45° CURVE RIGHT JOINT




Code 2253010A_JOINT 05
→ LINEAR - CURVE 60° RIGHT JOINT
← 60° CURVE LEFT - LINEAR JOINT RIGHT




Code 2254010A_JOINT 06
→ LINEAR - CURVE 60° LEFT JOINT
← 60° CURVE RIGHT - LINEAR JOINT




Code 2256010A_JOINT 07a
→ 60° CURVE RIGHT - 60° CURVE RIGHT JOINT
← 60° CURVE LEFT - 60° CURVE LEFT JOINT




Code 2256010A_JOINT 07b
→ 60° CURVE LEFT - 60° CURVE LEFT JOINT
← 60° CURVE RIGHT - 60° CURVE RIGHT JOINT




Code 2257010A_JOINT 08
→ 60° CURVE RIGHT - 45° CURVE LEFT JOINT
← 45° CURVE RIGHT - 60° CURVE LEFT JOINT




Code 2258010A_JOINT 16
→ 60° CURVE LEFT - 45° CURVE RIGHT JOINT
← 45° CURVE LEFT - 60° CURVE RIGHT JOINT




Code 2259010A_JOINT 10
→ 60° CURVE RIGHT - 60° CURVE LEFT JOINT
← 60° CURVE RIGHT - 60° CURVE LEFT JOINT




Code 2270010A_JOINT 18
→ 60° CURVE LEFT - 60° CURVE RIGHT JOINT
← 60° CURVE LEFT - 60° CURVE RIGHT JOINT




Code 2261010A_JOINT 11
→ 60° CURVE RIGHT - 45° CURVE RIGHT JOINT
← 45° CURVE LEFT - 60° CURVE LEFT JOINT




Code 2262010A_JOINT 12
→ 60° CURVE LEFT - 45° CURVE LEFT JOINT
← 45° CURVE RIGHT - 60° CURVE RIGHT JOINT




Code 2263010A_JOINT 13
→ 90° VERTICAL DOWN - 90° VERTICAL UP JOINT
← 90° VERTICAL UP - 90° VERTICAL DOWN JOINT




Code 2264010A_JOINT 14
→ LINEAR - 90° VERTICAL UP JOINT
← 90° VERTICAL UP - LINEAR JOINT



Code 2265010A_JOINT 15
→ LINEAR - 90° VERTICAL DOWN JOINT
← 90° VERTICAL DOWN - LINEAR JOINT

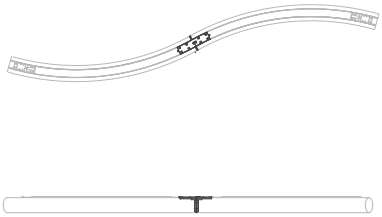


Code 2260010A_JOINT 09
→ 45° CURVE LEFT - 45° CURVE RIGHT JOINT
← 45° CURVE LEFT - 45° CURVE RIGHT JOINT

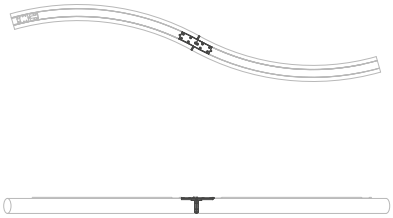


Code 2269010A_JOINT 17
→ 45° CURVE RIGHT - 45° CURVE LEFT JOINT
← 45° CURVE RIGHT - 45° CURVE LEFT JOINT


→ left to right path
← right to left path

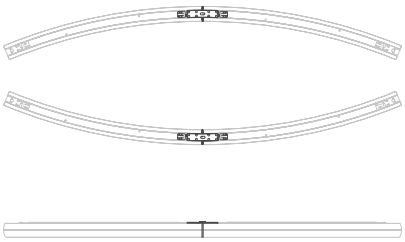


Code 2612010A_**JOINT 19**
→ 22° CURVE RIGHT - CURVE RIGHT JOINT
← 22° CURVE LEFT - CURVE LEFT JOINT

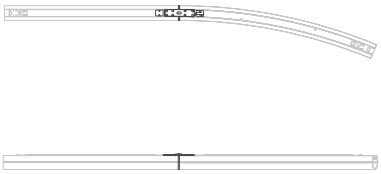


Code 2613010A_**JOINT 20**
→ LINEAR - 22° CURVE RIGHT JOINT
← 22° CURVE LEFT - LINEAR JOINT

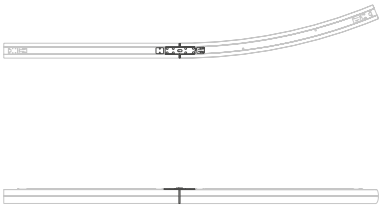


Code 2614010A_**JOINT 21**
→ LINEAR - 22° CURVE LEFT JOINT
← 22° CURVE RIGHT - LINEAR JOINT

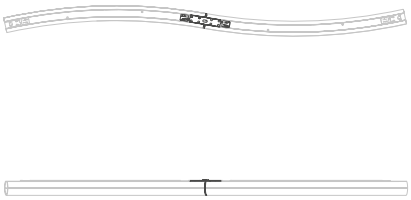


Code 2615010A_**JOINT 22**
→ 22° CURVE RIGHT - 22° CURVE LEFT JOINT
← 22° CURVE RIGHT - 22° CURVE LEFT JOINT




Code 2616010A_**JOINT 23**
→ 22° CURVE RIGHT - 60° CURVE RIGHT JOINT
← 60° CURVE LEFT - 22° CURVE LEFT JOINT




Code 2617010A_**JOINT 24**
→ 22° CURVE RIGHT - 60° CURVE LEFT JOINT
← 60° CURVE RIGHT - 22° CURVE LEFT JOINT

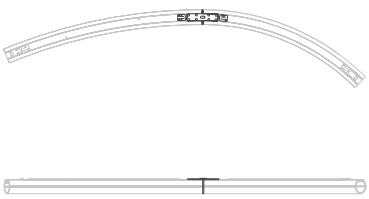


Code 2618010A_**JOINT 25**
→ 22° CURVE RIGHT - 45° CURVE RIGHT JOINT
← 45° CURVE LEFT - 22° CURVE LEFT JOINT

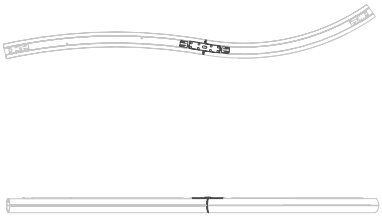


Code 2619010A_**JOINT 26**
→ 22° CURVE RIGHT - 45° CURVE LEFT JOINT
← 45° CURVE RIGHT - 22° CURVE LEFT JOINT




Code 2620010A_**JOINT 27**
→ 22° CURVE LEFT - 60° CURVE RIGHT JOINT
← 60° CURVE LEFT - 22° CURVE RIGHT JOINT




Code 2621010A_**JOINT 28**
→ 22° CURVE LEFT - 60° CURVE LEFT JOINT
← 60° CURVE RIGHT - 22° CURVE RIGHT JOINT

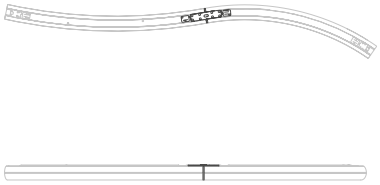

Code 2622010A_**JOINT 29**
→ 22° CURVE LEFT - 45° CURVE RIGHT JOINT
← 45° CURVE LEFT - 22° CURVE RIGHT JOINT

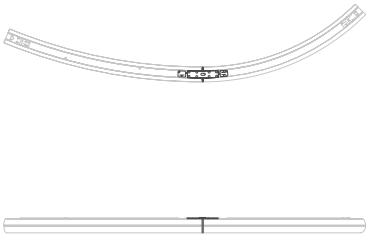

Code 2623010A_**JOINT 30**
→ 22° CURVE LEFT - 45° CURVE LEFT JOINT
← 45° CURVE RIGHT - 22° CURVE RIGHT JOINT

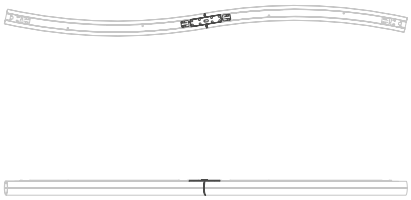

Code 2624010A_**JOINT 31**
→ 22° CURVE LEFT - 60° CURVE RIGHT JOINT
← 22° CURVE LEFT - 22° CURVE RIGHT JOINT

Pinterest Offices, Toronto, Canada, Ph. Ben Rahn | 2023



Featherstone Street Offices, London, UK. Ph. Amphitype | 2021






Perkins Eastman Offices, Pittsburgh, USA. Ph. Andrew Rugge | 2021

Gople system


BIG - Bjarke Ingles Group
2020

Gople system combines with the Alphabet of light system, creating a universal lighting able to meet the requirements of any space, but above all to define a new approach to lighting projects.
This is an increasingly universal language that diversifies its performance and expands the freedom to illuminate every angle.
Gople spot adds accent lights to break up the diffused light of Alphabet of light. Light thus follows spaces and activities not just by tracing geometries that move fluidly in three directions, but also through an alternation of light and shadow, the choice of light emissions that are diversified and specialised.
Alphabet of light is a versatile, multi-use project, perfect for illuminating any space, which in combination with Gople system opens up new fields of application and increasingly becomes the ideal tool for retail spaces.
Gople spot offers efficient performance, excellent colour rendering and numerous variables in terms of emission qualities such as colour temperature and beam angles, which make it a professional, technical product.



ARTEMIDE
APP



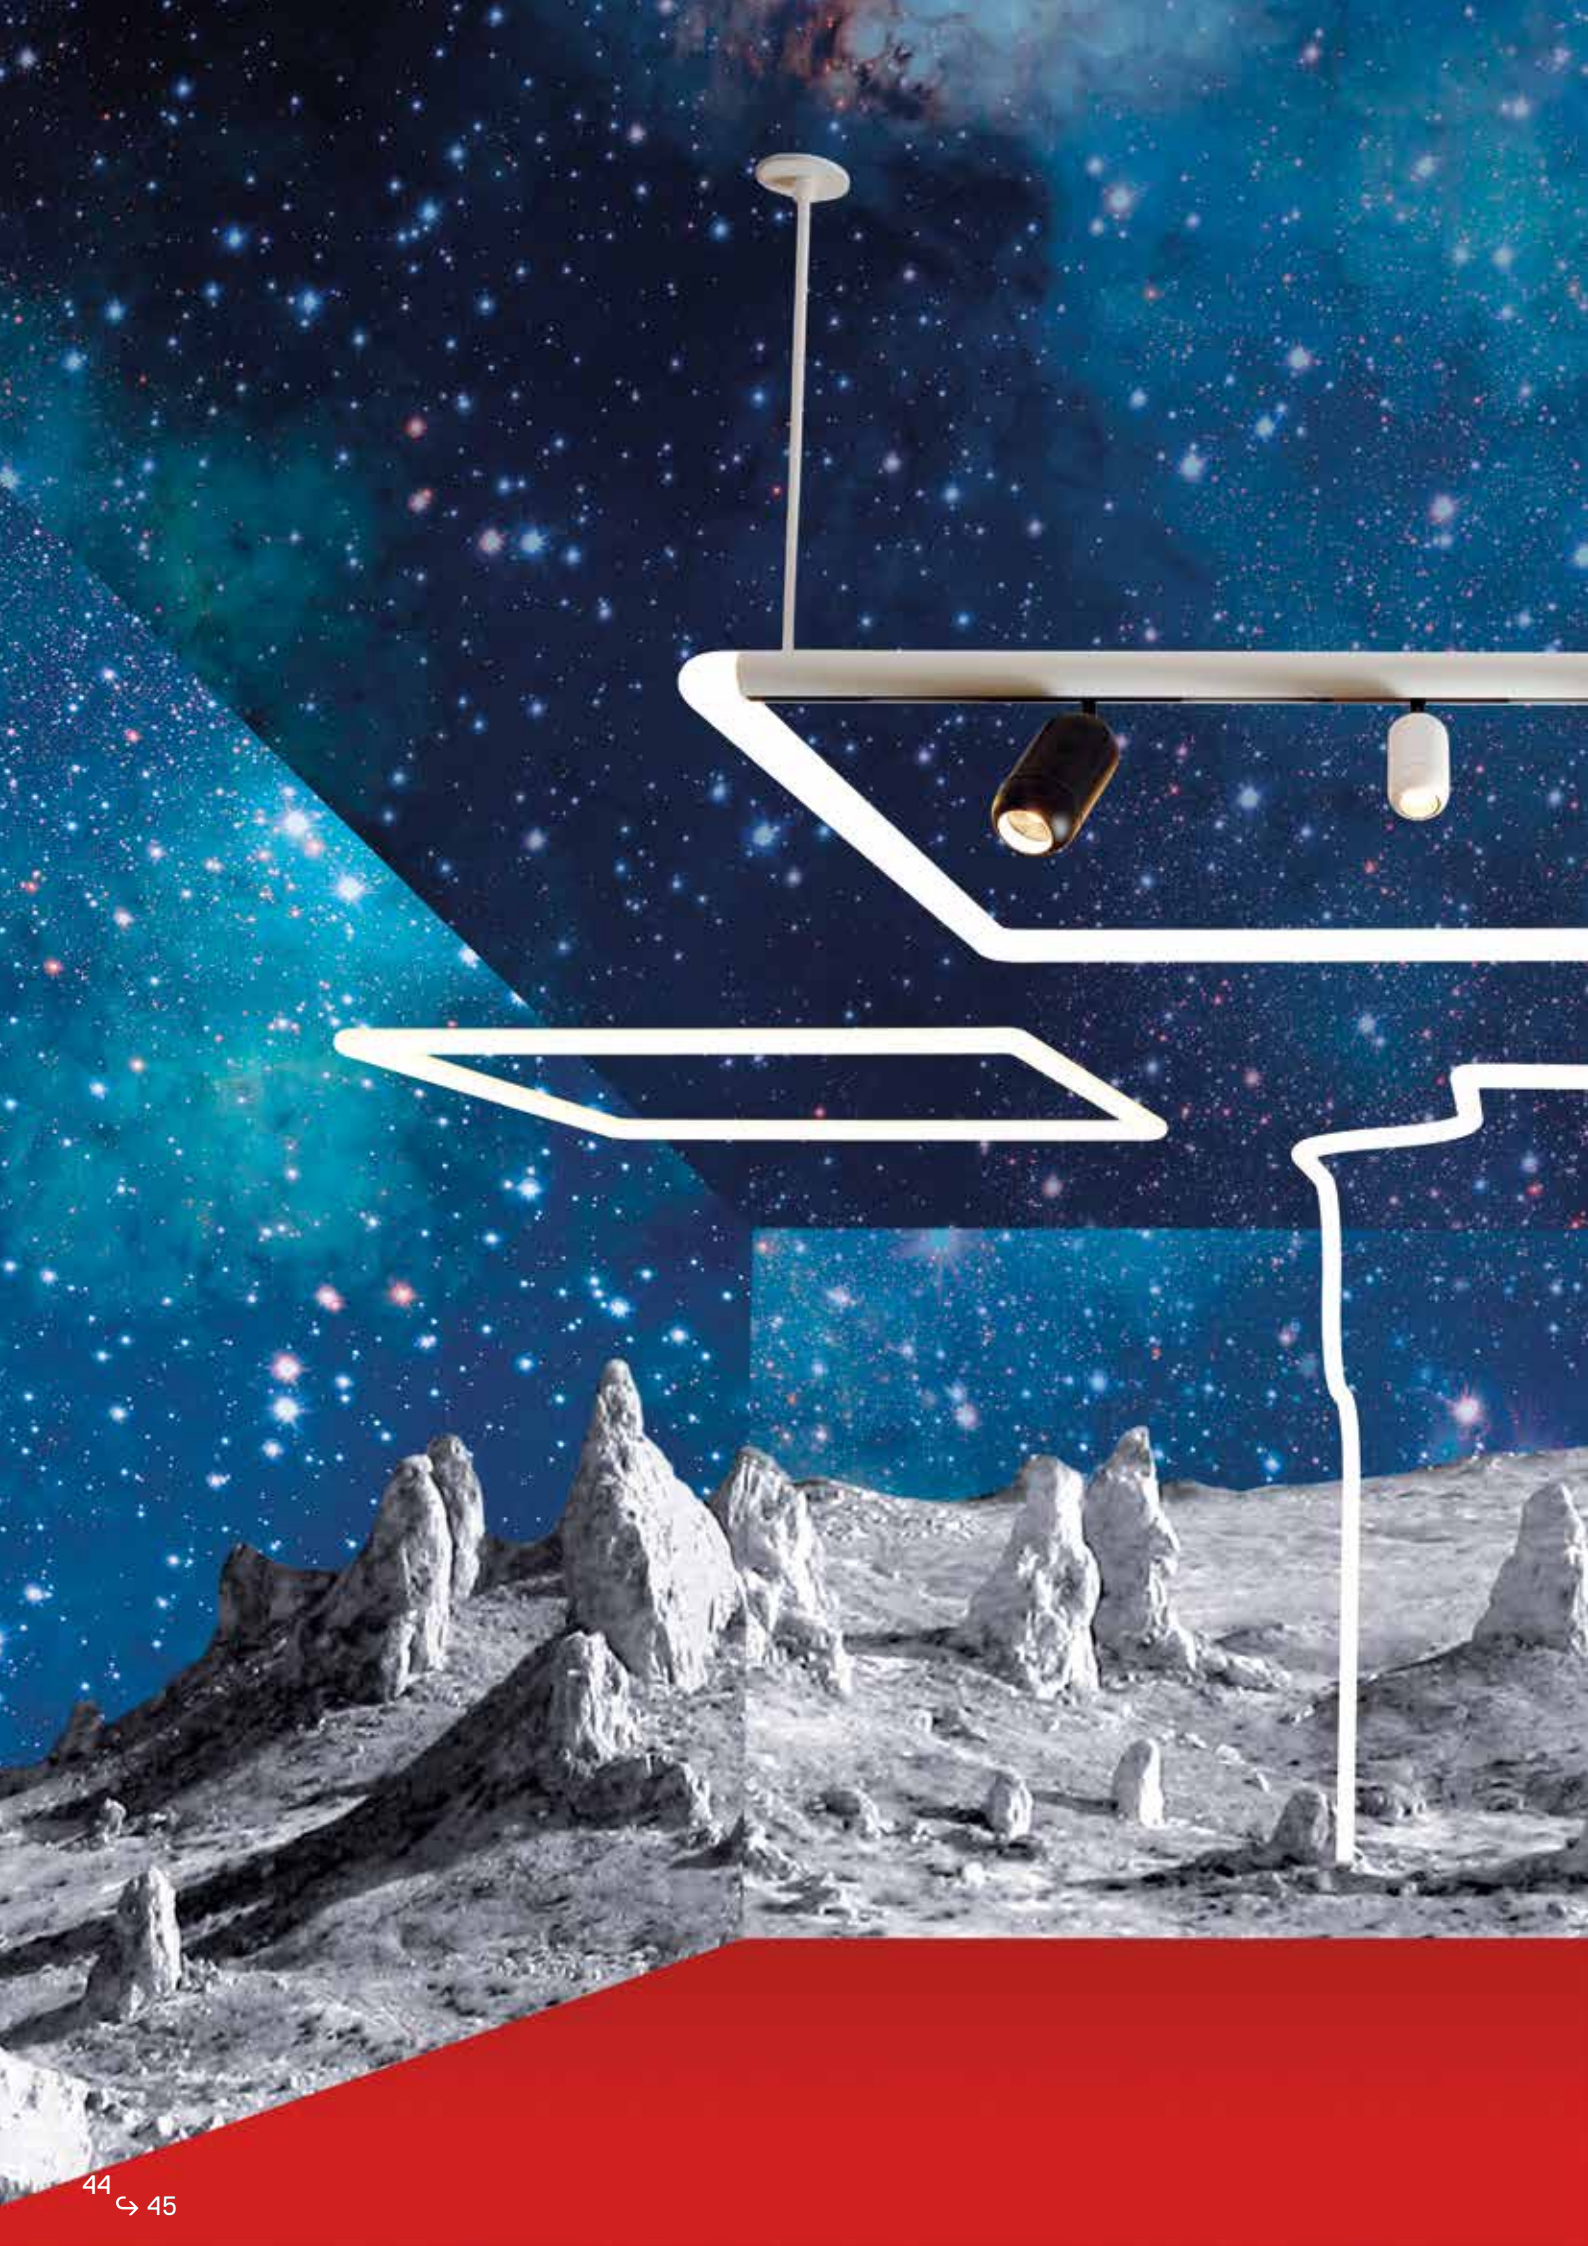


Pierpaolo Ferrari

Complete system

Gople system is designed to allow double emission: it can have a track for direct spot emission and a diffused indirect light.

The different typology of Gople system modules can be combined with the maximum freedom.

The same diameter of Alphabet of light and Gople system allows to combine the two systems with mechanical continuity.




ALPHABET OF LIGHT

24V


GOPLE SYSTEM TRACK


48V

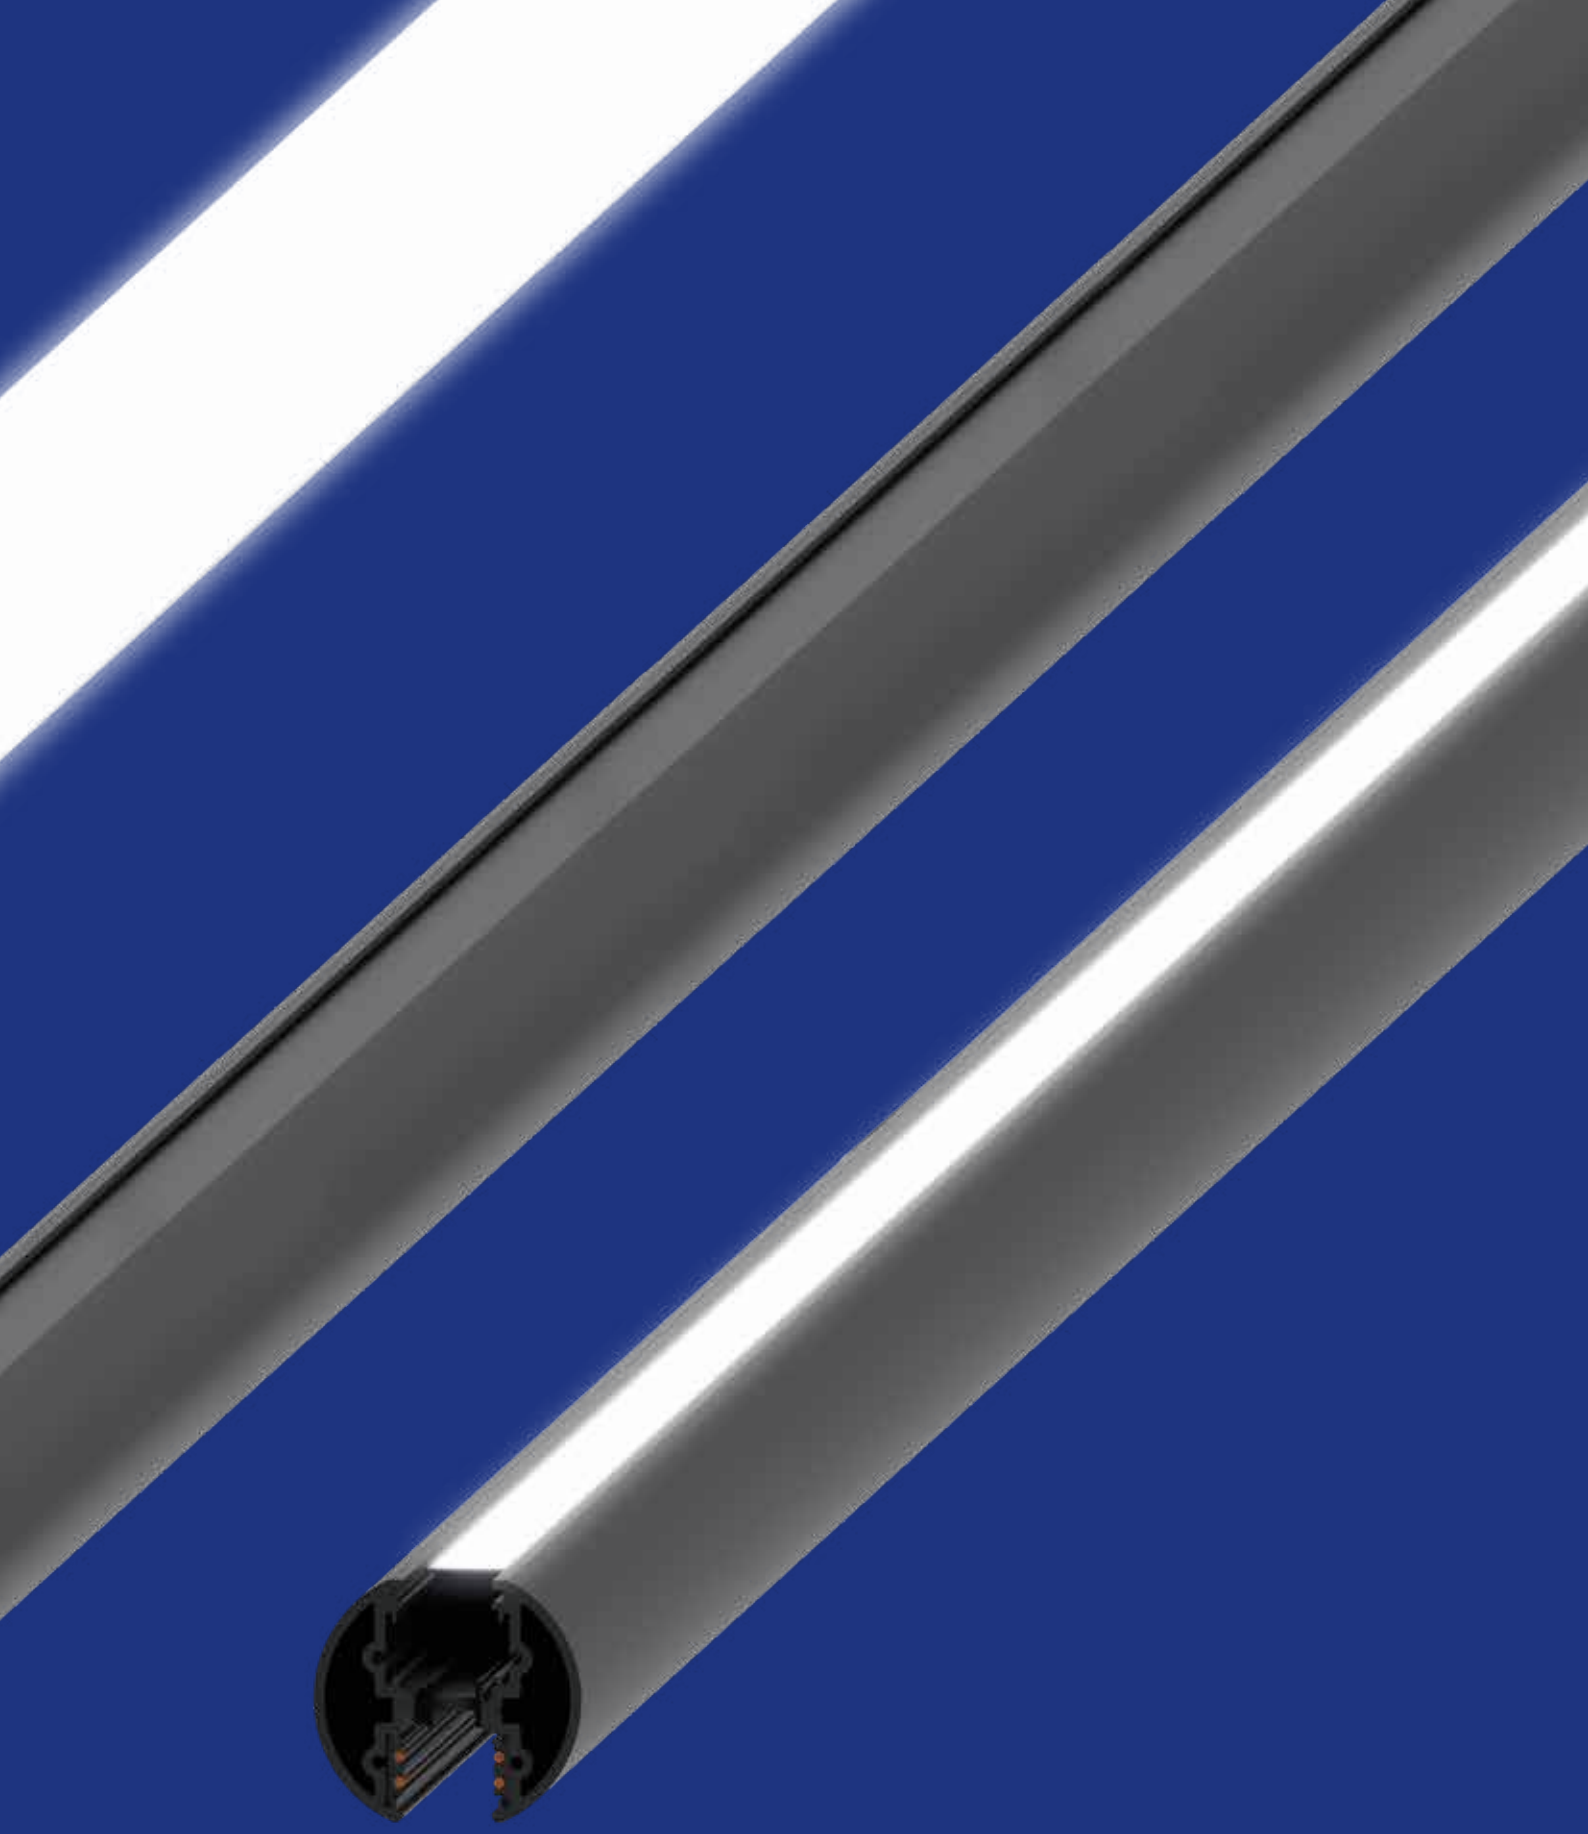


GOPLE SYSTEM
TRACK + INDIRECT EMISSION

48V

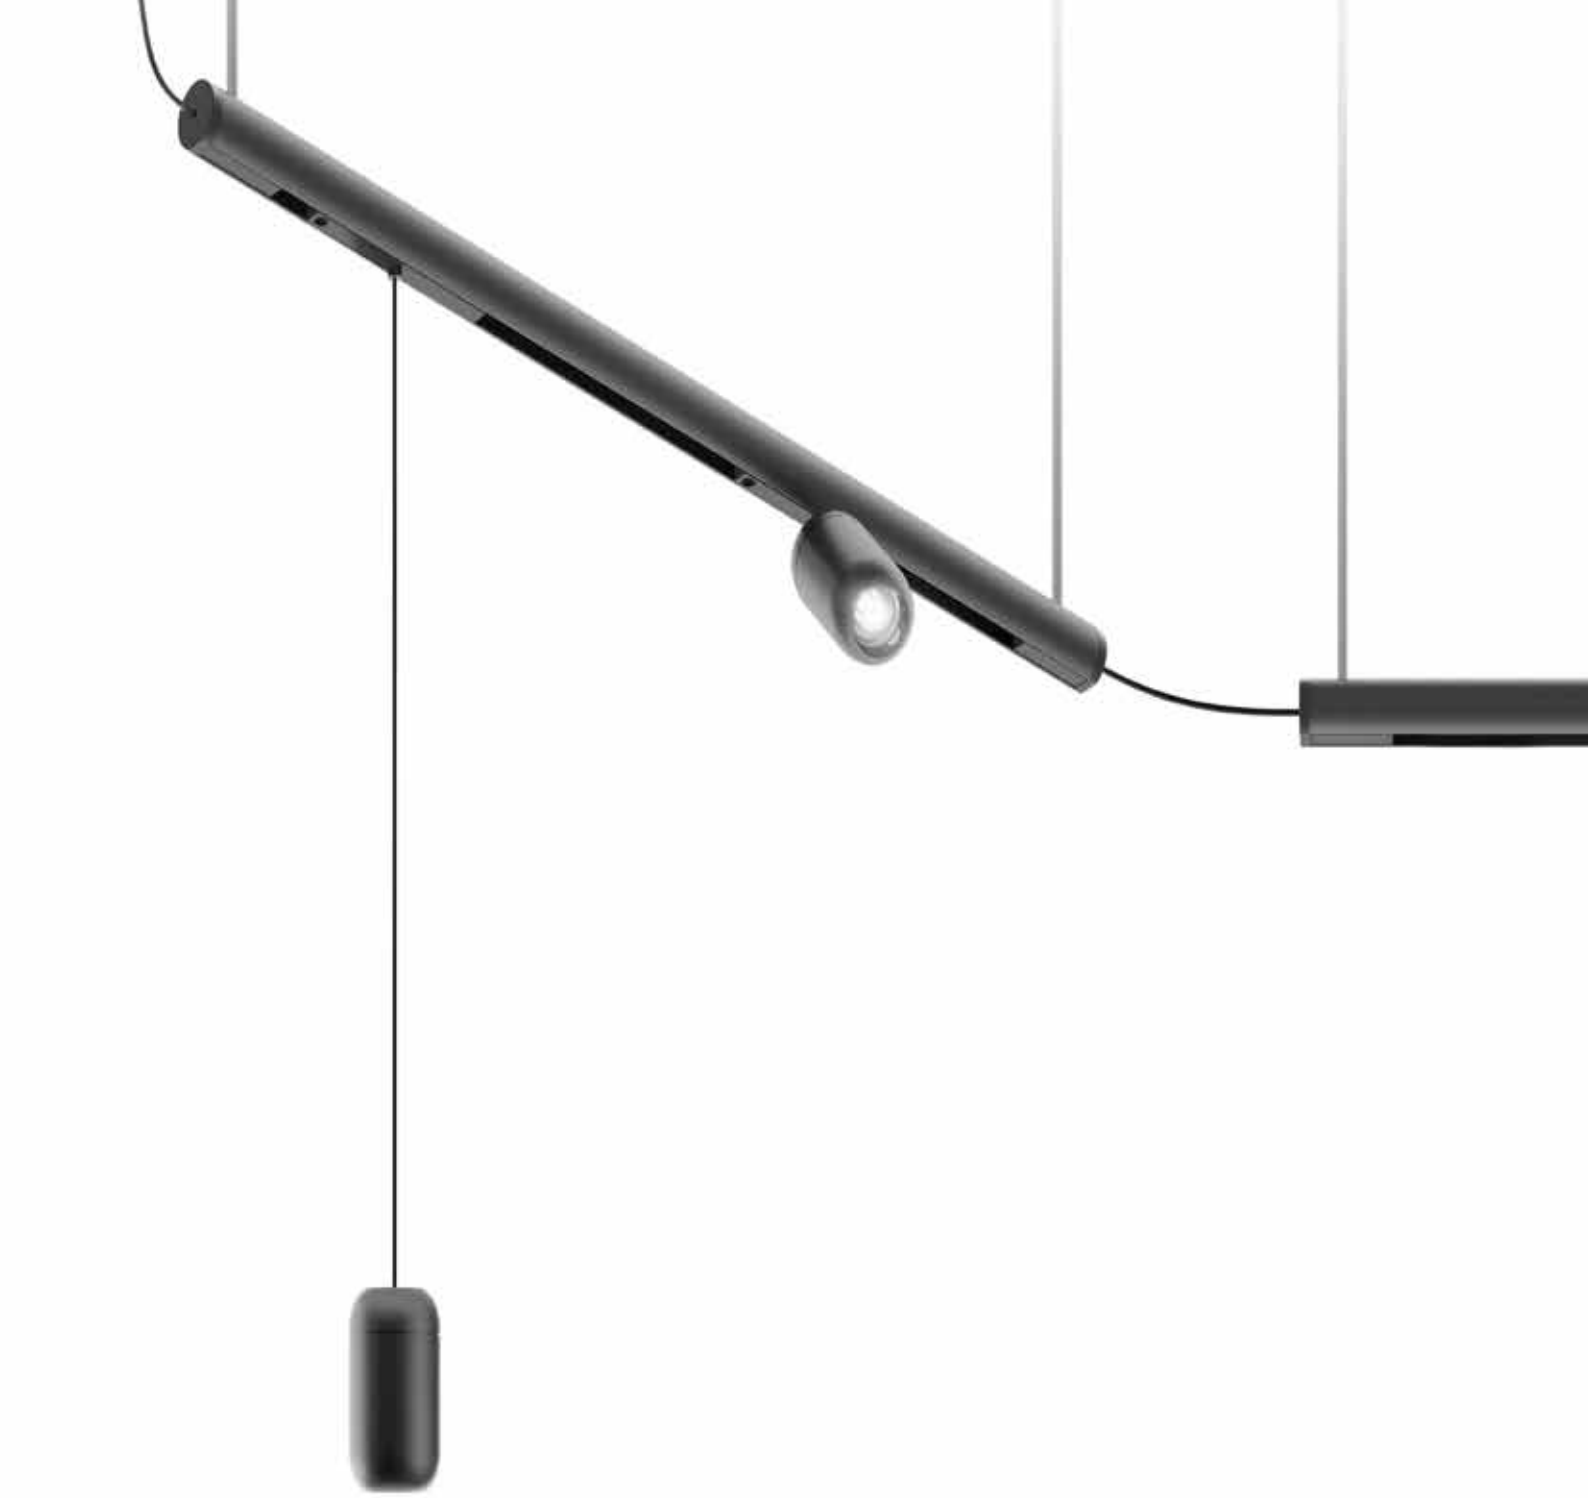

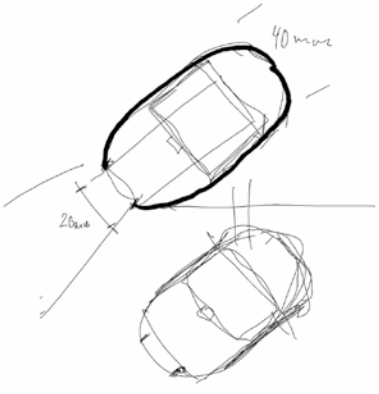
40 mm
26 mm



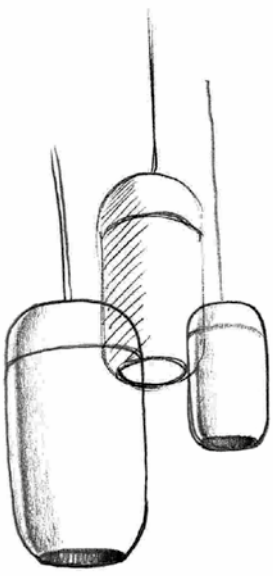

Professional performance



Gople spot offers highly professional performance within the soft geometries that remind in reduced-scale the iconic Gople diffuser.
The spotlight comes in two sizes, corresponding to different power and flux levels, each with multiple beam angles.
Artemide's expertise in managing the different qualities of light is also expressed in the ability to personalise light emissions with custom solutions, selecting the parameters of colour rendering (Gamut index and Fidelity Index) and spectrum quality dedicated to specific display situations.



Gople spot



GOPLE SPOT 60



S 14° 9W 557 lm*
F 21° 9W 598 lm*
WF 28° 9W 542 lm*



GOPLE SPOT 80



S 15° 23W 1767 lm*
F 22° 23W 1786 lm*
WF 31° 23W 1854 lm*



GOPLE SPOT PENDANT 60



S 14° 9W 557 lm*
F 21° 9W 598 lm*
WF 28° 9W 542 lm*



GOPLE SPOT PENDANT 80



S 15° 23W 1767 lm*
F 22° 23W 1786 lm*
WF 31° 23W 1854 lm*

* 3000 K Values.





Gople system
Direct Spot

90°
Joint


Alphabet of light
Linear Module



Gople system
Direct Spot + Indirect Diffused


Alphabet of light
45° Curved Module

Alphabet of light
Linear Module

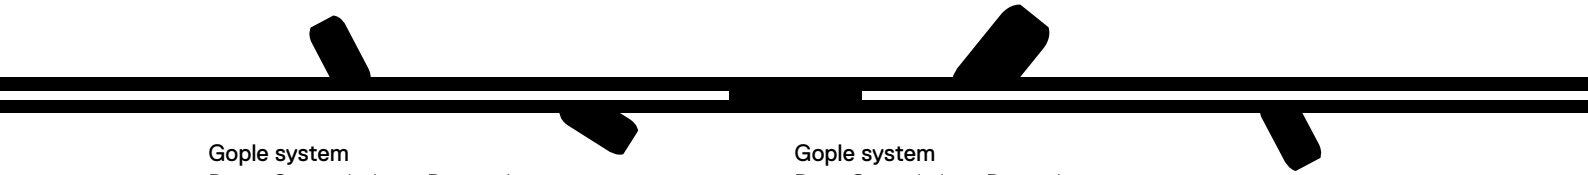

Gople system
Direct Spot + Indirect Diffused


Gople system
Direct Spot + Indirect Diffused

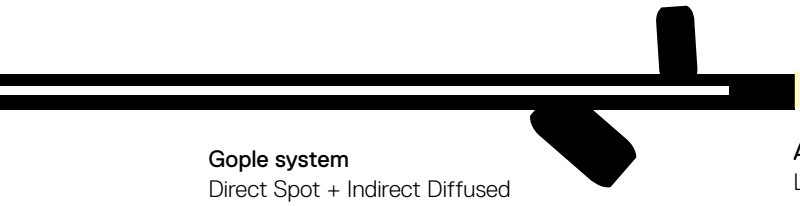


Gople system
Direct Spot + Indirect Diffused

Alphabet of light
Linear Module

Alphabet of light
Linear Module

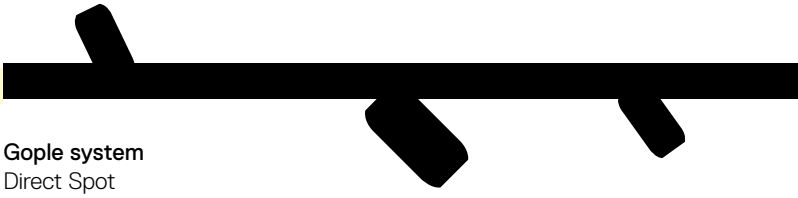

Gople system
Direct Spot

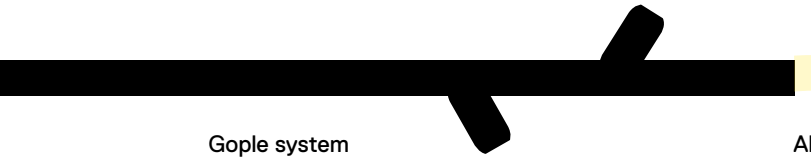

Gople system
Direct Spot


Alphabet of light
60° Curved Module

Alphabet of light
Linear Module



Gople system
Direct Spot + Indirect Diffused


Alphabet of light
90° Vertical Module

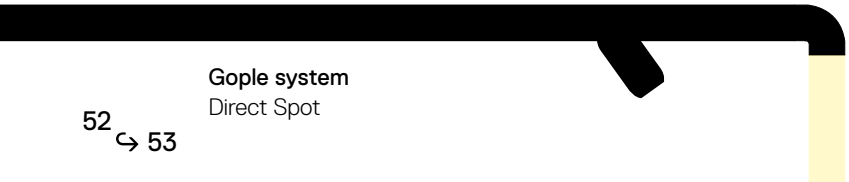

Gople system
Direct Spot


90°
Joint

Alphabet of light
Linear Module

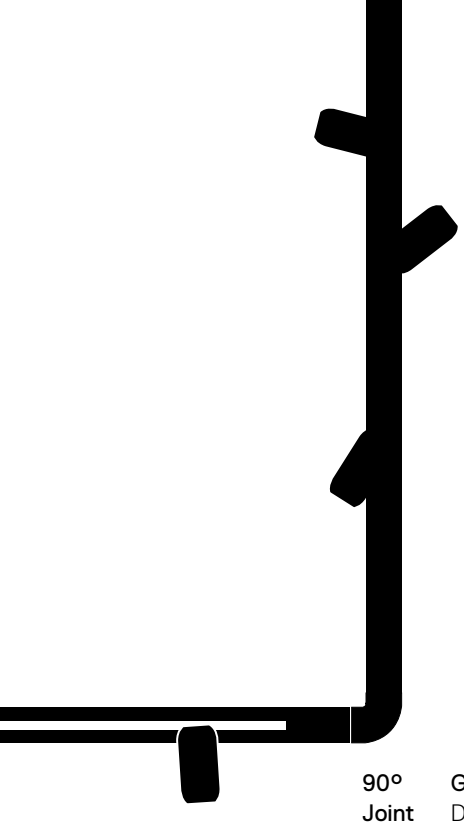


90°
Joint

Gople system
Direct Spot

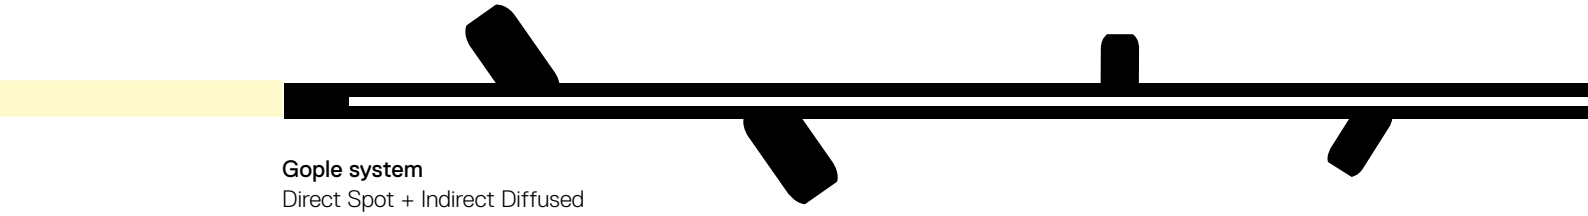

Gople system
Direct Spot + Indirect Diffused

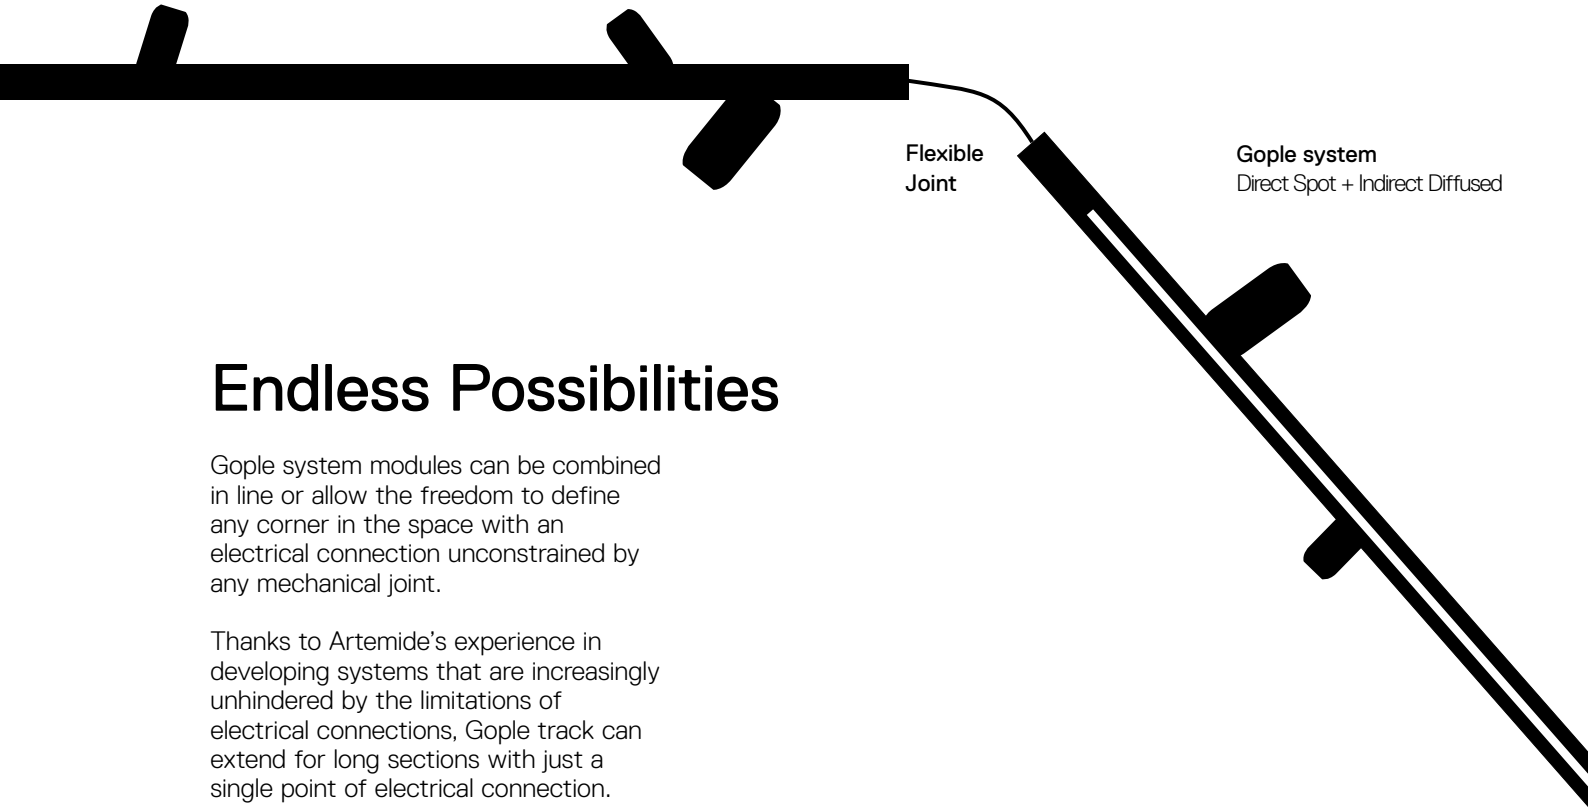

Flexible
Joint

Gople system
Direct Spot + Indirect Diffused

Endless Possibilities

Gople system modules can be combined in line or allow the freedom to define any corner in the space with an electrical connection unconstrained by any mechanical joint.

Thanks to Artemide's experience in developing systems that are increasingly unhindered by the limitations of electrical connections, Gople track can extend for long sections with just a single point of electrical connection.

On Gople system each spot can be managed separately with Artemide App to define flexible and dynamic scenarios.

White Black


01 **04**

MacAdam 3SDCM
Life L70 (20K) 102000h
CRI =90


IP20

LINEAR MODULES


Direct Track 1180 mm




Direct Track 1772 mm



Direct Track + Indirect Emission 1180 mm



Direct Track + Indirect Emission 1772 mm



LINEAR DIRECT TRACK MODULES


Suspension/Ceiling			
Length	V		Code
1180 mm	48V		**CB003**. 01/04
1772 mm	48V		**CB004**. 01/04





LINEAR DIRECT TRACK + INDIRECT LIGHT MODULES

Suspension					
Length	W	V	Flux	CCT	Code
1180 mm	16W indirect	48V	1704 lm indirect 1395 lm indirect	3000 K	**CB00601** **CB00604**
1772 mm	32W indirect	48V	3204 lm indirect 2622 lm indirect	3000 K	**CB00701** **CB00704**





GOPLE SYSTEM - POWER SUPPLY KIT

White **01** Black **04**

The APP driver can not be controlled by DALI dimming system and viceversa.

IP20



CEILING

Power supply kit	ND Code	DALI/PUSH/0-10 Code	Artemide App Code
 Ceiling Power supply kit (ND / DALI / PUSH / 0-10/ APP) 150W 400x110x49h	**CB500.** 01/04	**CB501.** 01/04	**CB501.** 01/04 **.APP**
 Ceiling Power supply kit (ND / DALI / PUSH / 0-10/ APP) 240W 400x110x49h	**CB503.** 01/04	**CB504.** 01/04	**CB504.** 01/04 **.APP**

RECESSED

Power supply kit	ND Code	DALI/PUSH/0-10 Code	Artemide App Code
 Recessed Power supply kit (ND / DALI / PUSH / 0-10/ APP) 150W 396x178x108h	**CB60001**	**CB60101**	**CB60201**
 Recessed Power supply kit (ND / DALI / PUSH / 0-10/ APP) 240W 396x178x108h	**CB60301**	**CB60401**	**CB60501**
 Recessed Power supply kit (ND / DALI / PUSH / 0-10/ APP) 320W 396x178x108h	**CB60601**	**CB60701**	**CB60801**


REMOTE

Power supply kit	DALI/PUSH/0-10 Code	Artemide App Code
 Remote power supply kit (DALI / PUSH / 0-10/APP) 240W 313x243x57,5h	**CB70001**	**CB70101**
 Remote power supply kit (DALI / PUSH / 0-10/APP) 320W 313x243x57,5h	**CB70201**	**CB70301**

Optional control devices - BLL wireless switch

	Code
 Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Max 1 m distance. Mains power supply required. To be installed inside flush mounting boxes or junction boxes.	**DV1080APP**

Gople system configuration

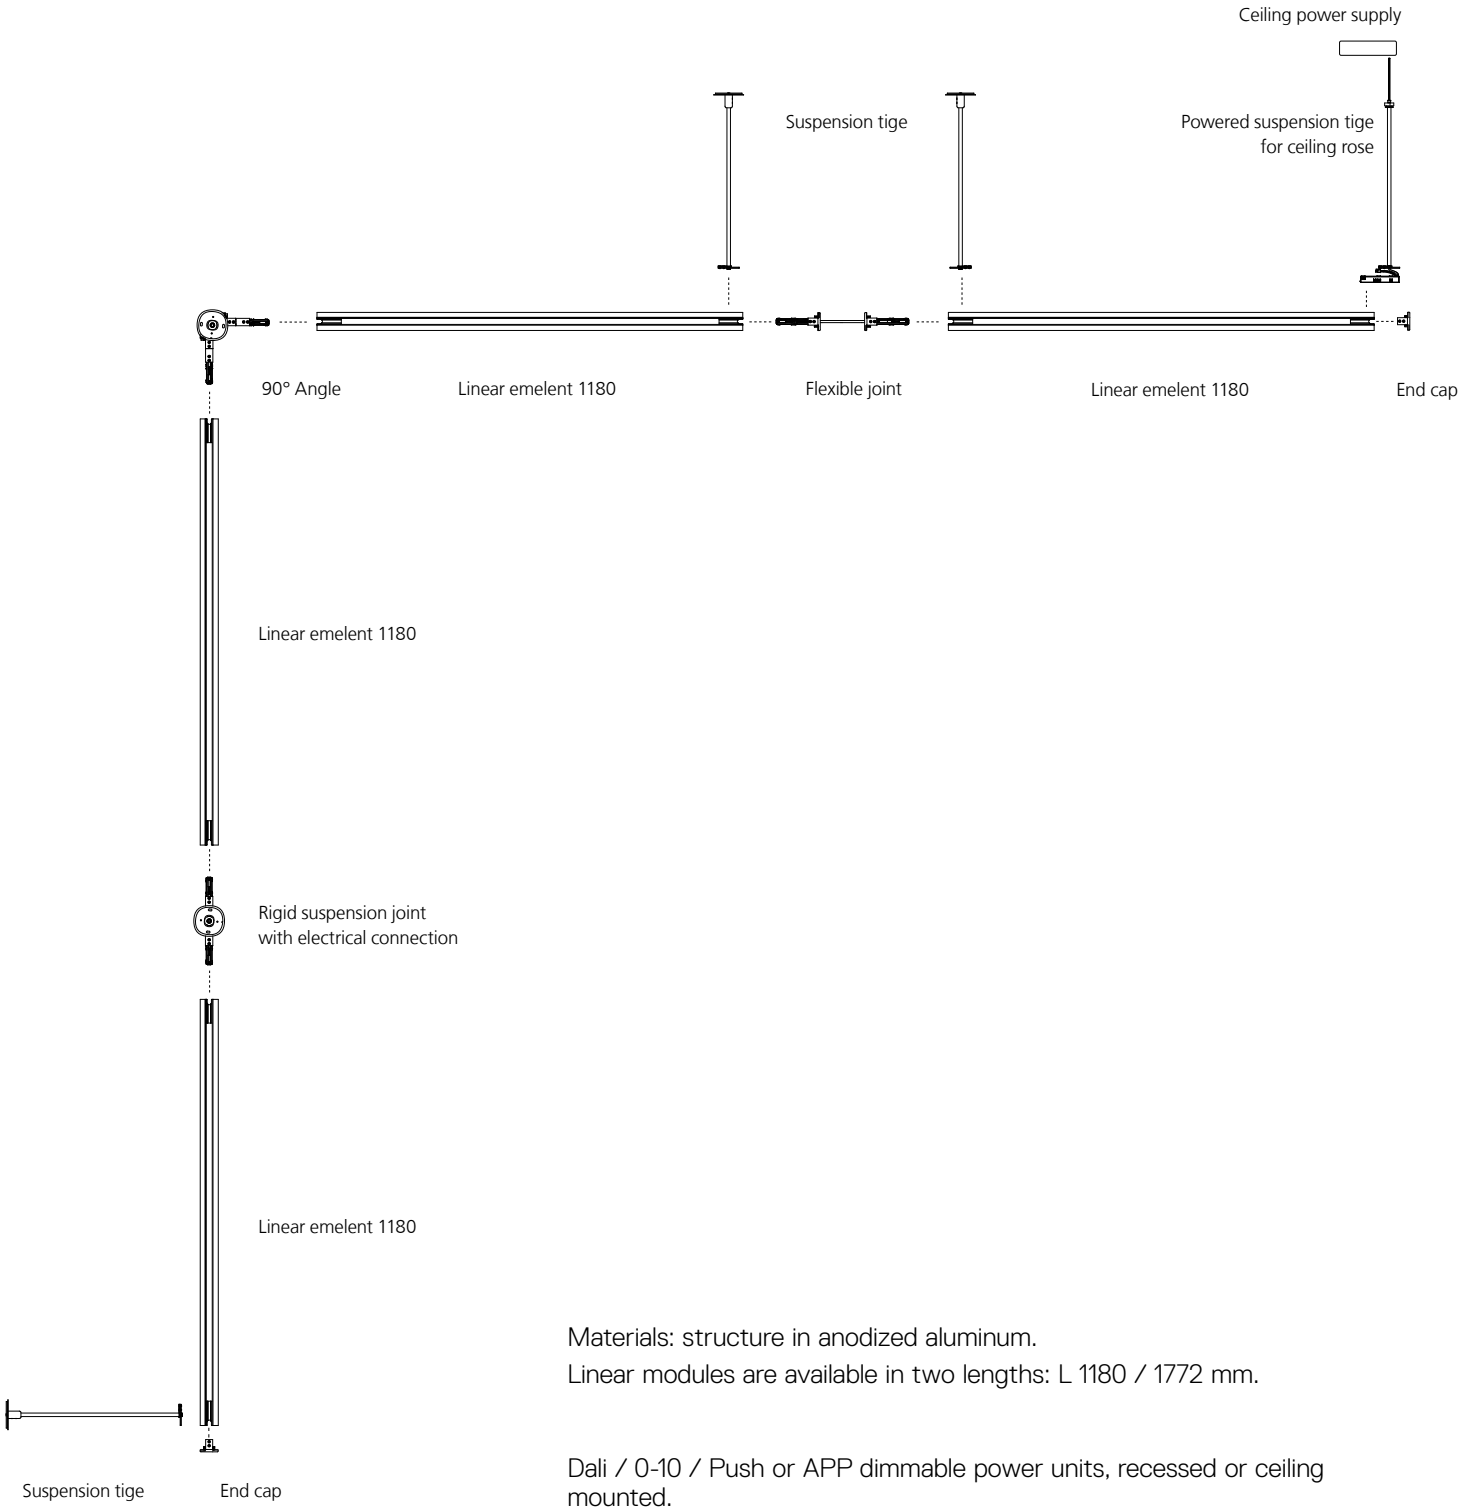

Materials: structure in anodized aluminum.
Linear modules are available in two lengths: L 1180 / 1772 mm.

Dali / 0-10 / Push or APP dimmable power units, recessed or ceiling mounted.

GOPLE SYSTEM - ACCESSORIES

White Black

01 **04**

IP20

Suspension / Ceiling accessories		Code
	End cap	**CB300.** 04
	Flexible joint	**CB207.** 04
	Rigid suspension/ceiling joint with electrical connection	**CB208.** 01/04

Suspension accessories		Code
	Powered suspension tige for ceiling rose (L=470 mm)	**CB100.** 01/04
	Powered suspension tige / ceiling mounted for recessed and remote rose (L=500 mm)	**CB102.** 01/04
	Suspension/ceiling tige	**CB103.** 01/04
	Powered suspension rigid joint for ceiling rose (L=470 mm)	**CB209.** 01/04
	Powered suspension rigid joint for recessed and remote rose (L=500 mm)	**CB212.** 01/04

Ceiling accessories		Code
	Ceiling tige with powered head	**CB101.** 01/04
	Powered ceiling tige / ceiling mounted for recessed and remote rose	**CB112.** 01/04
	Suspension/ceiling tige (L=50 mm)	**CB103.** 01/04
	Ceiling rigid joint with powered head	**CB211.** 01/04
	Powered ceiling rigid joint for recessed and remote rose	**CB213.** 01/04

GOPLE SYSTEM - 90° ANGLE

White **01** Black **04**


IP20

SUSPENSION / CEILING JOINT

90° Angle with electrical connection

Code
CB400. 01/04



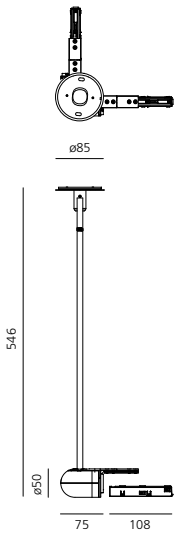


GOPLE SYSTEM + ALPHABET OF LIGHT 90° ANGLE
SUSPENSION / CEILING JOINT

90° Left Angle
(with rigid tige for suspension version and rigid tige for ceiling version)

Code
CB401. 01/04



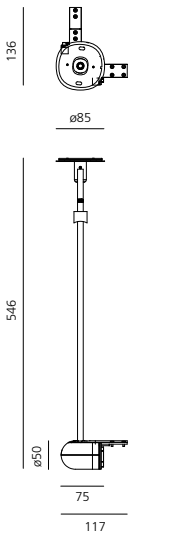


GOPLE SYSTEM + ALPHABET OF LIGHT 90° ANGLE
SUSPENSION / CEILING JOINT

90° Right Angle
(with rigid tige for suspension version and rigid tige for ceiling version)

Code
CB402. 01/04



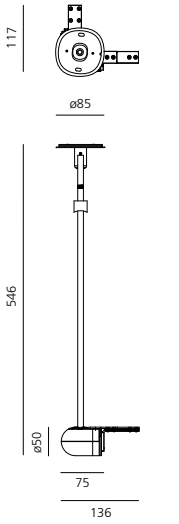



Gople spots



GOPLE SYSTEM - SPOT TRACK

White **01** Black **04**

SP FL WF

Delivery time on demand
2700K - 4000K

MacAdam 3SDCM
*MacAdam 2SDCM
CRI = 90


IP20

360°

GOPLE 60 SPOT TRACK

W	V	Beam	Flux	CCT	Dimmable DALI Code
9 W	48V	SP 14°	557 lm	2700K	**CA000.** 01/04
			557 lm	3000K	**CA010.** 01/04
			557 lm	4000K	**CA020.** 01/04
		*FL 21°	556 lm	2700K	**CA001.** 01/04
			598 lm	3000K	**CA011.** 01/04
			641 lm	4000K	**CA021.** 01/04
		*WF 28°	503 lm	2700K	**CA002.** 01/04
			542 lm	3000K	**CA012.** 01/04
			580 lm	4000K	**CA022.** 01/04






GOPLE 80 SPOT TRACK

W	V	Beam	Flux	CCT	Dimmable DALI Code
19 W	48V	SP 17°	1739 lm	2700K	**CA100.** 01/04
			1837 lm	3000K	**CA110.** 01/04
			1986 lm	4000K	**CA120.** 01/04
		FL 23°	1779 lm	2700K	**CA101.** 01/04
			1879 lm	3000K	**CA111.** 01/04
			2031 lm	4000K	**CA121.** 01/04
		WF 31°	1845 lm	2700K	**CA102.** 01/04
			1949 lm	3000K	**CA112.** 01/04
			2107 lm	4000K	**CA122.** 01/04






GOPLE 60 SPOT PENDANT TRACK

W	V	Beam	Flux	CCT	Dimmable DALI Code
9 W	48V	SP 14°	557 lm	2700K	**CA200.** 01/04
			557 lm	3000K	**CA210.** 01/04
			557 lm	4000K	**CA220.** 01/04
		*FL 21°	556 lm	2700K	**CA201.** 01/04
			598 lm	3000K	**CA211.** 01/04
			641 lm	4000K	**CA221.** 01/04
		*WF 28°	503 lm	2700K	**CA202.** 01/04
			542 lm	3000K	**CA212.** 01/04
			580 lm	4000K	**CA222.** 01/04






GOPLE 80 SPOT PENDANT TRACK

W	V	Beam	Flux	CCT	Dimmable DALI Code
19 W	48V	SP 17°	1739 lm	2700K	**CA300.** 01/04
			1837 lm	3000K	**CA310.** 01/04
			1986 lm	4000K	**CA320.** 01/04
		FL 23°	1779 lm	2700K	**CA301.** 01/04
			1879 lm	3000K	**CA311.** 01/04
			2031 lm	4000K	**CA321.** 01/04
		WF 31°	1845 lm	2700K	**CA302.** 01/04
			1949 lm	3000K	**CA312.** 01/04
			2107 lm	4000K	**CA322.** 01/04





Alphabet of light & Gople system Joints



ALPHABET OF LIGHT AND GOPLE SYSTEM - JOINTS

White Black

01 **04**


IP20

JOINTS


		Code
01	→ Linear - linear joint	**CB200.** 01/04
02	→ Linear - curve 45° right joint	**CB201.** 01/04
03	→ Linear - curve 45° left joint	**CB202.** 01/04
04	→ Linear - curve 60° right joint	**CB203.** 01/04
05	→ Linear - curve 60° left joint	**CB204.** 01/04
06	→ Linear - curve up joint	**CB205.** 01/04
07	→ Linear - curve down joint	**CB206.** 01/04
08	→ Linear - curve 90° right joint	**CB307.** 01/04
09	→ Linear - curve 90° left joint	**CB306.** 01/04



Code CB200.01/04_JOINT 1
→ LINEAR - LINEAR JOINT



Code CB201.01/04_JOINT 2
→ LINEAR - CURVE 45° RIGHT JOINT



Code CB202.01/04_JOINT 3
→ LINEAR - CURVE 45° LEFT JOINT



Code CB203.01/04_JOINT 4
→ LINEAR - CURVE 60° RIGHT JOINT



Code CB204.01/04_JOINT 5
→ LINEAR - CURVE 60° LEFT JOINT



Code CB205.01/04_JOINT 6
→ LINEAR - CURVE UP JOINT



Code CB206.01/04_JOINT 7
→ LINEAR - CURVE DOWN JOINT





Code CB306.01/04_JOINT 8
→ LINEAR - CURVE 90° RIGHT JOINT




Code CB307.01/04_JOINT 9
→ LINEAR - CURVE 90° LEFT JOINT

Alphabet of light & Gople system configuration

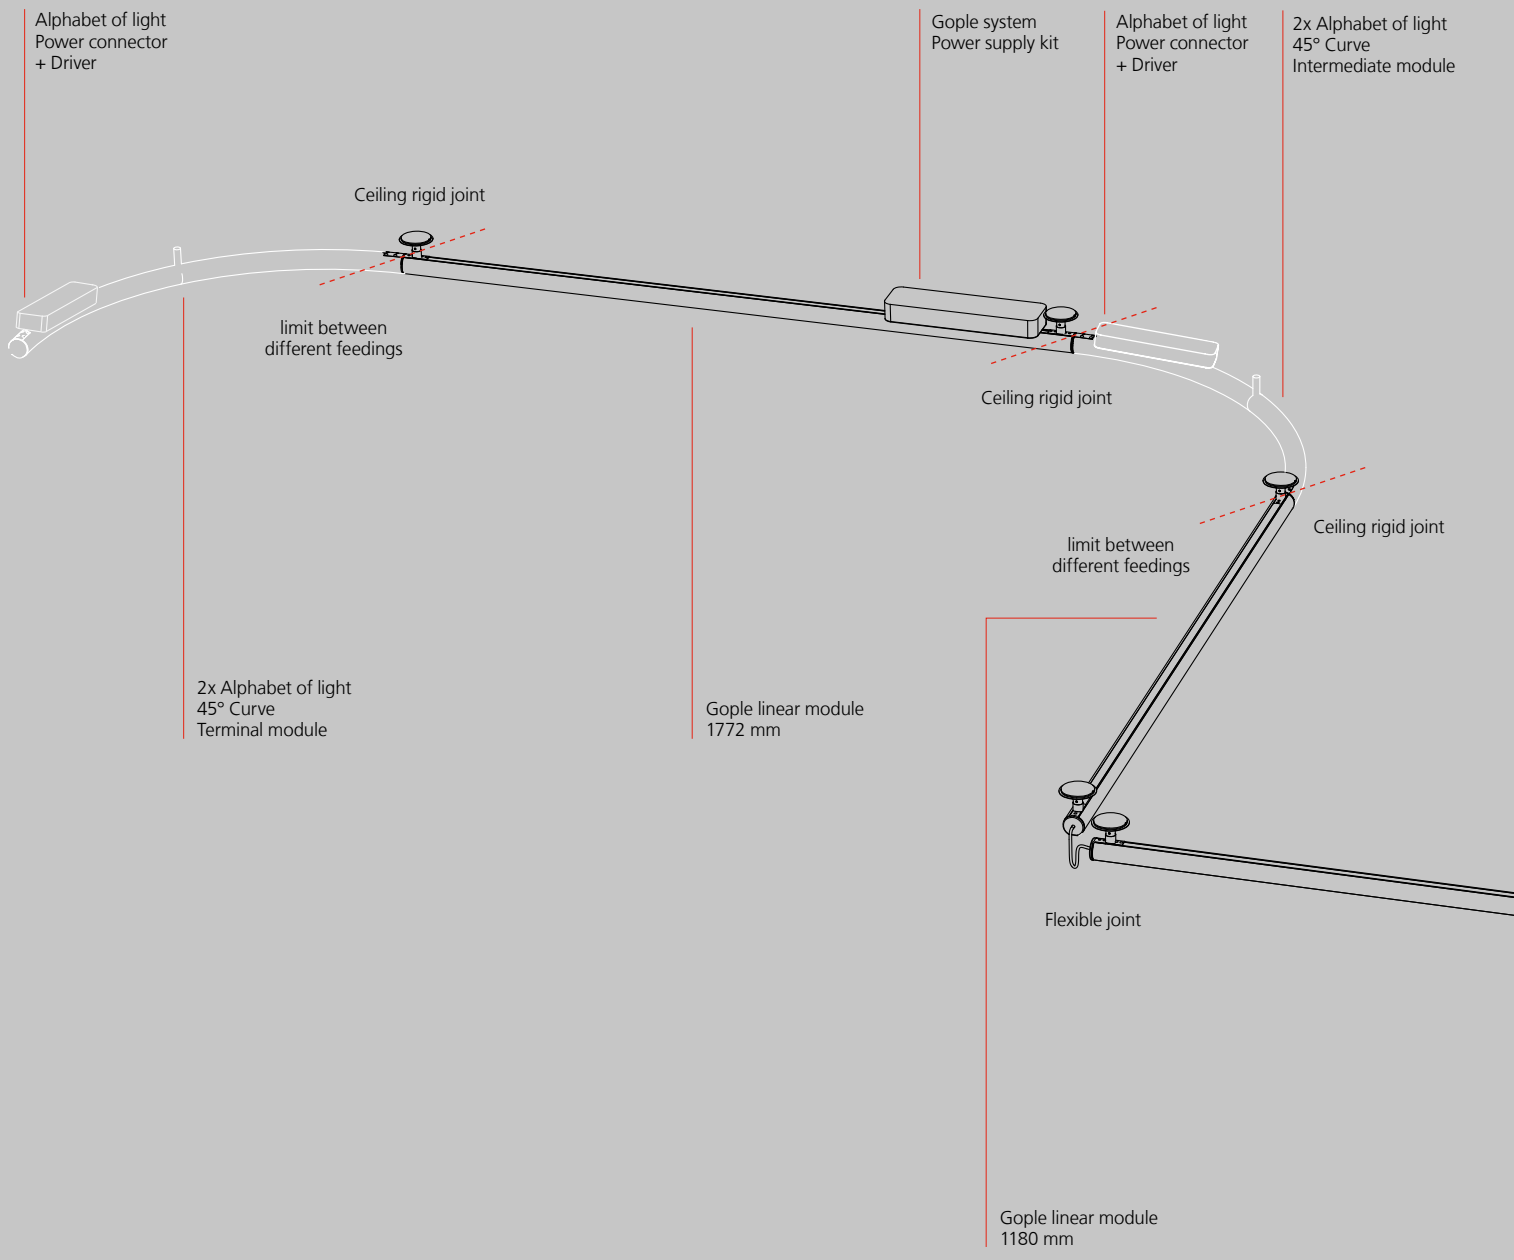


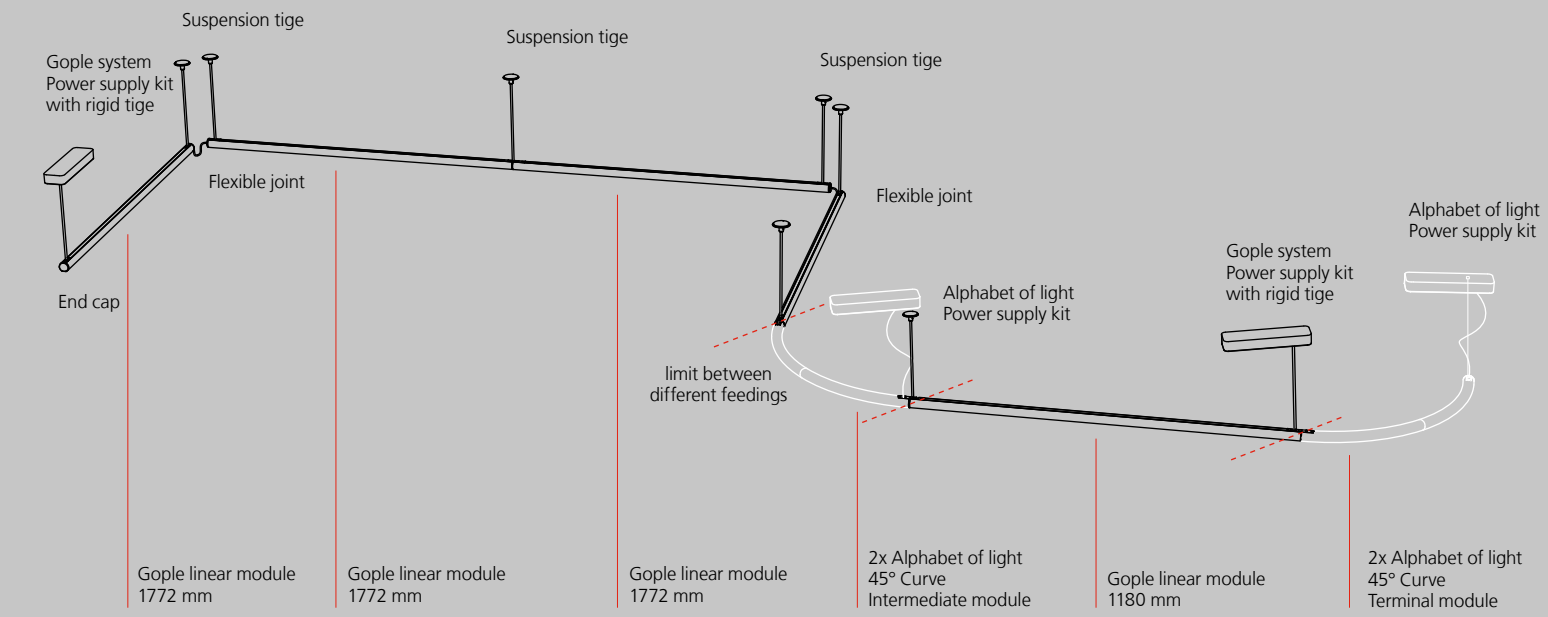
Suspension tige
Suspension tige
Suspension tige
Gople system
Power supply kit
with rigid tige
Flexible joint
Flexible joint
End cap
Alphabet of light
Power supply kit
Gople system
Power supply kit
with rigid tige
Alphabet of light
Power supply kit
limit between
different feedings
Gople linear module
1772 mm
Gople linear module
1772 mm
Gople linear module
1772 mm
2x Alphabet of light
45° Curve
Intermediate module
Gople linear module
1180 mm
2x Alphabet of light
45° Curve
Terminal module

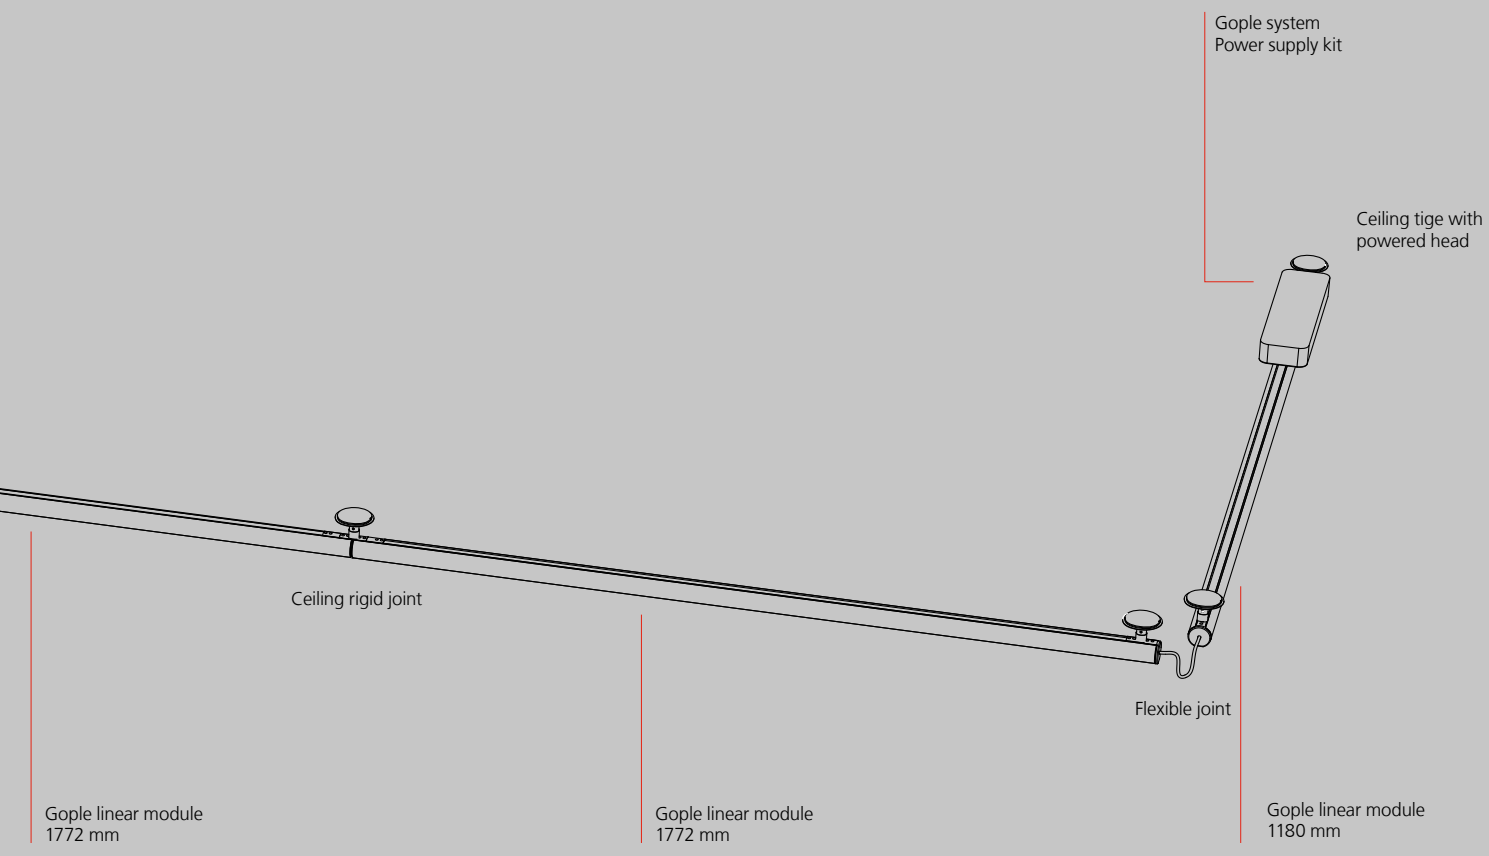
Gople system
Power supply kit
Ceiling tige with
powered head
Ceiling rigid joint
Flexible joint
Gople linear module
1772 mm
Gople linear module
1772 mm
Gople linear module
1180 mm


2
FEB
SUN



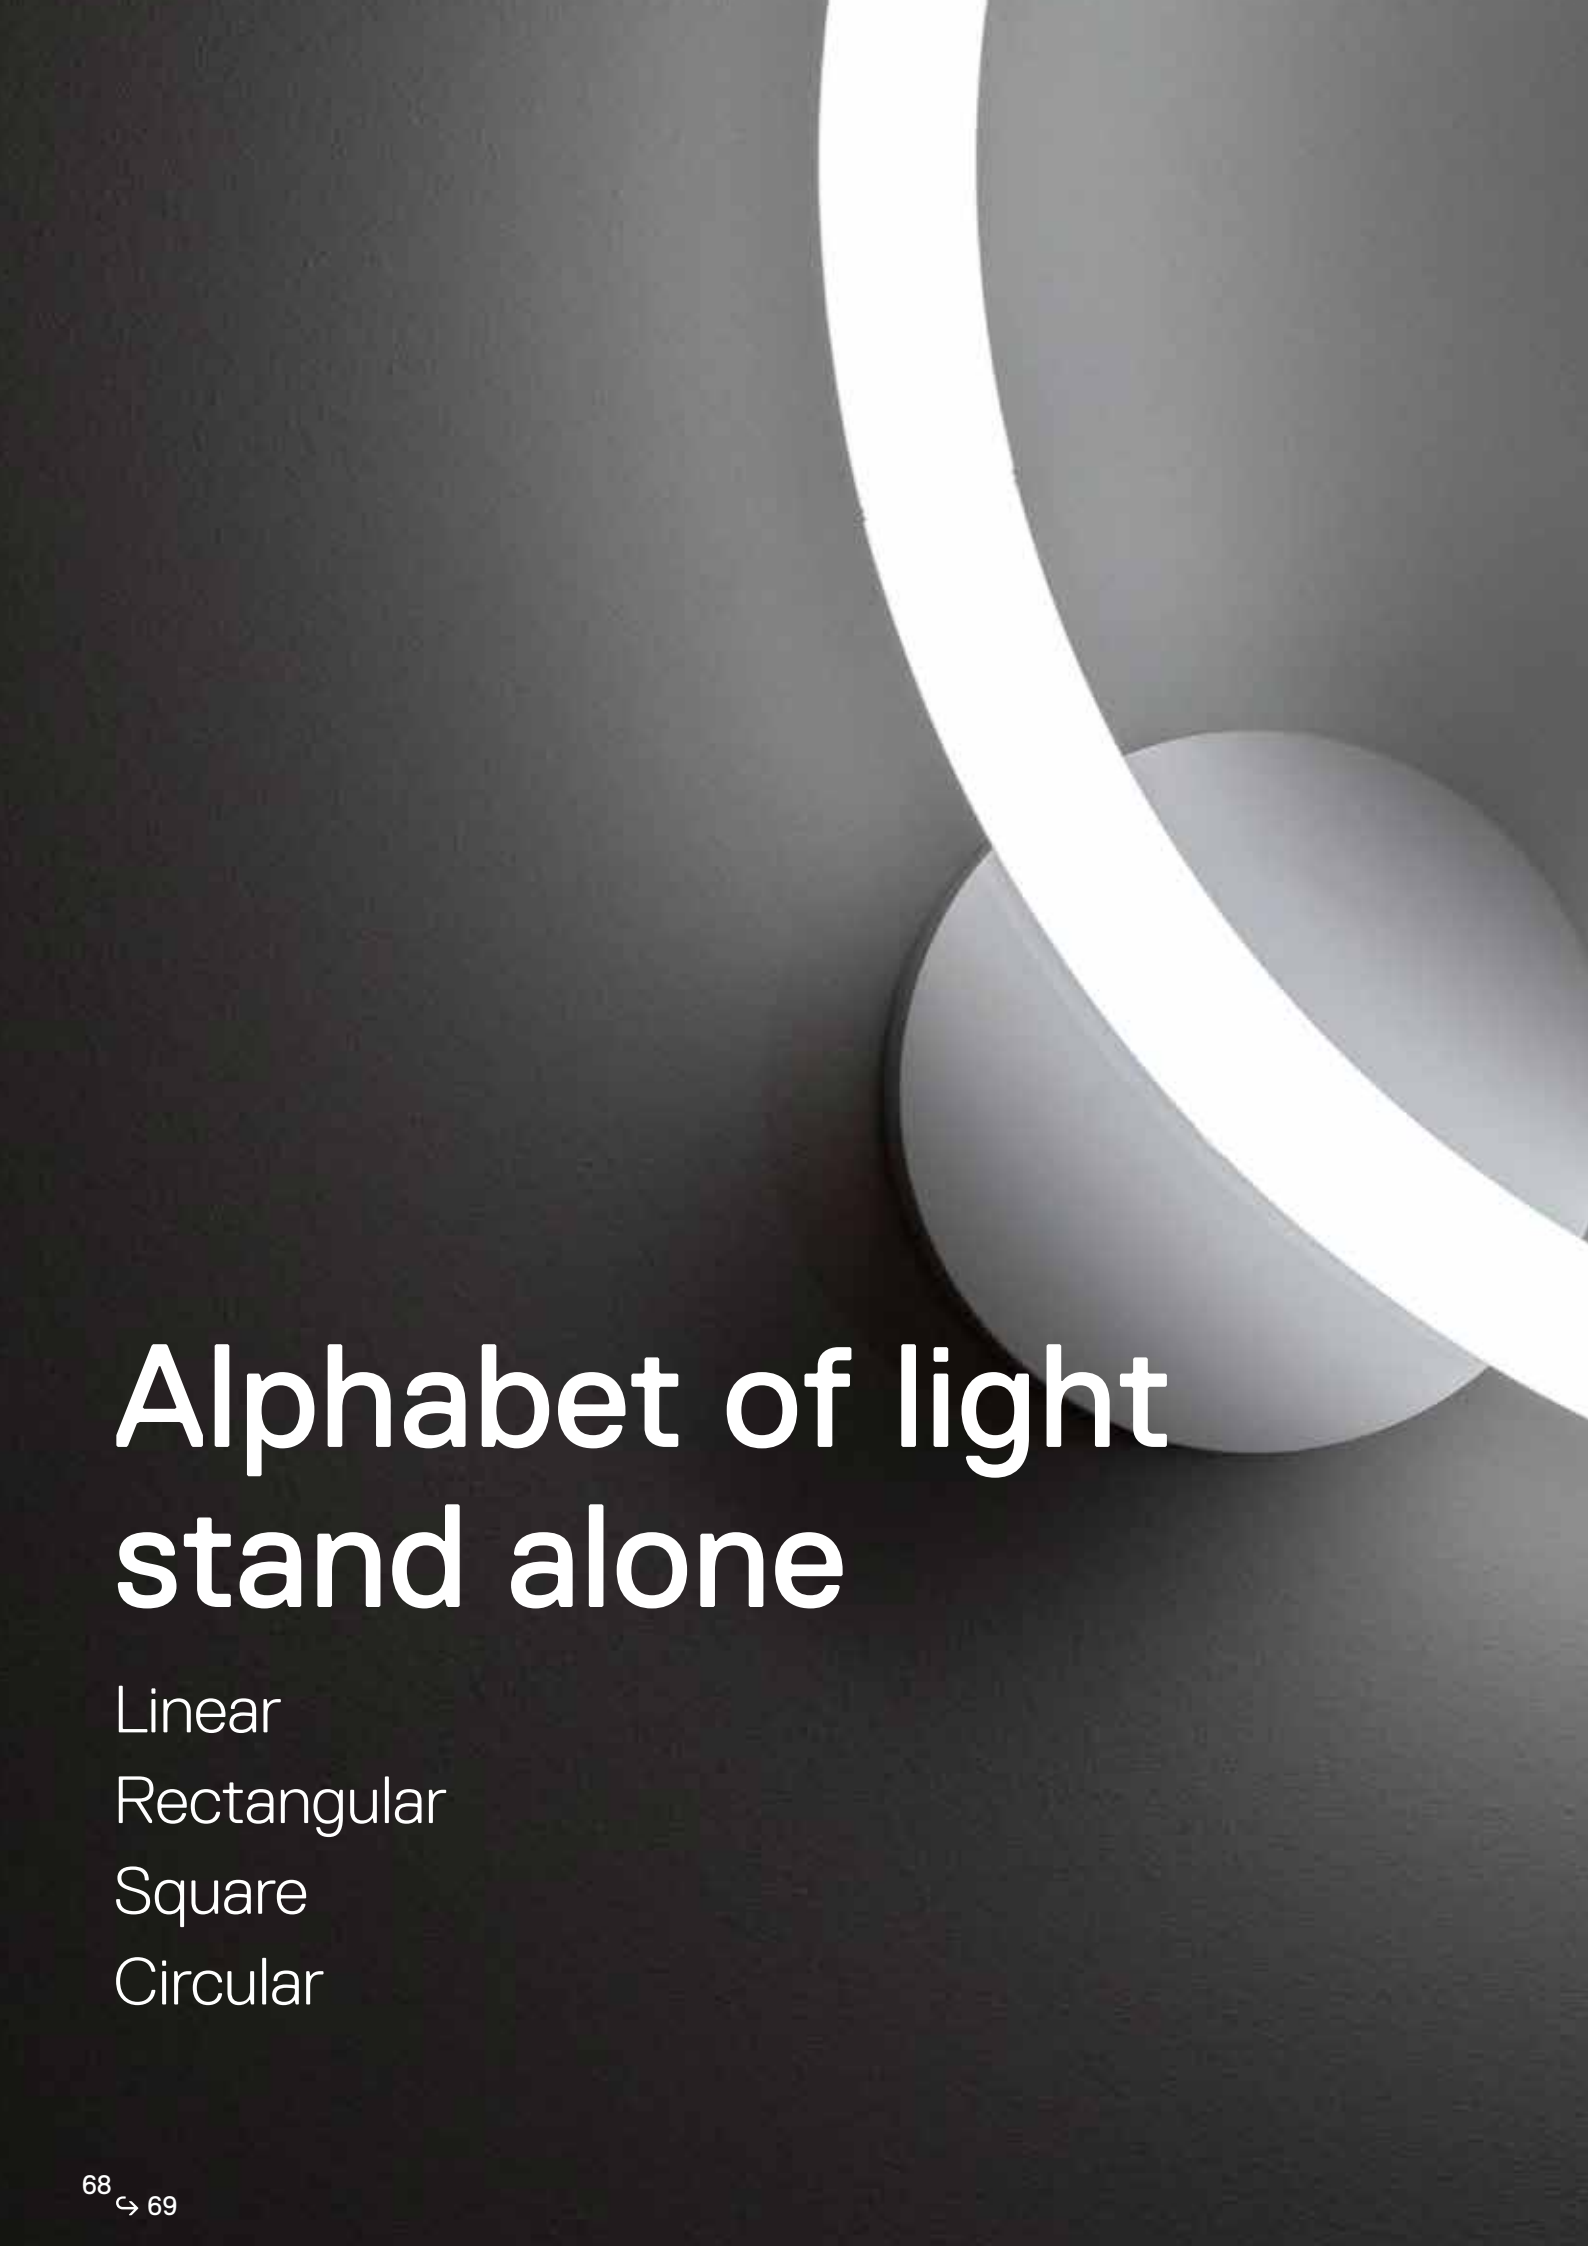

Alphabet of light stand alone

Linear
Rectangular
Square
Circular



PATENT OF INVENTION: MECHANICAL AND ELECTRICAL CONNECTION
PATENT OF INVENTION: OPTICS

ARTEMIDE
APP



Offices, Milan, Italy, ph. Federico Villa | 2021

Materials: structure in anodized natural aluminum,
tube in white diffusing PMMA.
Linear modules are available in lengths: 1200 / 1800 / 2400 mm.
Rectangualr modules are available in size: 1911 x 1321 mm.
Square modules are available in size: 1321 / 1911 mm
Circular modules are available in diameters: ø tot 900 / 1550 / 3500 mm



ALPHABET OF LIGHT - LINEAR

Opal White

XF

*EPD compliance
EPDITALY0430
12/05/2023
www.epditaly.it

MacAdam 3SDCM
Life L70 (10K) 60000h
CRI =90

IP20

WALL/CEILING

	W	Flux	CCT	DALI / PUSH Code	APP & PUSH Code
Linear 120	35 W	3480 lm	3000K	**1304000A**	**1304000APP**
Linear 180	50 W	5226 lm	3000K	**1305000A**	**1305000APP**
Linear 240	63 W	6968 lm	3000K	**1308000A**	**1308000APP**






SUSPENSION

	W	Flux	CCT	DALI / PUSH Code	APP / PUSH Code
Linear 120	26 W	3484 lm	3000K	**1204000A**	**1204000APP**
Linear 180	39 W	5226 lm	3000K	**1205000A**	**1205000APP**
Linear 240	52 W	6968 lm	3000K	**1208000A**	**1208000APP***



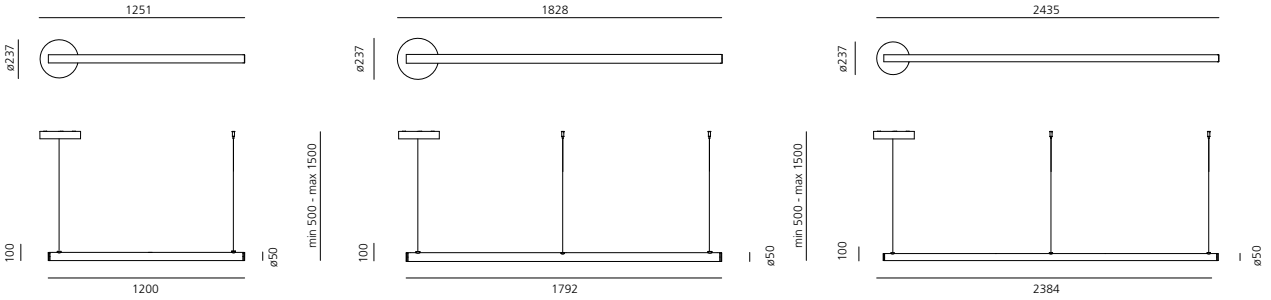

	Code
4.5 m extension feeding cable + 3 suspension wires L=6m for AoL linear 120/180/240	**1209000A**

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

Code
DV1080APP

ALPHABET OF LIGHT - LINEAR

Opal White

XF

Constant current SELV
driver supplied separately


MacAdam 3SDCM
Life L70 (10K) 60000h
CRI =90

IP20

WALL/CEILING SEMI-RECESSED

	I	W	Flux	CCT	Code
Linear 120	800mA	23 W	3484 lm	3000K	**1425000A**
Linear 180	1050mA	35 W	5226 lm	3000K	**1426000A**
Linear 240	1400mA	47 W	6968 lm	3000K	**1427000A**



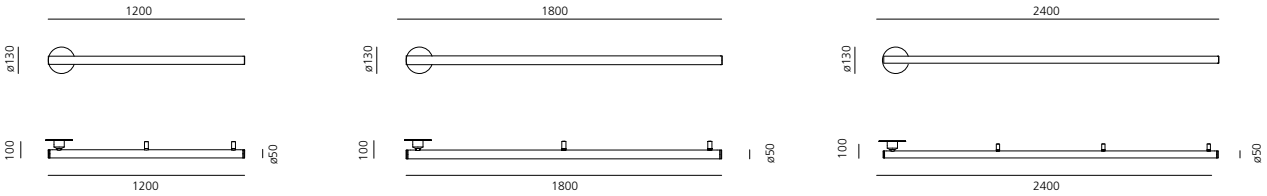

Model	Driver	Vac	Pw	Lmm	Wmm	Hmm		Code
Linear 120	CC 800mA	220-240	35	124	80	22	DALI / 1-10 / PUSH	**DV1035**
Linear 120	CC 800mA	220-240	35	124	80	22	APP / PUSH	**DV1035APP**
Linear 180	CC 1200mA	220-240	50	124	80	22	DALI / 1-10 / PUSH	**DV1035**
Linear 180	CC 1200mA	220-240	50	124	80	22	APP / PUSH	**DV1035APP**
Linear 240	CC 1600mA	220-240	63	130	76	30	DALI / 1-10 / PUSH	**DV1034**
Linear 240	CC 1600mA	220-240	63	130	76	30	APP / PUSH	**DV1034APP**





"GAGARIN" International Airport VIP Zone, Yaroslavl, Russia. Sergey Ananyev | 2019

Luca Faloni, Munich, Germany | 2022



Casa Caleido, Verona, Italy, ph. Beppe Brancato | 2023

Opal White

XF


MacAdam 3SDCM
Life L70 (10K) 60000h
CRI =90


IP20

SQUARE WALL/CEILING

	W	Flux	CCT	DALI / PUSH Code	APP & PUSH Code
Square 120	100 W	9488 lm	3000K	**1430210A**	**1430210APP**
Square 180	145 W	14020 lm	3000K	**1430220A**	**1430220APP**



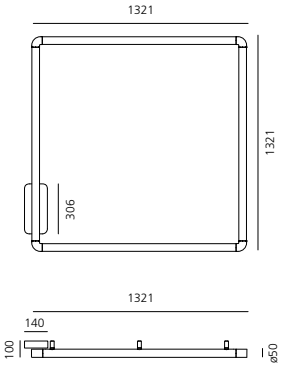


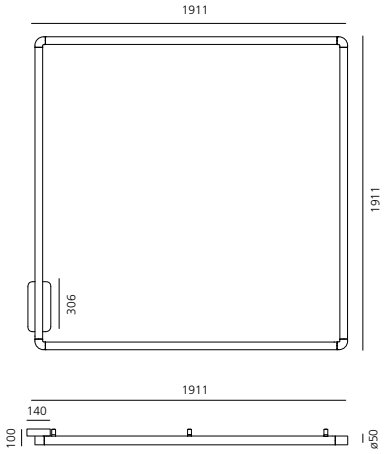

RECTANGULAR WALL/CEILING

	W	Flux	CCT	DALI / PUSH Code	APP & PUSH Code
Rectangular	120 W	11754 lm	3000K	**1430230A**	**1430230APP**
	125 W	11754 lm	3000K		



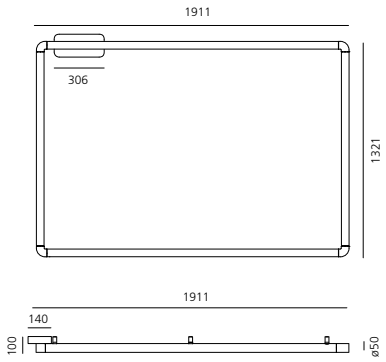

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

Code
DV1080APP

ALPHABET OF LIGHT - RECTANGULAR/SQUARE

Opal White


XF


MacAdam 3SDCM
Life L70 (10K) 60000h
CRI =90

IP20

SQUARE SUSPENSION

	W	Flux	CCT	DALI / PUSH Code	APP & PUSH Code
Square 120	100 W	9488 lm	3000K	**1430010A**	**1430010APP**
Square 180	145 W	14020 lm	3000K	**1430020A**	**1430020APP**




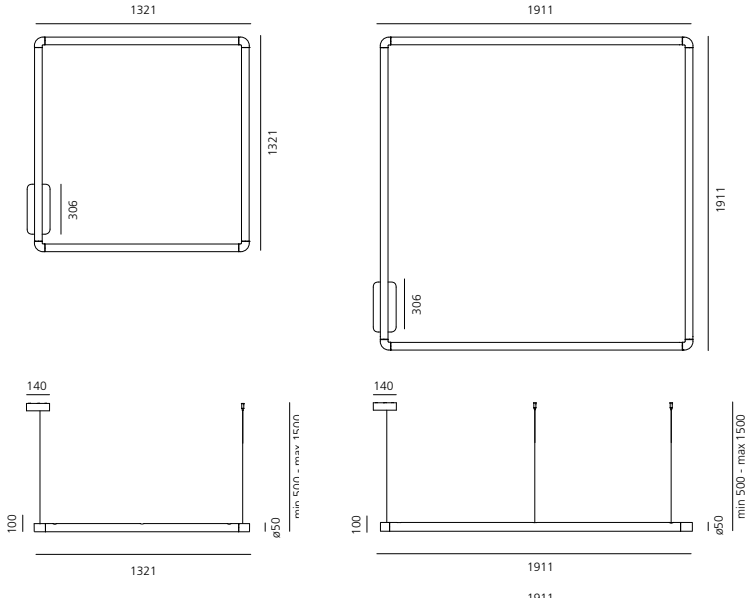

RECTANGULAR SUSPENSION

	W	Flux	CCT	DALI / PUSH Code	APP & PUSH Code
Rectangular	120 W	11754 lm	3000K	**1430030A**	
	125 W	11754 lm	3000K		**1430030APP**



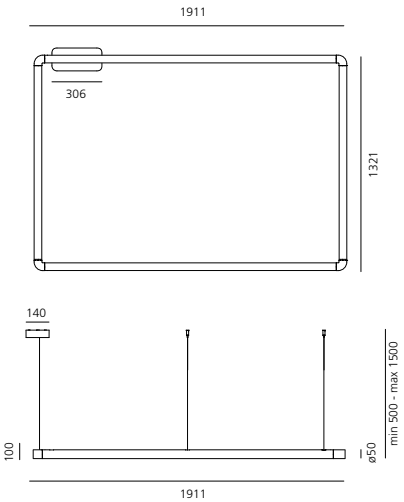

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

Code
DV1080APP

ALPHABET OF LIGHT - RECTANGULAR/SQUARE

Opal White


XF


MacAdam 3SDCM
Life L70 (10K) 60000h
CRI =90


IP20

SQUARE WALL/CEILING SEMI-RECESSED

	W	Flux	CCT	Code
Square 120	90 W	9488 lm	3000K	**1430110A**
Square 180	138 W	14020 lm	3000K	**1430120A**






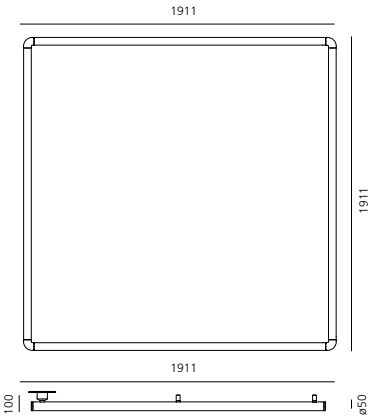

RECTANGULAR WALL/CEILING SEMI-RECESSED

	W	Flux	CCT	Code
Rectangular	114 W	11754 lm	3000K	**1430130A**



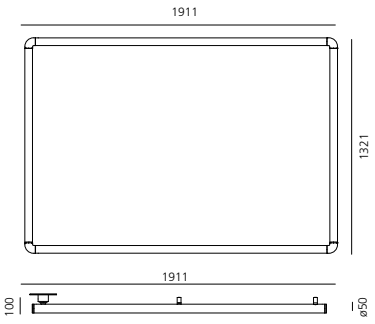

Wall/Ceiling Semi-recessed Power Units


	Code
Dali / Push remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)	**2271010A**
APP remote power unit box (175W, 220-240VAC, L=306, W=140, H=44)	**2271010APP**

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

Code
DV1080APP

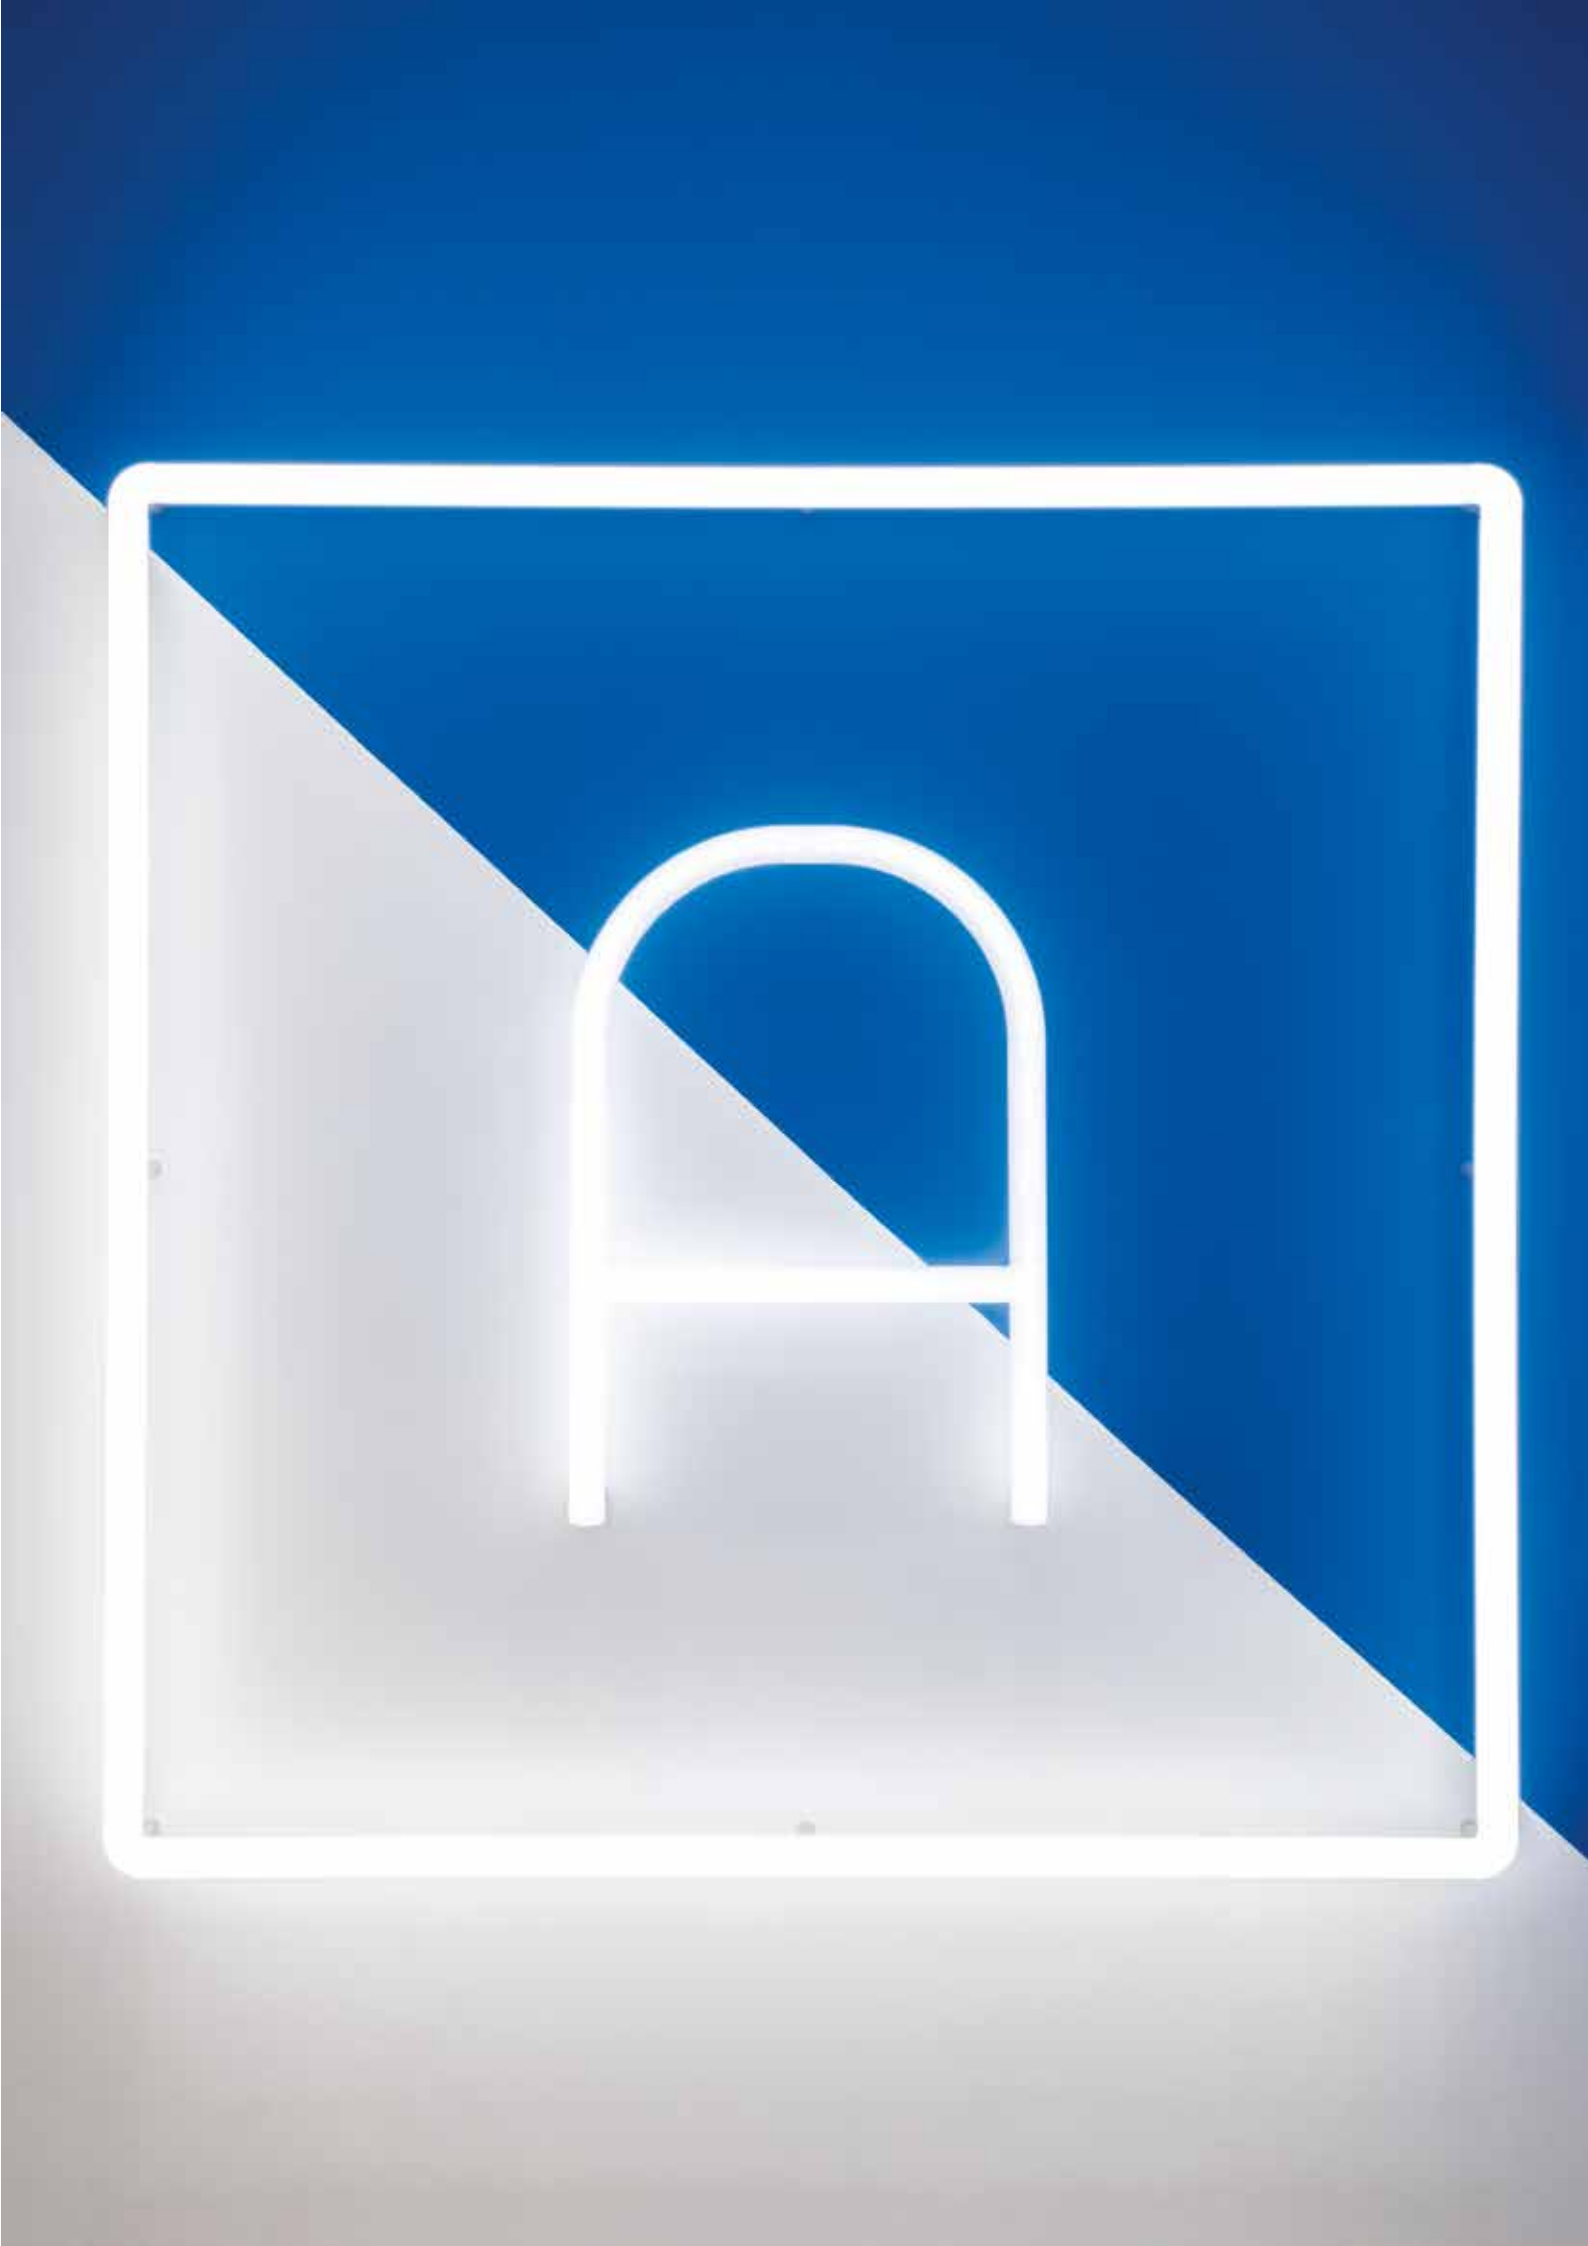



La Biennale di Venezia, "Robin Hood Gardens: A Ruin in Reverse" Exhibition, | 2018



International School Rheintal, Buch, Switzerland ph. Linus Lintner |2023





Giuntini Offices, Peccioli (PI), Italy, Ph. Piero Savorelli | 2020

ALPHABET OF LIGHT - CIRCULAR

Opal White

XF


MacAdam 3SDCM
Life L70 (10K) 60000h
CRI =90


IP20


WALL/CEILING

	W	Flux	CCT	DALI / PUSH Code	APP & PUSH Code
Circular ø 90	44 W	5783 lm	3000K	**1306000A**	**1306000APP**
Circular ø155	78 W	10280 lm	3000K	**1307000A**	**1307000APP**
Circular ø350	156 W	20953 lm	3000K	**1214000A**	**1214000APP**





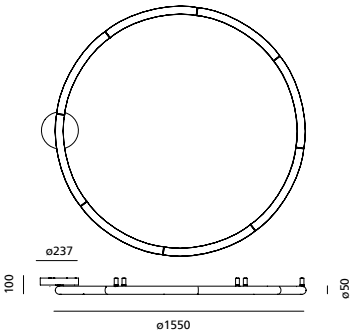

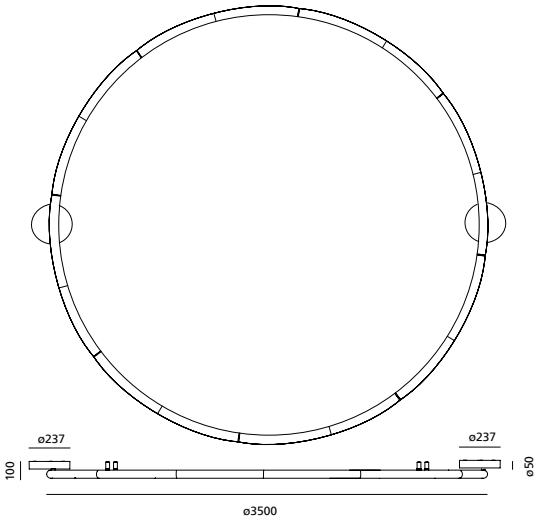

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

Code
DV1080APP

ALPHABET OF LIGHT - CIRCULAR

Opal White

XF

Constant current SELV
driver supplied separately


MacAdam 3SDCM
Life L70 (10K) 60000h
CRI =90

IP20

WALL/CEILING SEMI-RECESSED

	W	Flux	CCT	Code
Circular ø 90	44 W	5783 lm	3000K	**1428000A**
Circular ø155	78 W	10280 lm	3000K	**1429000A**
Circular ø350	156 W	20953 lm	3000K	**1215000A**



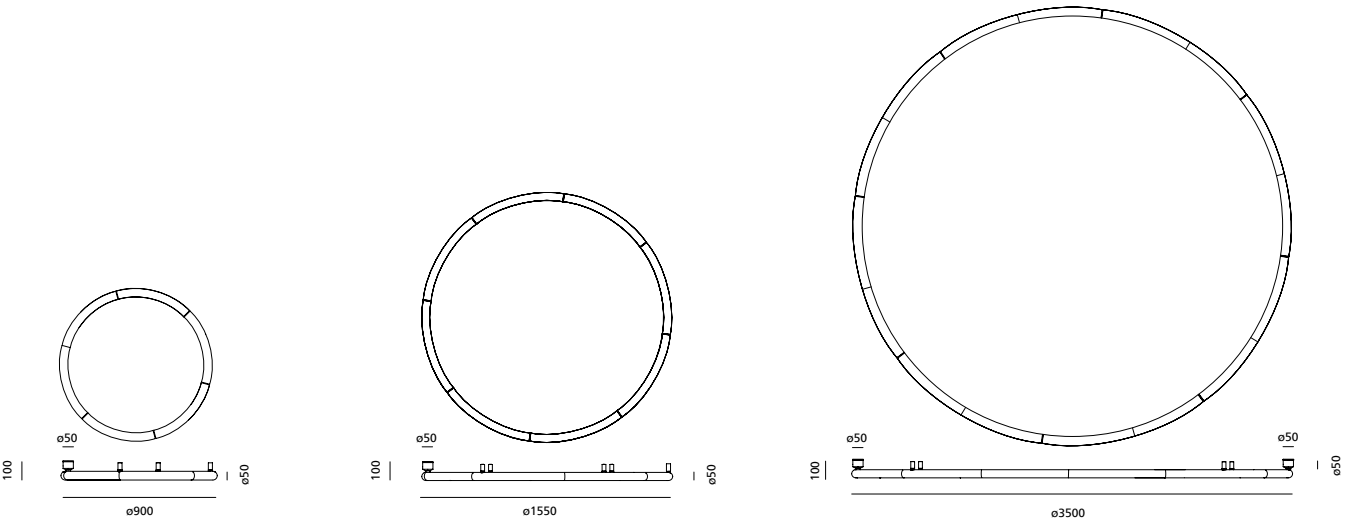

Model	Driver	Vac	Pw	Lmm	Wmm	Hmm		Code
Circular Ø90	CC 1400mA	220-240	55	130	76	30	DALI / 1-10 / PUSH	**DV1034**
Circular Ø90	CC 1400mA	220-240	55	130	76	30	APP / PUSH	**DV1034APP**
Circular Ø155	CC 1200+1200mA	220-240	91	350	80	23	DALI / 1-10 / PUSH	**DV1036**
Circular Ø155	CC 1200+1200mA	220-240	91	350	80	23	APP / PUSH	**DV1036APP**
Circular Ø350	CC 1050+1050mA	220-240	141	350	80	23	DALI / 1-10 / PUSH	**DV1109**
Circular Ø350	CC 1050+1050mA	220-240	141	350	80	23	APP / PUSH	**DV1109APP**

ALPHABET OF LIGHT - CIRCULAR

Opal White

XF

*EPD compliance
EPDITALY0430
12/05/2023
www.epditaly.it


MacAdam 3SDCM
Life L70 (10K) 55000h
CRI =80

IP20

SUSPENSION

	W	Flux	CCT	DALI / PUSH Code	APP / PUSH Code
Circular ø 90	55 W	6040 lm	3000K	**1206000A**	**1206000APP**
Circular ø 155	91 W	10740 lm	3000K	**1207000A***	**1207000APP**
Circular ø 350	180 W	21478 lm	3000K	**1214000A**	**1214000APP**



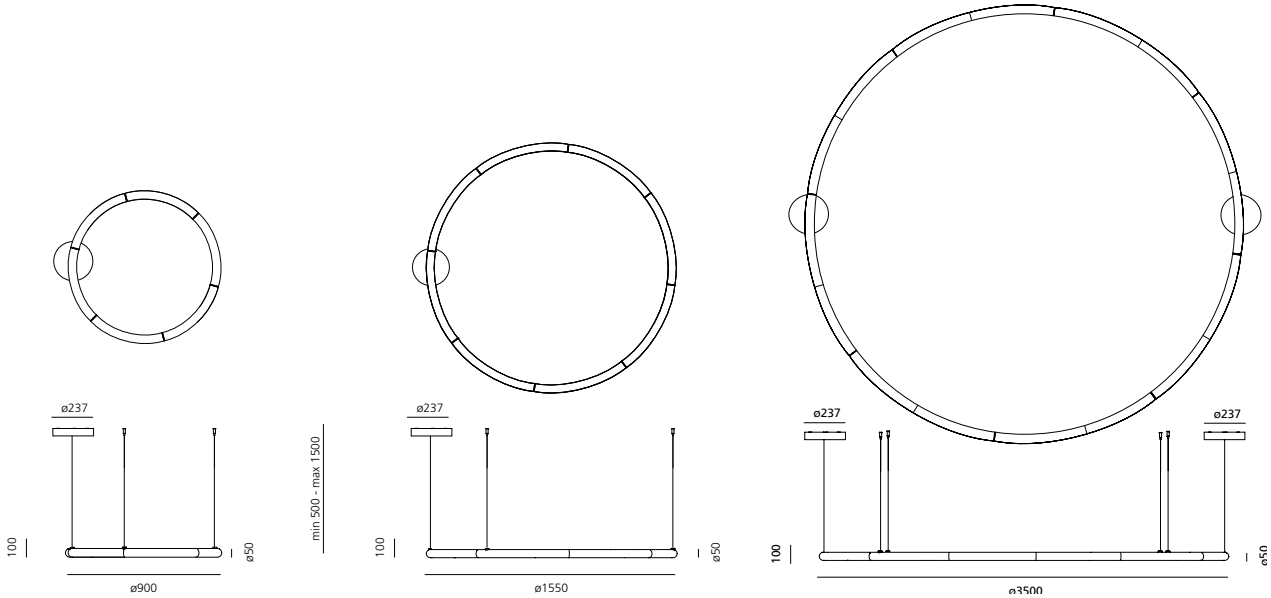

	Code
4 extension feeding cable of 4.5 m + 8 suspension wires L=6m for AoL circular Ø350	**1209200A**
4.5 m extension feeding cable + 4 suspension wires L=6m for AoL circular Ø155	**1209100A**
4.5 m extension feeding cable + 3 suspension wires L=6m for AoL circular Ø90	**1209000A**

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

Code
DV1080APP



Basilica di San Silvestro, Trieste, Italy, Ph. Andrea Dapretto | 2020





Fico Eataly World, Bologna | 2017


Multinational Corporation Offices, Milan | 2017






The Blond Salad Headquarters, Milan | 2017

Alphabet of light Letters & Letters Mini

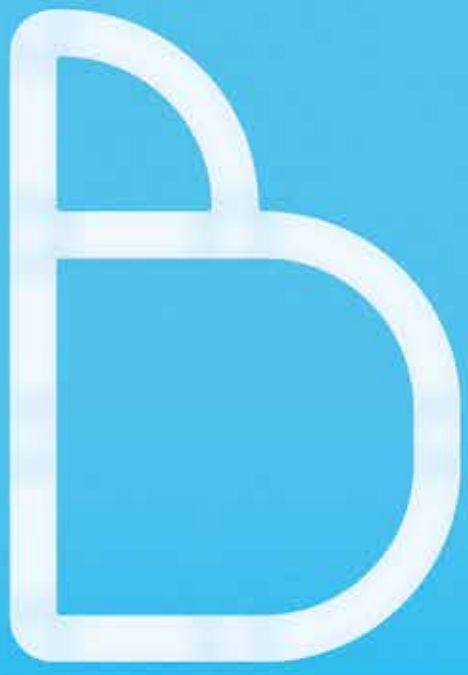

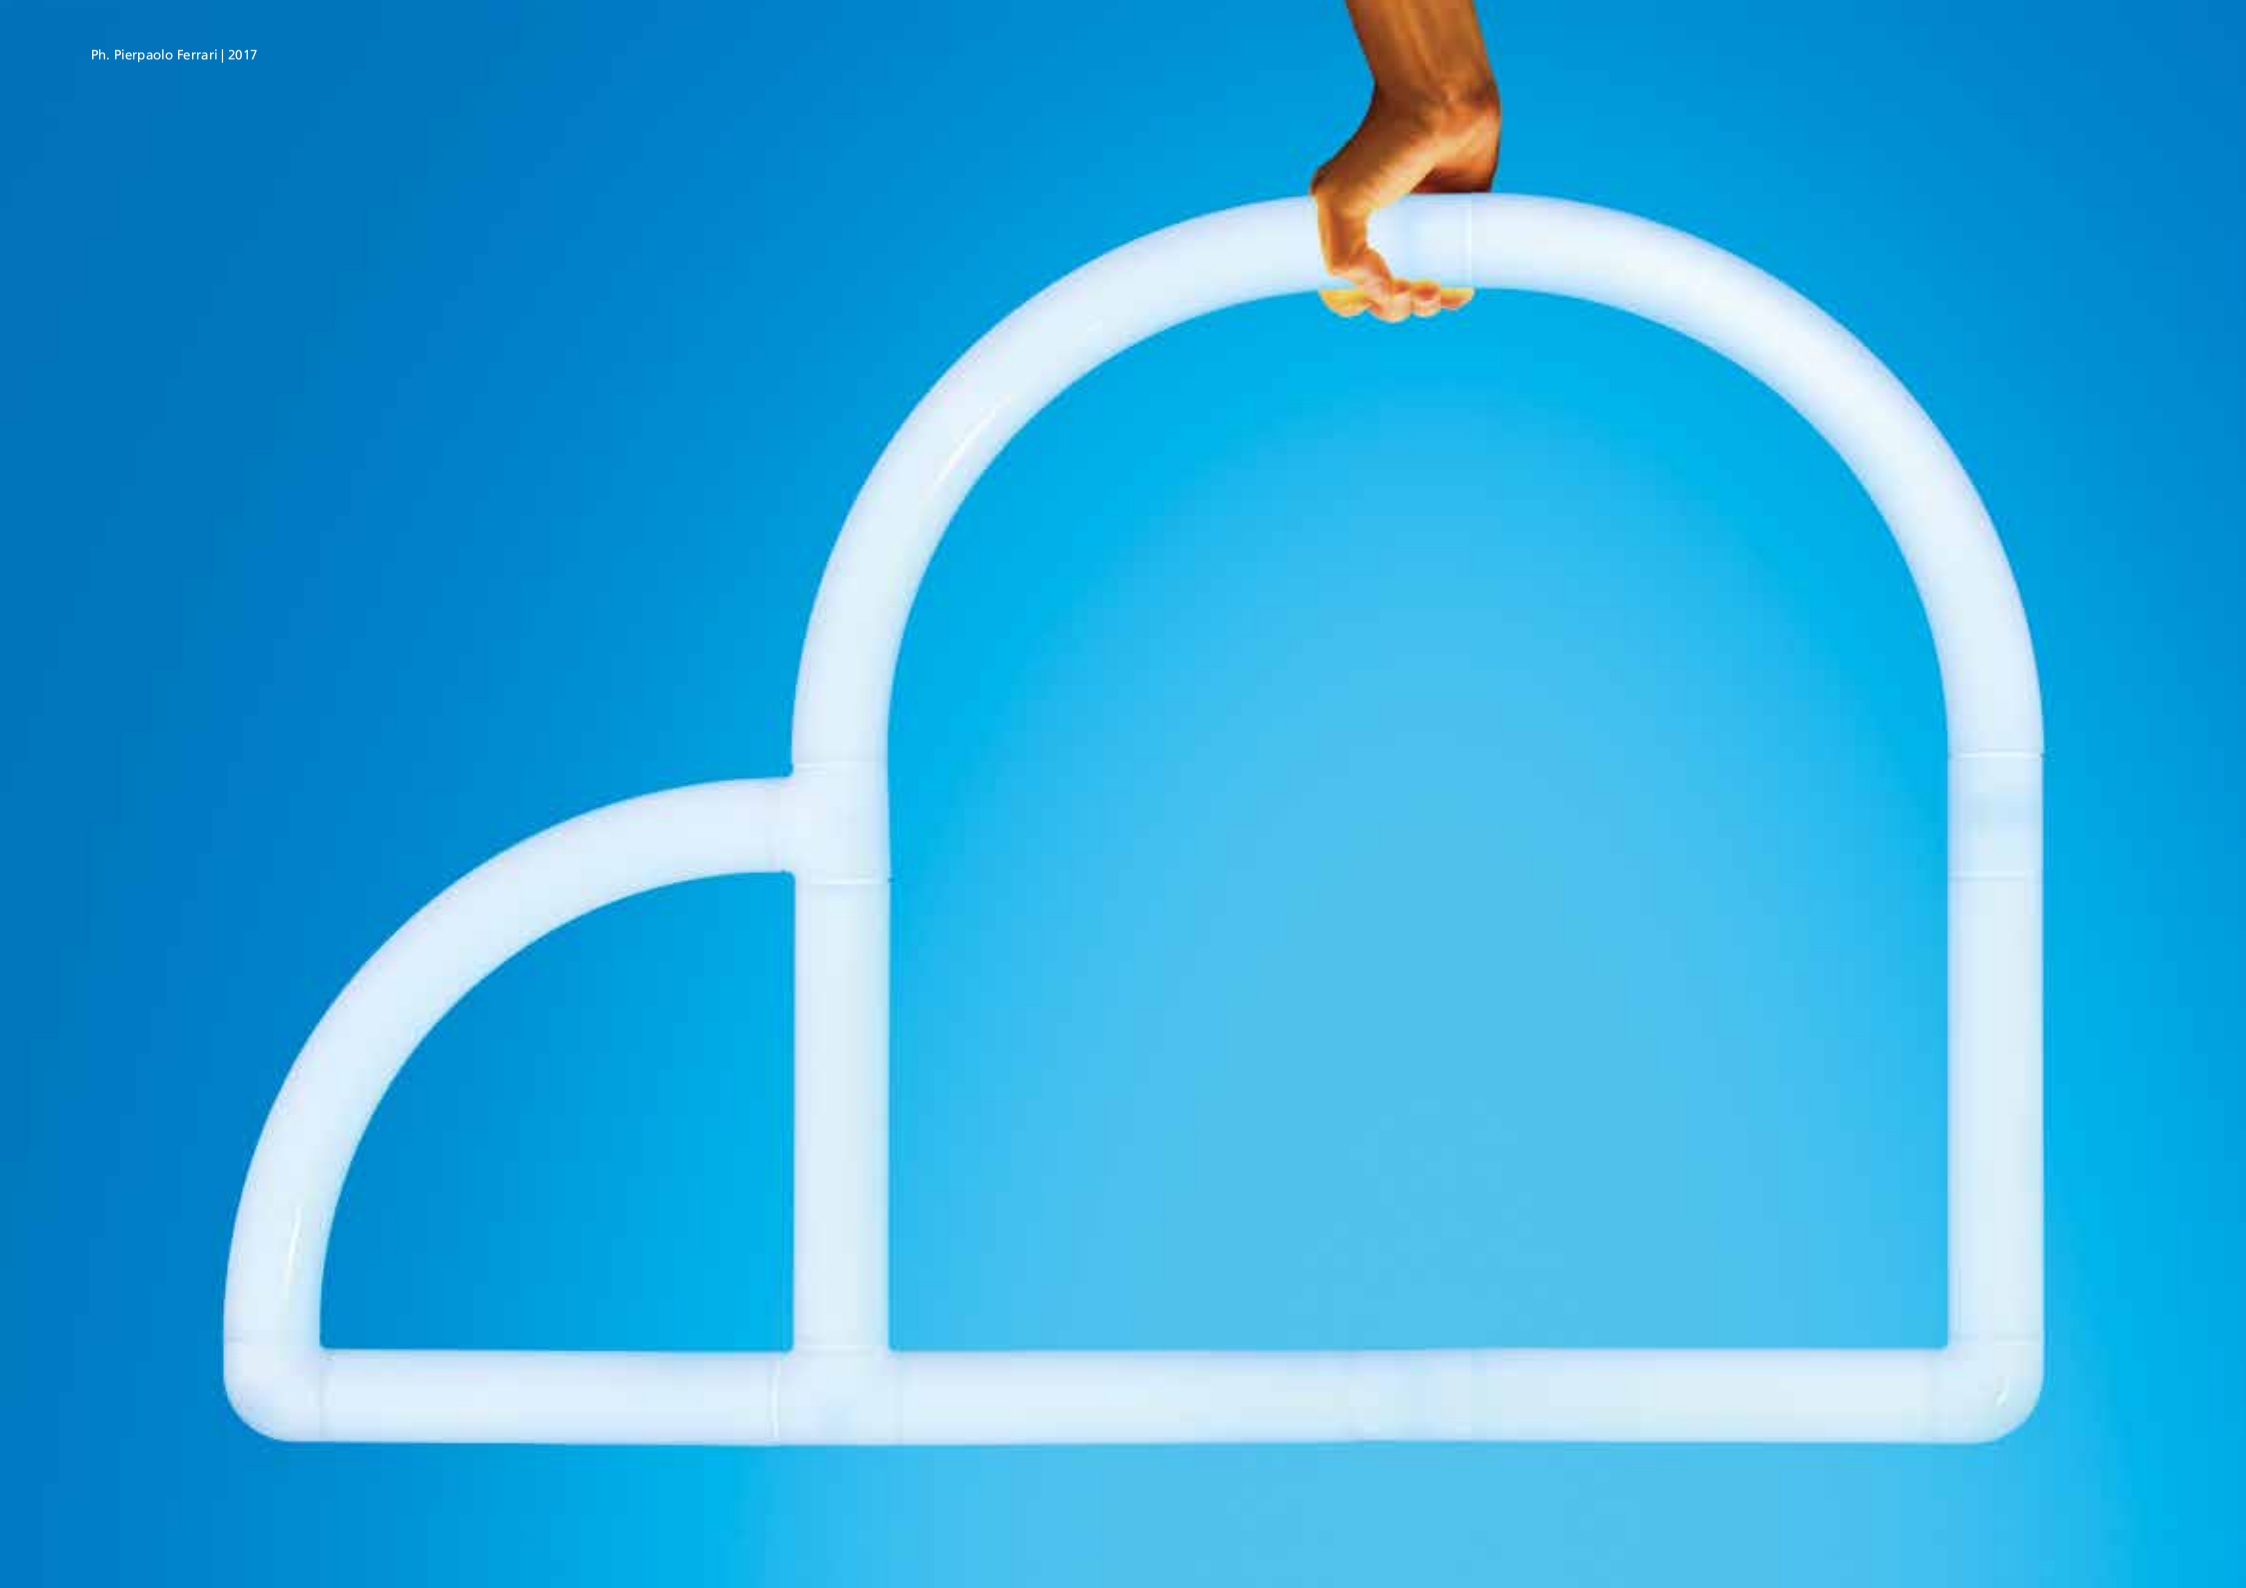

Ph. Pierpaolo Ferrari | 2017



"Quick brown fox jumps over the lazy dog" Installation at Università Statale di Milano
Milano Design Week, Ph. Saverio Lombardi Vallauri | 2017


ps over the lazy dog


Artemide Lighting Consultancy & Training Center, New York | 2017



Wells Fargo Office, New York, USA. Ph. Garrett Rowland | 2019


MDF SUPPORT INSTALLATION

The letters are provided mounted on MDF panels to allow installation on any kind of wall. Installation requires creating a counter-frame to accommodate the drivers, supplied separately, and the power cables.

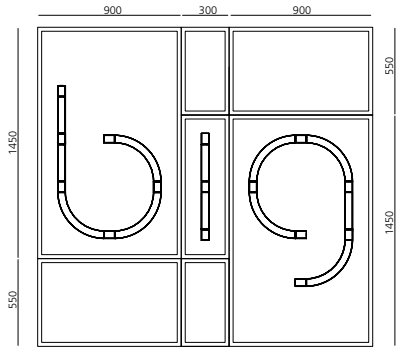



1. Create the supporting frame and provide for power connections for the individual letters.

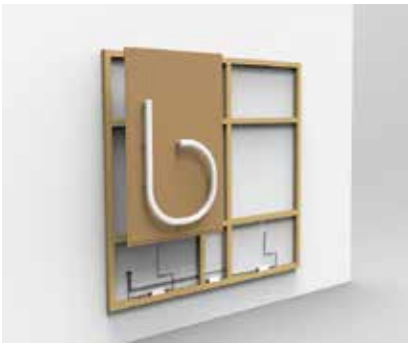

2. Connect panel b to power source.



3. Fix panel b and connect panel i to power source.



4. Fix panel i and connect panel g to power source.



5. Fix panel g and close using the supplied panels.



6. Complete closing using the supplied panels.



7. Frame ready for finishing.




8. Apply the gauze and plaster flush with the gaps between panels.




9. Final painting.


CARDBOARD MOUNTING-SUPPORT INSTALLATION

The letters are provided with a packaging that ensures the right support during the installation process. This type of installation is suitable for existing drywalls that have accessible back space for the housing of drivers (code DV1009) supplied separately and cables (power supply 75 W max - 2 letters or more up to max 85% load).

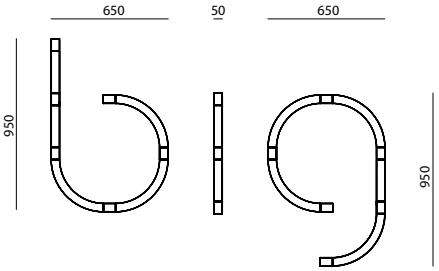


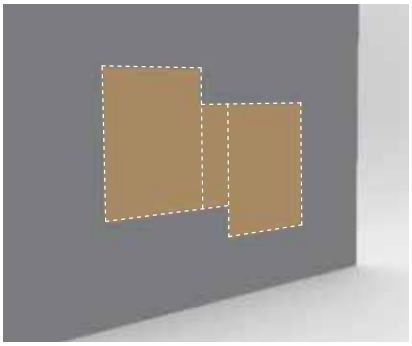


1. Drywall with accessible back space.
Use the provided template to drill the holes and paint the drywall.

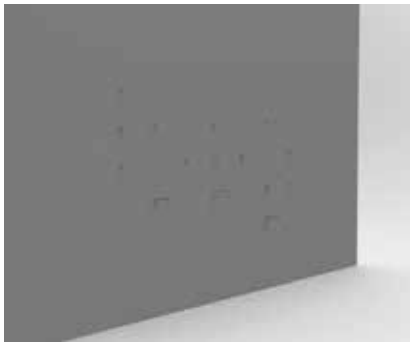

2. Install wall pins, identify output points and prepare wiring connections.

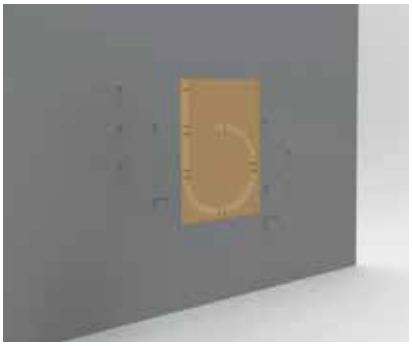

3. Connection of letter b to first wall output.

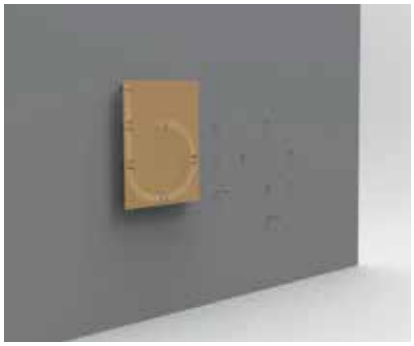

4. Attachment of letter b on wall pins.




5. Detail of the wall pins fixing.



6. Detail of the wall pins fixing.



7. Removal of the nylon wrapper.

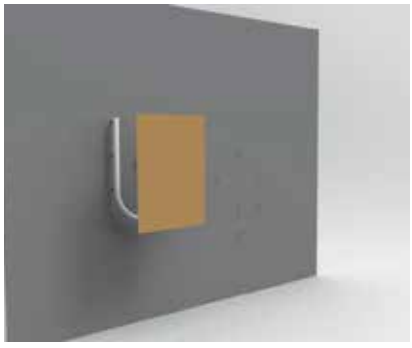

8. Removal of the cardboard support.



9. Repeat the procedure for the other letters.
Finished.

ALPHABET OF LIGHT - LETTERS

Opal White



XF



24VDC Driver supplied separately.

MacAdam 3SDCM
Life L70 (6K) 36000h
CRI =80

IP20

			Size		
Letter	W	Flux	H x L	Letters	+ MDF Support
A	36 W	3060 lm	950 x 650	**1201A00A**	**1211A00A**
B	38 W	3240 lm	950 x 650	**1201B00A**	**1211B00A**
C	22 W	1962 lm	950 x 650	**1201C00A**	**1211C00A**
D	36 W	3024 lm	950 x 650	**1201D00A**	**1211D00A**
E	30 W	2538 lm	950 x 650	**1201E00A**	**1211E00A**
F	22 W	1890 lm	950 x 650	**1201F00A**	**1211F00A**
G	24 W	2079 lm	950 x 650	**1201G00A**	**1211G00A**
H	32 W	2664 lm	950 x 650	**1201H00A**	**1211H00A**
I	12 W	1008 lm	950 x 50	**1201I00A**	**1211I00A**
J	24 W	2079 lm	950 x 650	**1201J00A**	**1211J00A**
K	30 W	2556 lm	950 x 650	**1201K00A**	**1211K00A**
L	20 W	1656 lm	950 x 650	**1201L00A**	**1211L00A**
M	46 W	3834 lm	950 x 950	**1201M00A**	**1211M00A**
N	30 W	2520 lm	950 x 650	**1201N00A**	**1211N00A**
O	32 W	2808 lm	950 x 650	**1201O00A**	**1211O00A**
P	32 W	2718 lm	950 x 650	**1201P00A**	**1211P00A**
Q	36 W	3150 lm	950 x 650	**1201Q00A**	**1211Q00A**
R	36 W	3060 lm	950 x 650	**1201R00A**	**1211R00A**
S	26 W	2295 lm	950 x 650	**1201S00A**	**1211S00A**
T	20 W	1674 lm	950 x 650	**1201T00A**	**1211T00A**
U	28 W	2412 lm	950 x 650	**1201U00A**	**1211U00A**
V	30 W	2520 lm	950 x 650	**1201V00A**	**1211V00A**
W	46 W	3834 lm	950 x 950	**1201W00A**	**1211W00A**
X	32 W	2664 lm	950 x 900	**1201X00A**	**1211X00A**
Y	24 W	2106 lm	950 x 650	**1201Y00A**	**1211Y00A**
Æ	50 W	4176 lm	950 x 950	**1201AE00A**	**1211AE00A**
Ø	44 W	3780 lm	950 x 650	**1201§00A**	**1211§00A**
Å	42 W	3600 lm	950 x 650	**1201£00A**	**1211£00A**
Z	32 W	2736 lm	950 x 650	**1201Z00A**	**1211Z00A**

			Size		
Letter	W	Flux	H x L	Letters	+ MDF Support
0	32 W	2808 lm	950 x 650	**1200000A**	**1210000A**
1	26 W	2205 lm	950 x 650	**1200100A**	**1210100A**
2	32 W	2835 lm	950 x 650	**1200200A**	**1210200A**
3	26 W	2304 lm	950 x 650	**1200300A**	**1210300A**
4	26 W	2214 lm	950 x 650	**1200400A**	**1210400A**
5	34 W	2943 lm	950 x 650	**1200500A**	**1210500A**
6	28 W	2502 lm	950 x 650	**1200600A**	**1210600A**
7	22 W	1872 lm	950 x 650	**1200700A**	**1210700A**
8	40 W	3456 m	950 x 650	**1200800A**	**1210800A**
9	28 W	2502 lm	950 x 650	**1200900A**	**1210900A**

			Size		
Letter	W	Flux	H x L	Letters	+ MDF Support
a	22 W	1971 lm	650 x 650	**1202a00A**	**1212a00A**
b	26 W	2295 lm	950 x 650	**1202b00A**	**1212b00A**
c	18 W	1638 lm	650 x 650	**1202c00A**	**1212c00A**
d	26 W	2295 lm	950 x 650	**1202d00A**	**1212d00A**
e	22 W	1971 lm	650 x 650	**1202e00A**	**1212e00A**
f	18 W	1557 lm	950 x 350	**1202f00A**	**1212f00A**
g	28 W	2502 lm	950 x 650	**1202g00A**	**1212g00A**
h	26 W	2214 lm	950 x 650	**1202h00A**	**1212h00A**
i	8 W	684 lm	650 x 50	**1202i00A**	**1212i00A**
j	14 W	1215 lm	950 x 350	**1202j00A**	**1212j00A**
k	26 W	2223 lm	950 x 650	**1202k00A**	**1212k00A**
l	12 W	1008 lm	950 x 50	**1202l00A**	**1212l00A**
m	34 W	2862 lm	650 x 950	**1202m00A**	**1212m00A**
n	22 W	1872 lm	650 x 650	**1202n00A**	**1212n00A**
o	24 W	2160 lm	650 x 650	**1202o00A**	**1212o00A**
p	26 W	2295 lm	950 x 650	**1202p00A**	**1212p00A**
q	26 W	2295 lm	950 x 650	**1202q00A**	**1212q00A**
r	14 W	1233 lm	650 x 350	**1202r00A**	**1212r00A**
s	24 W	2079 lm	650 x 650	**1202s00A**	**1212s00A**
t	18 W	1557 lm	950 x 350	**1202t00A**	**1212t00A**
u	22 W	1872 lm	650 x 650	**1202u00A**	**1212u00A**
v	20 W	1746 lm	650 x 650	**1202v00A**	**1212v00A**
w	28 W	2394 lm	650 x 950	**1202w00A**	**1212w00A**
x	16 W	1368 lm	650 x 650	**1202x00A**	**1212x00A**
y	28 W	2421 lm	950 x 650	**1202y00A**	**1212y00A**
æ	34 W	3069 lm	650 x 950	**1202ae00A**	**1212ae00A**
ø	32 W	2808 lm	650 x 650	**1202§00A**	**1212§00A**
å	28 W	2511 lm	650 x 650	**1202£00A**	**1212£00A**
z	28 W	2421 lm	650 x 650	**1202z00A**	**1212z00A**

Driver

Driver	Vin (V)	Vout (V)	L_{mm}	W_{mm}	H_{mm}	IP	Code
75 W	220-240Vac	24Vdc	180	52	30	20 Undimmable	DV1009



Broken Nature “La Nazione delle Piante”, XXII International Exhibition, Triennale di Milano, Ph. Federico Villa | 2017




245 355 A
245 355 B
245 355 C
245 355 D
245 355 E
245 355 F
245 355 G
245 355 H
25 355 I
245 355 J
245 355 K
245 355 L
355 355 M
245 355 N
245 355 O
245 355 P
245 355 Q
245 355 R
245 355 S
245 355 T
245 355 U
245 355 V
355 355 W
343 355 X
245 355 Y
355 355 Æ
245 355 Ø
245 433 Å
245 355 Z

ALPHABET OF LIGHT - LETTERS MINI

Opal White



XF



24VDC Driver supplied separately.


MacAdam 3SDCM
Life L70 (10K) 102000h
CRI =90

IP20

	Size			
Letter	W	Flux	H x L	Letters
A	11 W	1151 lm	355 x 245	**1215A00A**
B	12 W	1233 lm	355 x 245	**1215B00A**
C	7 W	740 lm	355 x 245	**1215C00A**
D	11 W	1151 lm	355 x 245	**1215D00A**
E	9 W	946 lm	355 x 245	**1215E00A**
F	7 W	699 lm	355 x 245	**1215F00A**
G	8 W	781 lm	355 x 245	**1215G00A**
H	10 W	986 lm	355 x 245	**1215H00A**
I	4 W	370 lm	355 x 25	**1215I00A**
J	8 W	781 lm	355 x 245	**1215J00A**
K	9 W	946 lm	355 x 245	**1215K00A**
L	6 W	616 lm	355 x 245	**1215L00A**
M	14 W	1439 lm	355 x 355	**1215M00A**
N	9 W	946 lm	355 x 245	**1215N00A**
O	11 W	1069 lm	355 x 245	**1215O00A**
P	10 W	1027 lm	355 x 245	**1215P00A**
Q	12 W	1192 lm	355 x 245	**1215Q00A**
R	11 W	1151 lm	355 x 245	**1215R00A**
S	9 W	863 lm	355 x 245	**1215S00A**
T	6 W	616 lm	355 x 245	**1215T00A**
U	9 W	905 lm	355 x 245	**1215U00A**
V	9 W	946 lm	355 x 245	**1215V00A**
W	14 W	1439 lm	355 x 355	**1215W00A**
X	10 W	986 lm	343 x 343	**1215X00A**
Y	8 W	781 lm	355 x 245	**1215Y00A**
Æ	15 W	1562 lm	355 x 355	**1215AE00A**
Ø	14 W	1439 lm	355 x 245	**1215§00A**
Å	13 W	1357 lm	433 x 245	**1215£00A**
Z	10 W	1027 lm	355 x 245	**1215Z00A**

Driver

Driver	Vin (V)	Vout (V)	L_{mm}	W_{mm}	H_{mm}	IP		Code
75 W	220-240Vac	24Vdc	180	52	30	20	Undimmable	DV1009
30 W	220-240Vac	24Vdc	153	41	32	20	Undimmable	DV1032
Dimmer	24Vdc	24Vdc PWM	80	54	24	20	Dimmable Dali/0-10V/Push	DV1048

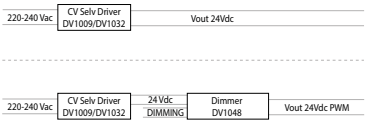




BIC



Vancouver House, Vancouver, Canada, Ph. Mac's II Agencies | 2020

Alphabet of light and Gople system are compatible with Artemide App

Artemide App is a user-friendly and intuitive interface used to control individual products, groups of appliances and lighting scenarios. It is a tool that can be associated with several products from both the Design and the Architectural Catalogues.

Download Artemide App
and find more information on
artemide.com

Artemide®

Headquarters

Artemide S.p.A.
Via Bergamo, 18
20006 Pregnana Milanese (MI), Italy
Tel. +39 02 93518.1
Tel. +39 02 93526.1
Numero verde 800 834 093
(from Italy only)
info@artemide.com
artemide.com

Artemide S.p.A.
si riserva la facoltà di modificare, in qualunque momento e senza preavviso, le caratteristiche tecniche degli elementi illustrati nel presente catalogo.

Artemide S.p.A.
reserves the right to change, at any time and without prior warning, the technical specifications of any product illustrated in this catalogue.

Artemide S.p.A.
se réserve le droit de modifier, à n'importe quel moment et sans préavis, les caractéristiques techniques des éléments illustrés dans ce catalogue.

Artemide S.p.A.
behält sich das Recht vor jederzeit und ohne Ankündigung die technischen Daten der im Katalog abgebildetem Produkte zu ändern.

Artemide S.p.A.
se reserva la facultad de modificar, en cualquier y sin aviso previo, las características técnicas de los elementos ilustrados en el presente catálgo.

2024

For information regarding distributors and points of sale, please visit our website artemide.com or email: info@artemide.com