

Luminaire


Code T417700W00
Name FACI 24 VETRO INCASSO PARETE LED 3000K

Measurem.

Code FTS0000781
Name FACI 24 VETRO INCASSO PARETE LED 3000K

Luminaire Flux	189 lm	Luminaire Power	7.0 W	Efficacy	26.996 lm/W	Efficiency	100.00%
Source Flux	189 lm	Maximum value	970.98 cd/klm	Position	C=355.00 G=57.00	CG Asymmetrical	
Rectangular Luminaire		Length	230 mm	Width	110 mm	Height	100 mm
Rectangular Luminous Area		Length	190 mm	Width	75 mm	Height	0 mm
Horizontal Luminous Area		0.014250 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003447 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		05-10-2012		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		189 lm	
Led Faci 3000K							
C.I.E.	28 67 94 97 100			D DIN 5040		A11	
F UTE	0.97 I + 0.03 T			B NBN		BZ 7 / 1 / BZ 6 / 4 / BZ 5	

230mm x 110mm




Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 2.52 %

DLOR 97.48 %

RN 2.52 %

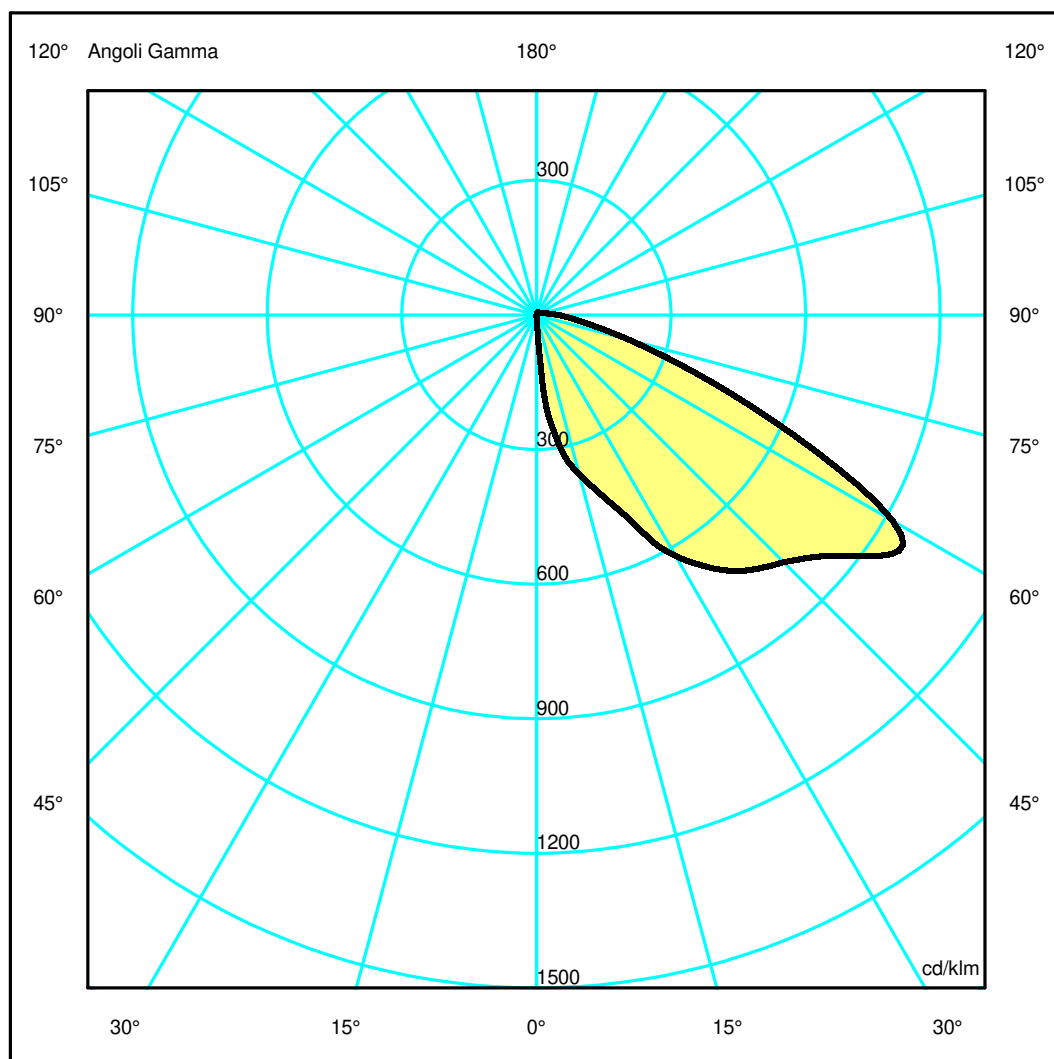

Luminaire

Code T417700W00
Name FACI 24 VETRO INCASSO PARETE LED 3000K

Measurem.


Code FTS0000781
Name FACI 24 VETRO INCASSO PARETE LED 3000K

Luminaire Flux	189 lm	Luminaire Power	7.0 W	Efficacy	26.996 lm/W	Efficiency	100.00%
Source Flux	189 lm	Maximum value	970.98 cd/klm	Position	C=355.00 G=57.00	CG Asymmetrical	
Rectangular Luminaire		Length	230 mm	Width	110 mm	Height	100 mm
Rectangular Luminous Area		Length	190 mm	Width	75 mm	Height	0 mm
Horizontal Luminous Area		0.014250 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003447 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		05-10-2012		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		189 lm	
Led Faci 3000K							
C.I.E.	28 67 94 97 100			D DIN 5040	A11		
F UTE	0.97 I + 0.03 T			B NBN	BZ 7 / 1 / BZ 6 / 4 / BZ 5		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.90	1.79	2.69	3.59	4.48	OC	1.62	3.25	4.87	6.49	8.11
OB	1.11	2.21	3.32	4.42	5.53	OD	1.88	3.75	5.63	7.50	9.38

	0	5	15	25	35	45	55	65	75	85	
OA	0.39	30.81	69.67	96.76	130.32	147.20	176.64	119.33	40.63	14.33	
OB	0.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
OC	0.39	0.39	0.20	0.20	0.08	0.06	0.04	0.02	0.02	0.02	
OD	0.39	0.39	0.39	0.39	0.00	0.00	0.00	0.00	0.00	0.00	

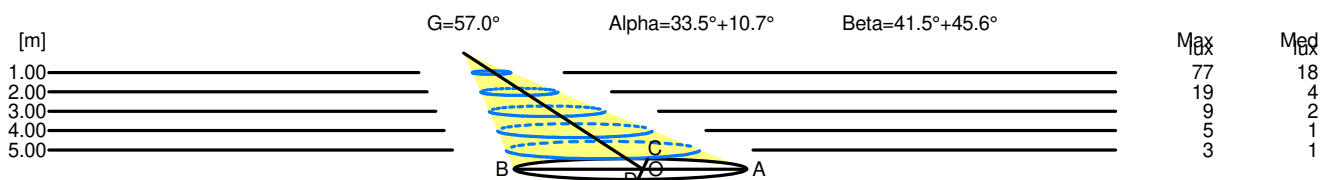

H[m]	D[m]	Max lux	Med lux	Alpha=33.5°+10.7°	G=57.0
1.00	2.00	77	18		
2.00	4.00	19	4		
3.00	6.01	9	2		
4.00	8.01	5	1		
5.00	10.01	3	1		

H[m]	D[m]	Max lux	Med lux	Beta=45.6°+41.5°	G=0.0
1.00	3.50	77	18		
2.00	7.00	19	4		
3.00	10.49	9	2		
4.00	13.99	5	1		
5.00	17.49	3	1		