

Luminaire


Code T417700W00
Name FACI VETRO 24 14 LED 5W 3000K

Measurem.

Code FTS0000782
Name FACI VETRO 24 14 LED 5W 3000K

Efficiency	100.00%	Coordinate system	CG	Total Flux	188.97 lm	
Maximum value	970.98 cd/klm	Position	C=355.00 G=57.00	Asymmetrical		
Rectangular Luminaire	Length	230 mm	Width	110 mm	Height	100 mm
Rectangular Luminous Area	Length	190 mm	Width	75 mm	Height	0 mm
Horizontal Luminous Area	0.014250 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.003447 m2		
Date	05-10-2012		Maximum Gamma Angle	180		
Measurement Distance	0.00		Measurement Flux	188.97 lm		
Led Faci 3000K						
C.I.E.	28 67 94 97 100		D DIN 5040	A11		
F UTE	0.97 I + 0.03 T		B NBN	BZ 7 / 1 / BZ 6 / 4 / BZ 5		


230mm x 110mm



Semipiani C

180.0 ——— 0.0
270.0 ■■■■ 90.0

ULOR 2.52 %
DLOR 97.48 %
RN 2.52 %

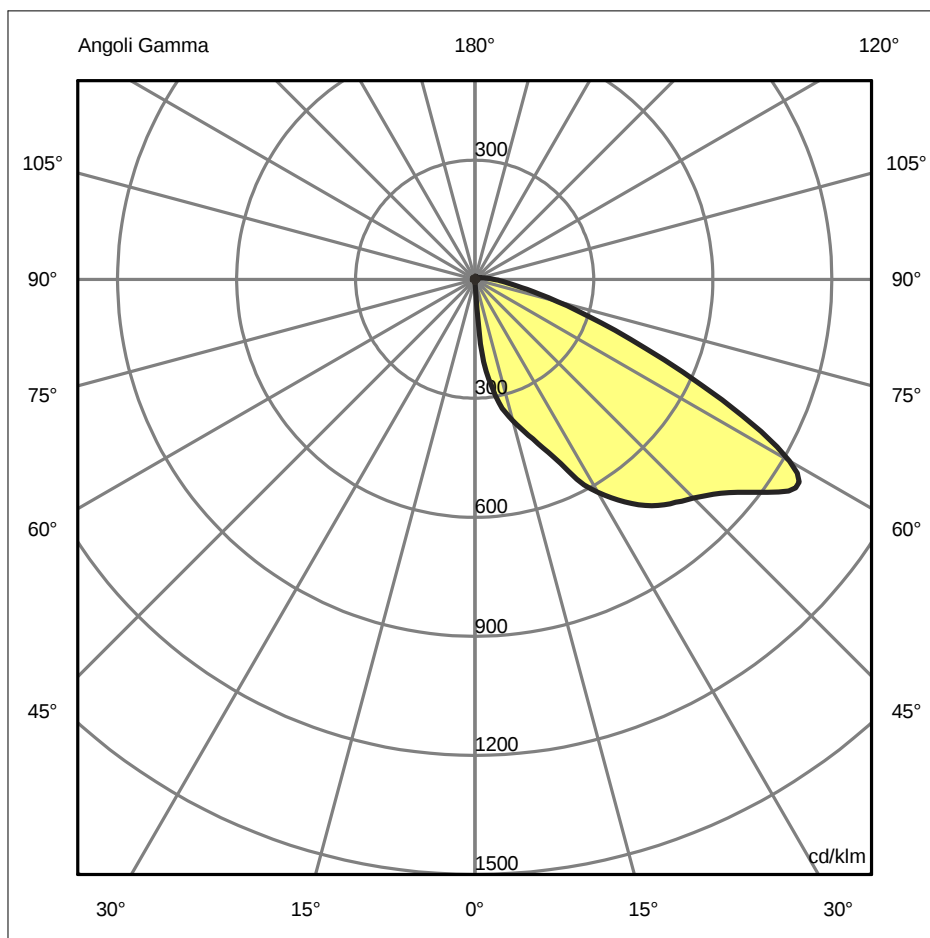

Luminaire

Code T417700W00
Name FACI VETRO 24 14 LED 5W 3000K
Measurem.
Code FTS0000782
Name FACI VETRO 24 14 LED 5W 3000K


Efficiency	100.00%	Coordinate system	CG	Total Flux	188.97 lm	
Maximum value	970.98 cd/klm	Position	C=355.00 G=57.00	Asymmetrical		
Rectangular Luminaire	Length	230 mm	Width	110 mm	Height	100 mm
Rectangular Luminous Area	Length	190 mm	Width	75 mm	Height	0 mm
Horizontal Luminous Area	0.014250 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.003447 m2		
Date	05-10-2012		Maximum Gamma Angle	180		
Measurement Distance	0.00		Measurement Flux	188.97 lm		
Led Faci 3000K						
C.I.E.	28 67 94 97 100		D DIN 5040	A11		
F UTE	0.97 I + 0.03 T		B NBN	BZ 7 / 1 / BZ 6 / 4 / BZ 5		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.90	1.79	2.69	3.59	4.48	OC	1.62	3.25	4.87	6.49	8.11
OB	1.11	2.21	3.32	4.42	5.53	OD	1.88	3.75	5.63	7.50	9.38

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	0.39	30.81	69.67	96.76	130.32	147.20	176.64	119.33	40.63	14.33
OB	0.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
OC	0.39	0.39	0.20	0.20	0.08	0.06	0.04	0.02	0.02	0.02
OD	0.39	0.39	0.39	0.39	0.00	0.00	0.00	0.00	0.00	0.00

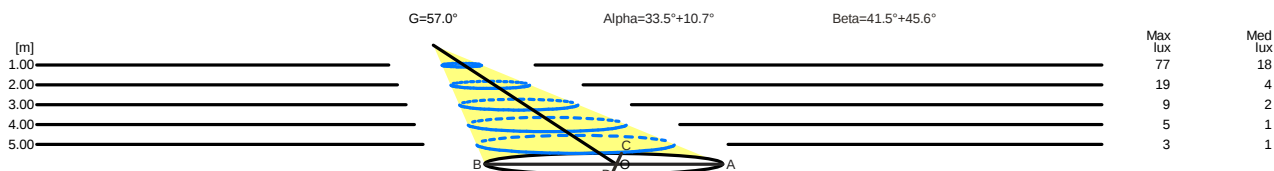

H[m]	D[m]	Max lux	Med lux	Alpha=33.5°+10.7°	G=57.0
1.00	2.00	77	18		
2.00	4.00	19	4		
3.00	6.01	9	2		
4.00	8.01	5	1		
5.00	10.01	3	1		

H[m]	D[m]	Max lux	Med lux	Beta=45.6°+41.5°	G=0.0
1.00	3.50	77	18		
2.00	7.00	19	4		
3.00	10.49	9	2		
4.00	13.99	5	1		
5.00	17.49	3	1		