

Luminaire


Code M060120
Name Surf parete LED - 3000K bianco - non dimmerabile

Measur.

Code FTS1400149
Name Surf parete LED - 3000K bianco - non dimmerabile

Luminaire Flux	2930.84 lm	Luminaire Power	35.00 W	Efficacy	83.74 lm/W	Efficiency	100.00%
Lamps Flux	2930.84 lm	Maximum value	466.41 cd/klm	Position	C=0.00 G=159.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	300 mm	Width	175 mm	Height	40 mm
Rectangular Luminous Area		Length	70 mm	Width	70 mm	Height	0 mm
Horizontal Luminous Area		0.004900 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001185 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		10-02-2014		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2930.84 lm	
3000K - Imax=466 cd/Klm - LED Flux=3433 lm - LED Power=31 W - Eff=85 % - EfcLED=110 lm/W - EfcLum=80 lm/W Ra=80 min - SDCM=3 - Life=L70(6K)>50.000 ore							
C.I.E.	0 0 0 0 100			D DIN 5040	--		
F UTE	1.00 T			B NBN	BZ 10		

300mm x 175mm




Semipiani C

180.0 ——— 0.0
270.0 90.0

ULOR100.00 %

DLOR 0.00 %

RN100.00 %

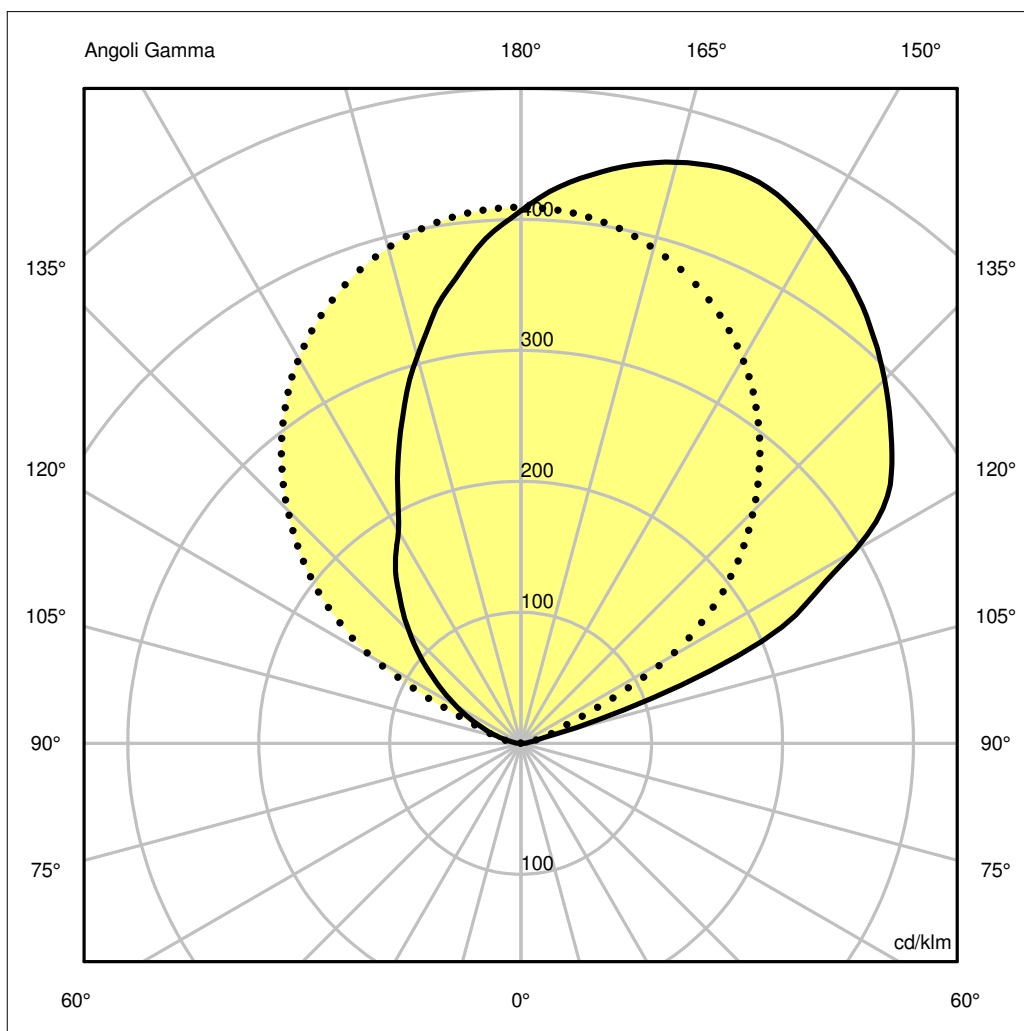

Luminaire


Code M060120
Name Surf parete LED - 3000K bianco - non dimmerabile
Measurem.
Code FTS1400149
Name Surf parete LED - 3000K bianco - non dimmerabile

Luminaire Flux	2930.84 lm	Luminaire Power	35.00 W	Efficacy	83.74 lm/W	Efficiency	100.00%
Lamps Flux	2930.84 lm	Maximum value	466.41 cd/klm	Position	C=0.00 G=159.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	300 mm	Width	175 mm	Height	40 mm
Rectangular Luminous Area		Length	70 mm	Width	70 mm	Height	0 mm
Horizontal Luminous Area		0.004900 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001185 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		10-02-2014		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2930.84 lm	
3000K - I _{max} =466 cd/Klm - LED Flux=3433 lm - LED Power=31 W - Eff=85 % - EfcLED=110 lm/W - EfcLum=80 lm/W Ra=80 min - SDCM=3 - Life=L70(6K)>50.000 ore							
C.I.E.	0 0 0 0 100			D DIN 5040	--		
F UTE	1.00 T			B NBN	BZ 10		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.74	3.49	5.23	6.98	8.72	OC	1.40	2.79	4.19	5.59	6.98
OB	0.82	1.65	2.47	3.29	4.12	OD	1.40	2.79	4.19	5.59	6.98

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1192.18	1260.67	1346.60	1356.01	1274.09	1151.68	1009.12	678.12	85.72	12.98
OB	1192.18	1113.20	896.32	652.83	489.67	353.60	223.35	117.27	44.54	12.31
OC	1199.36	1193.88	1147.76	1056.35	918.81	737.65	520.90	189.67	53.94	12.42
OD	1199.36	1193.88	1147.76	1056.35	918.81	737.65	520.90	189.67	53.94	12.42

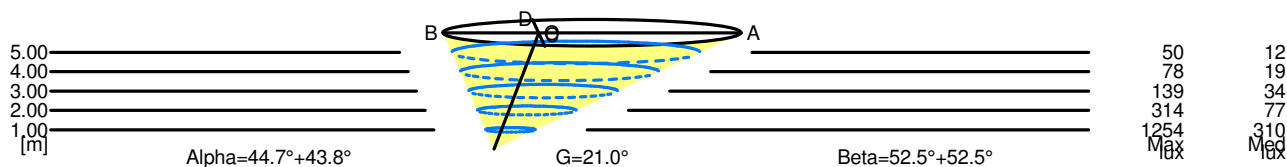

5.00	12.84	50	12		
4.00	10.27	78	19		
3.00	7.70	139	34		
2.00	5.13	314	77		
1.00	2.57	1254	310		
H[m]	D[m]	Max lux	Med lux	$\alpha = 44.7^\circ + 43.8^\circ$	$G = 21.0$

5.00	13.97	50	12		
4.00	11.18	78	19		
3.00	8.38	139	34		
2.00	5.59	314	77		
1.00	2.79	1254	310		
H[m]	D[m]	Max lux	Med lux	$\beta = 52.5^\circ + 52.5^\circ$	$G = 0.0$