

Luminaire


Code T418620W00
Name Cariddi 30 narrow 3000K

Measurem.

Code FTS1400231
Name Cariddi 30 narrow 3000K

Efficiency	100.00%	Coordinate system	CG	Total Flux	1638.01 lm
Maximum value	8182.91 cd/klm	Position	C=0.00 G=0.00	Rotosymmetrical	
Round Luminaire		Diam.	137 mm	Height	365 mm
Round Luminous Area		Diam.	110 mm	Height	0 mm
Horizontal Luminous Area	0.009503 m2			Emitting area on Plane 180°	0.000000 m2
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.002299 m2
Date	01-04-2014			Maximum Gamma Angle	90
Measurement Distance	0.00			Measurement Flux	1638.01 lm
3000K - I _{max} =8183 cd/Klm - LED Flux=2561 lm - LED Power=24 W - Eff=64 % - EfcLED=107 lm/W - EfcLum=59 lm/W Ra=80 min - SDCM=2 - Life=L70(6K)>36.300 ore					
C.I.E.	93 100 100 100 100		D DIN 5040	A60	
F UTE	1.00 A		B NBN	BZ 1	


Diam=137mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

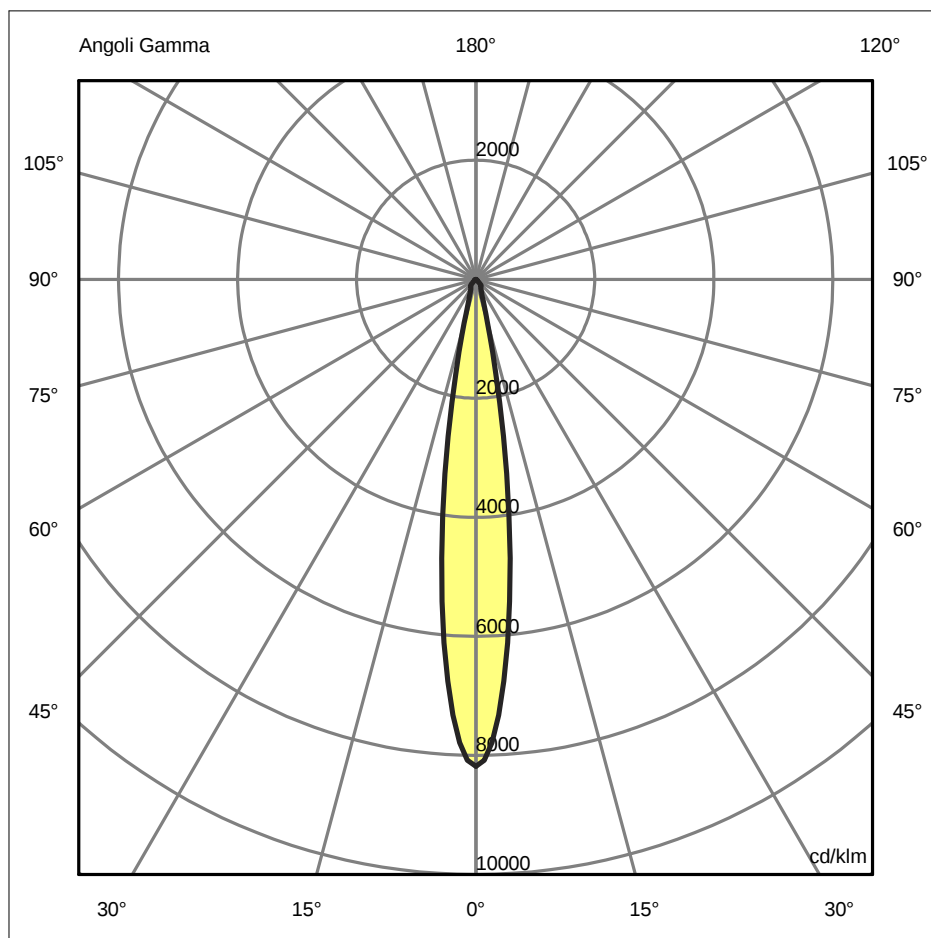

Luminaire

Code T418620W00
Name Cariddi 30 narrow 3000K

Measurem.

Code FTS1400231
Name Cariddi 30 narrow 3000K


Efficiency	100.00%	Coordinate system	CG	Total Flux	1638.01 lm
Maximum value	8182.91 cd/klm	Position	C=0.00 G=0.00	Rotosymmetrical	
Round Luminaire	Diam.	137 mm	Height	365 mm	
Round Luminous Area	Diam.	110 mm	Height	0 mm	
Horizontal Luminous Area	0.009503 m2		Emitting area on Plane 180°	0.000000 m2	
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2	
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.002299 m2	
Date	01-04-2014	Maximum Gamma Angle	90		
Measurement Distance	0.00	Measurement Flux	1638.01 lm		
3000K - Imax=8183 cd/Klm - LED Flux=2561 lm - LED Power=24 W - Eff=64 % - EfcLED=107 lm/W - EfcLum=59 lm/W Ra=80 min - SDCM=2 - Life=L70(6K)>36.300 ore					
C.I.E.	93 100 100 100 100	D DIN 5040	A60		
F UTE	1.00 A	B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.14	0.28	0.42	0.55	0.69	OC	0.14	0.28	0.42	0.55	0.69
OB	0.14	0.28	0.42	0.55	0.69	OD	0.14	0.28	0.42	0.55	0.69

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	13403.68	10041.65	1238.40	347.49	239.80	125.39	32.07	7.87	0.00	0.00
OB	13403.68	10041.65	1238.40	347.49	239.80	125.39	32.07	7.87	0.00	0.00
OC	13403.68	10041.65	1238.40	347.49	239.80	125.39	32.07	7.87	0.00	0.00
OD	13403.68	10041.65	1238.40	347.49	239.80	125.39	32.07	7.87	0.00	0.00

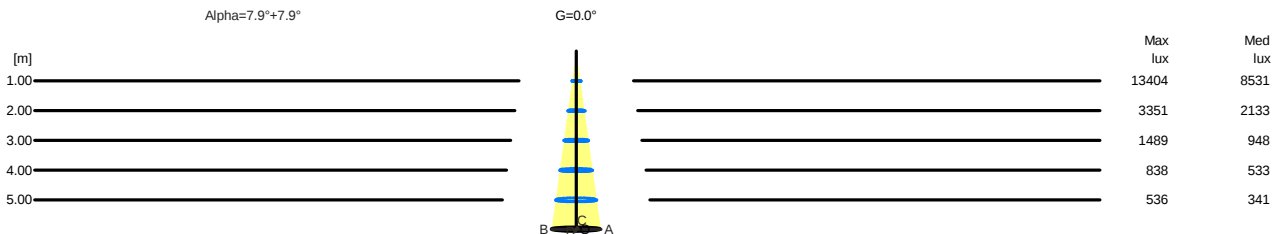

H[m]	D[m]	Max lux	Med lux	Alpha=7.9°+7.9°	G=0.0
1.00	0.28	13404	8531		
2.00	0.55	3351	2133		
3.00	0.83	1489	948		
4.00	1.11	838	533		
5.00	1.38	536	341		