

Luminaire


Code M251025
Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. BIANCO

Measurem.

Code FTS1602096
Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	1038.33 lm	Luminaire Power	13.00 W	Efficacy	79.87 lm/W	Efficiency	100.00%
Sources Flux	1038.33 lm	Maximum value	3667.96 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1038.33 lm	
LED Flux=1390lm LED Power=13W Eff=74,7% EfcLed=107lm/W EfcLum=80lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	93 98 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

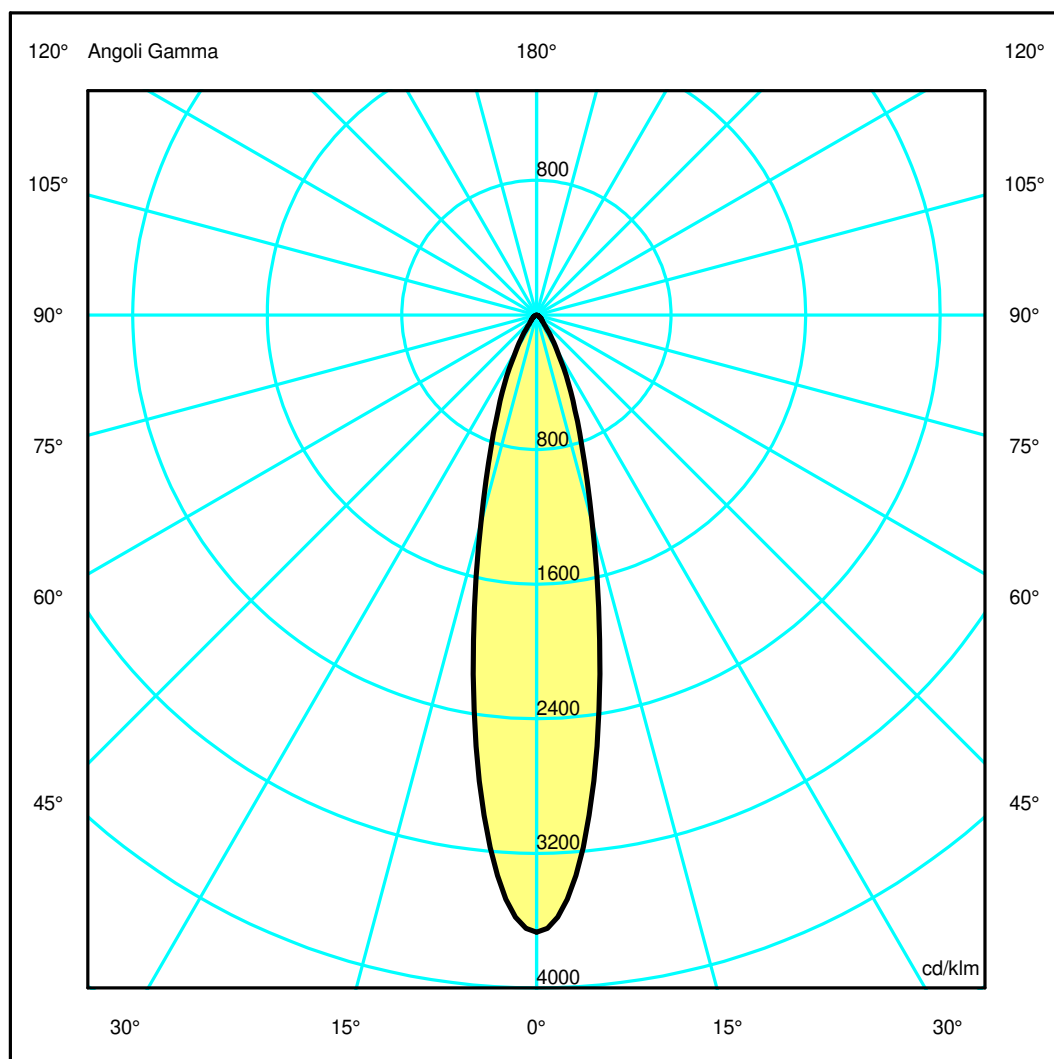

Luminaire

Code M251025

Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. BIANCO

Measurem.

Code FTS1602096


Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	1038.33 lm	Luminaire Power	13.00 W	Efficacy	79.87 lm/W	Efficiency	100.00%
Sources Flux	1038.33 lm	Maximum value	3667.96 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1038.33 lm	
LED Flux=1390lm LED Power=13W Eff=74,7% EfcLed=107lm/W EfcLum=80lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	93 98 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.41	0.62	0.83	1.04	OC	0.21	0.41	0.62	0.83	1.04
OB	0.21	0.41	0.62	0.83	1.04	OD	0.21	0.41	0.62	0.83	1.04

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3808.55	3297.04	1330.97	467.38	133.52	49.40	29.76	13.46	2.23	0.00
OB	3808.55	3297.04	1330.97	467.38	133.52	49.40	29.76	13.46	2.23	0.00
OC	3808.55	3297.04	1330.97	467.38	133.52	49.40	29.76	13.46	2.23	0.00
OD	3808.55	3297.04	1330.97	467.38	133.52	49.40	29.76	13.46	2.23	0.00

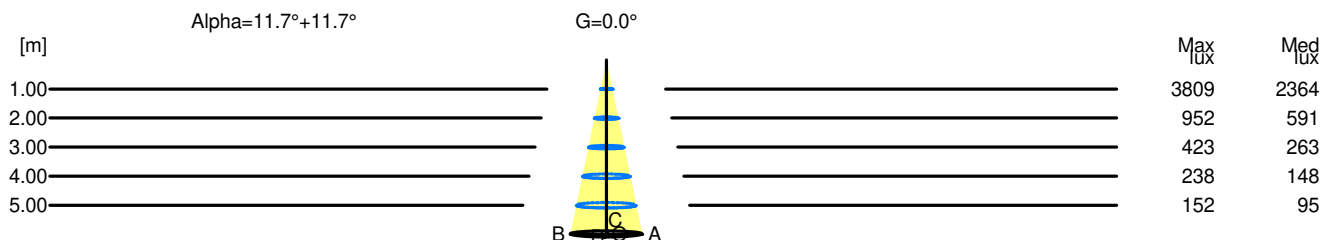

H[m]	D[m]	Max lux	Med lux	Alpha=11.7°+11.7°	G=0.0
1.00	0.41	3809	2364		
2.00	0.83	952	591		
3.00	1.24	423	263		
4.00	1.66	238	148		
5.00	2.07	152	95		