

Luminaire

Code M251425

Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 3000K WIDE FLOOD CORNICE BIANCO / DEFL. BIANCO


Measurement

Code FTS1602168

Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 3000K WIDE FLOOD CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	1029.99 lm	Luminaire Power	13.00 W	Efficacy	79.23 lm/W	Efficiency	100.00%
Sources Flux	1029.99 lm	Maximum value	1242.38 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-04-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1029.99 lm	
LED Flux=1390lm LED Power=13W Eff=74,1% EfcLed=107lm/W EfcLum=79lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	82 94 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

Diam=80mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

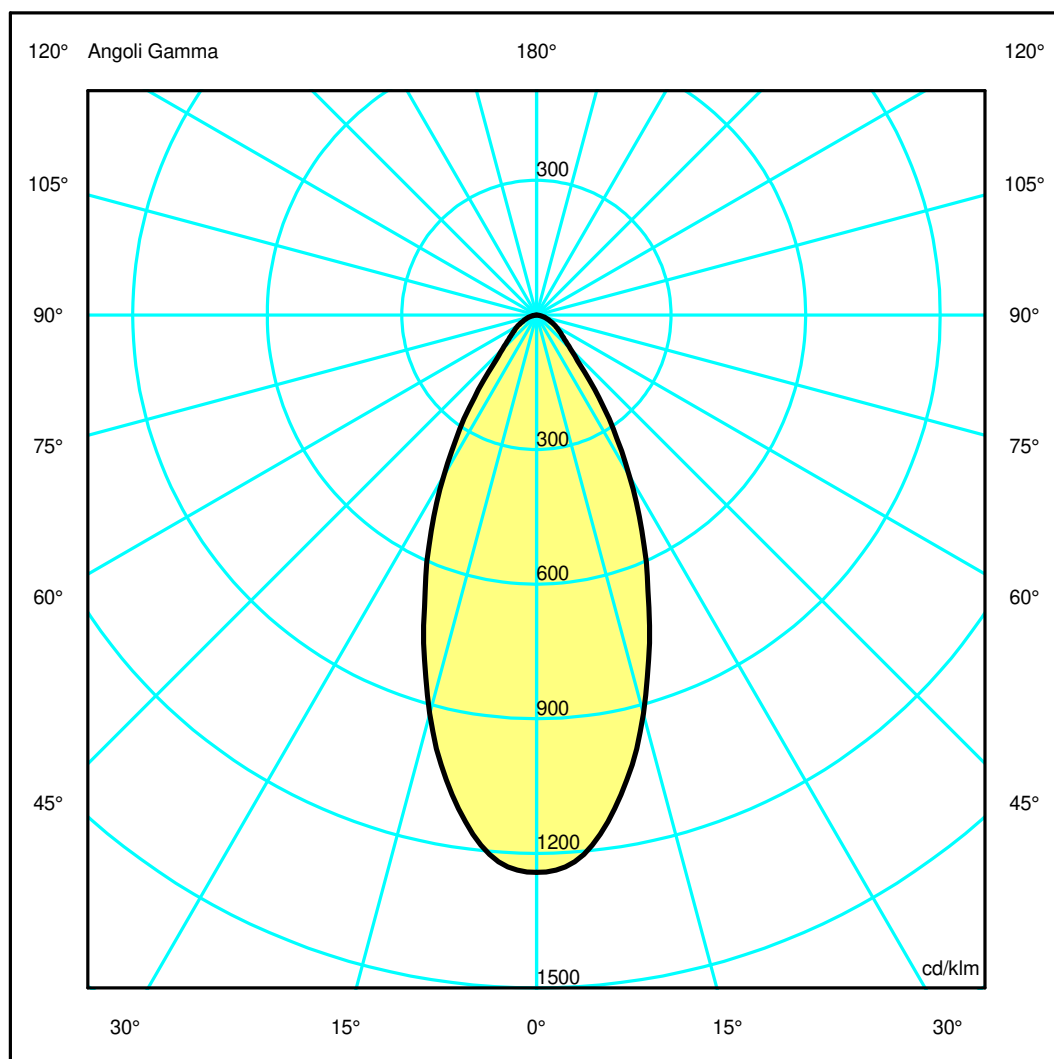

Luminaire

Code M251425

Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 3000K WIDE FLOOD CORNICE BIANCO / DEFL. BIANCO

Measurement

Code FTS1602168


Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 3000K WIDE FLOOD CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	1029.99 lm	Luminaire Power	13.00 W	Efficacy	79.23 lm/W	Efficiency	100.00%
Sources Flux	1029.99 lm	Maximum value	1242.38 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-04-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1029.99 lm	
LED Flux=1390lm LED Power=13W Eff=74,1% EfcLed=107lm/W EfcLum=79lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	82 94 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.43	0.86	1.30	1.73	2.16	OC	0.43	0.86	1.30	1.73	2.16
OB	0.43	0.86	1.30	1.73	2.16	OD	0.43	0.86	1.30	1.73	2.16

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1279.64	1243.06	947.41	584.69	290.46	110.42	63.29	37.32	17.92	4.12
OB	1279.64	1243.06	947.41	584.69	290.46	110.42	63.29	37.32	17.92	4.12
OC	1279.64	1243.06	947.41	584.69	290.46	110.42	63.29	37.32	17.92	4.12
OD	1279.64	1243.06	947.41	584.69	290.46	110.42	63.29	37.32	17.92	4.12

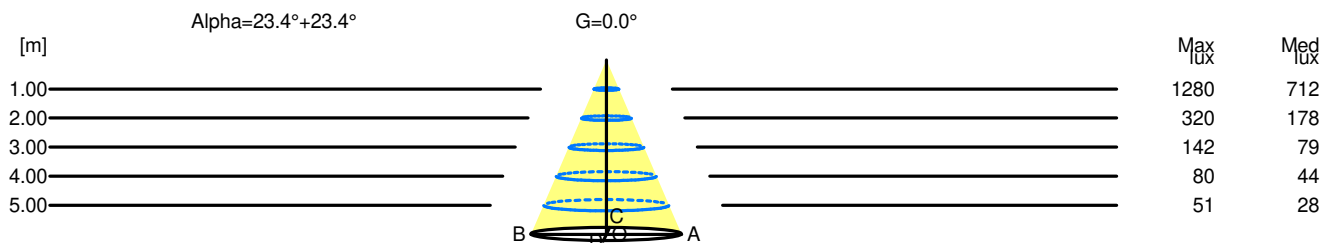

H[m]	D[m]	Max lux	Med lux	Alpha=23.4°+23.4°	G=0.0
1.00	0.86	1280	712		
2.00	1.73	320	178		
3.00	2.59	142	79		
4.00	3.46	80	44		
5.00	4.32	51	28		