

Luminaire


Code M279400
Name EVERYTHING 80 TONDO TRIMLESS FISSO LED 3000K FLOOD DEFL. METALLIZZATO

Measurem.

Code FTS1602121
Name EVERYTHING 80 TONDO TRIMLESS FISSO LED 3000K FLOOD DEFL. METALLIZZATO

Luminaire Flux	982.73 lm	Luminaire Power	13.00 W	Efficacy	75.59 lm/W	Efficiency	100.00%
Sources Flux	982.73 lm	Maximum value	3539.08 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		26-06-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		982.73 lm	
LED Flux=1390lm LED Power=13W Eff=70,7% EfcLed=107lm/W EfcLum=76lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	96 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

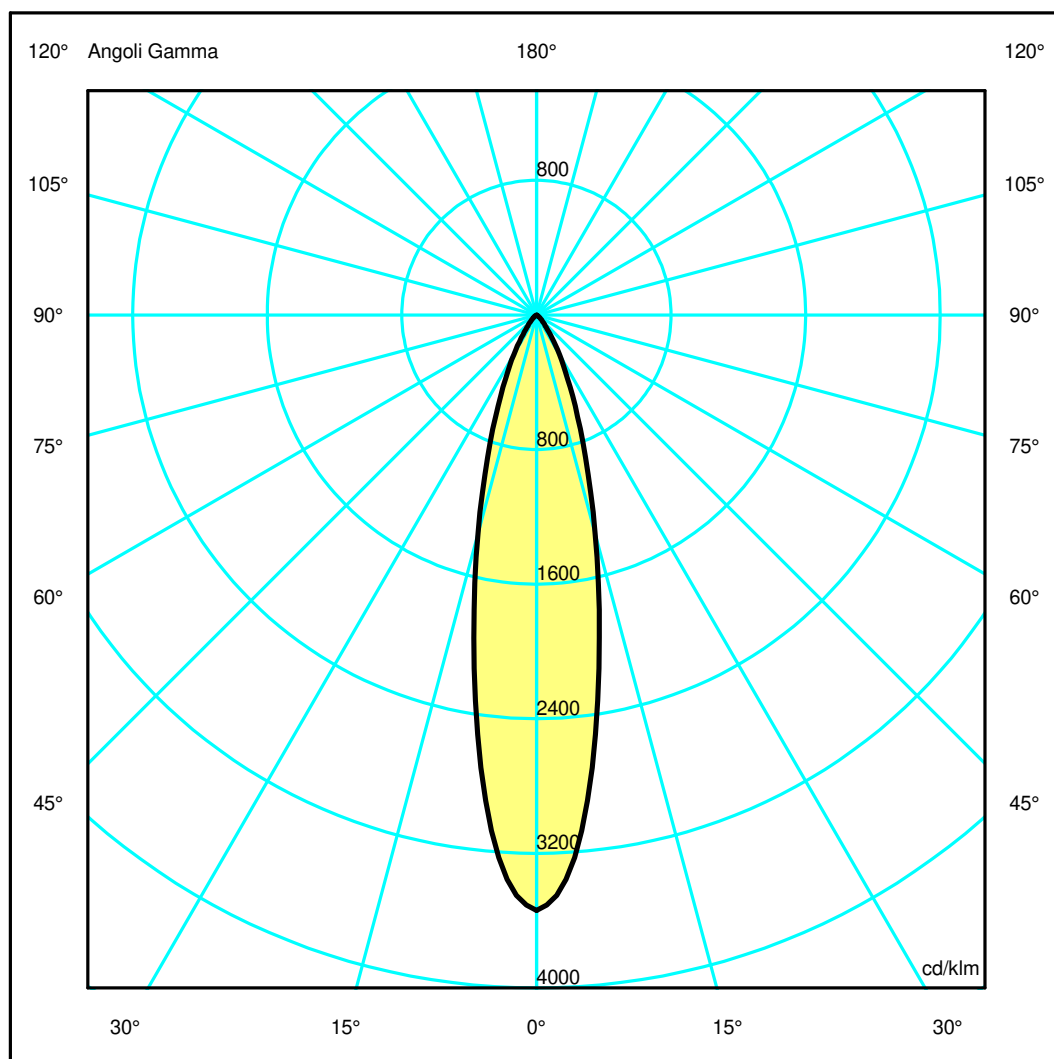

Luminaire

Code M279400
Name EVERYTHING 80 TONDO TRIMLESS FISSO LED 3000K FLOOD DEFL. METALLIZZATO

Measurem.


Code FTS1602121
Name EVERYTHING 80 TONDO TRIMLESS FISSO LED 3000K FLOOD DEFL. METALLIZZATO

Luminaire Flux	982.73 lm	Luminaire Power	13.00 W	Efficacy	75.59 lm/W	Efficiency	100.00%
Sources Flux	982.73 lm	Maximum value	3539.08 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		26-06-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		982.73 lm	
LED Flux=1390lm LED Power=13W Eff=70,7% EfcLed=107lm/W EfcLum=76lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	96 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.43	0.64	0.86	1.07	OC	0.21	0.43	0.64	0.86	1.07
OB	0.21	0.43	0.64	0.86	1.07	OD	0.21	0.43	0.64	0.86	1.07

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3477.96	3023.54	1323.08	463.53	138.38	44.06	15.03	0.49	0.32	0.28
OB	3477.96	3023.54	1323.08	463.53	138.38	44.06	15.03	0.49	0.32	0.28
OC	3477.96	3023.54	1323.08	463.53	138.38	44.06	15.03	0.49	0.32	0.28
OD	3477.96	3023.54	1323.08	463.53	138.38	44.06	15.03	0.49	0.32	0.28

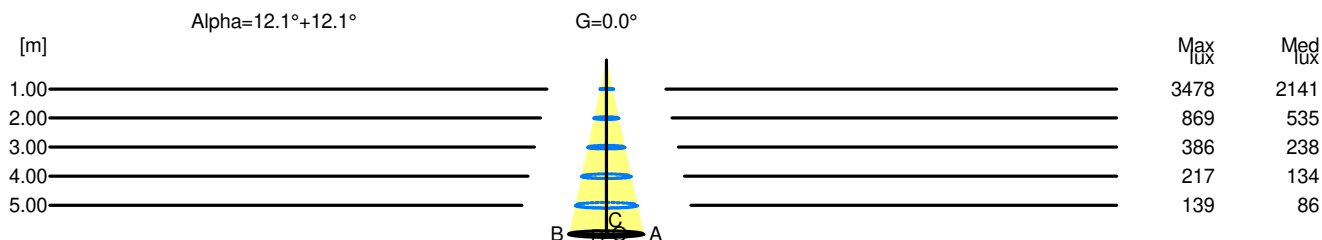

H[m]	D[m]	Max lux	Med lux	Alpha=12.1°+12.1°	G=0.0
1.00	0.43	3478	2141		
2.00	0.86	869	535		
3.00	1.29	386	238		
4.00	1.72	217	134		
5.00	2.15	139	86		