

Luminaire


Code M254805
Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 3000K FLOOD DEFL. BIANCO

Measurem.

Code FTS1602242
Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 3000K FLOOD DEFL. BIANCO

Luminaire Flux	1048.06 lm	Luminaire Power	13.00 W	Efficacy	80.62 lm/W	Efficiency	100.00%
Sources Flux	1048.06 lm	Maximum value	2966.80 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1048.06 lm	
LED Flux=1390lm LED Power=13W Eff=75,4% EfcLed=107lm/W EfcLum=81lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	94 99 100 100 100			D DIN 5040		A60	
F UTE	1.00 A			B NBN		BZ 1	


80mm x 80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

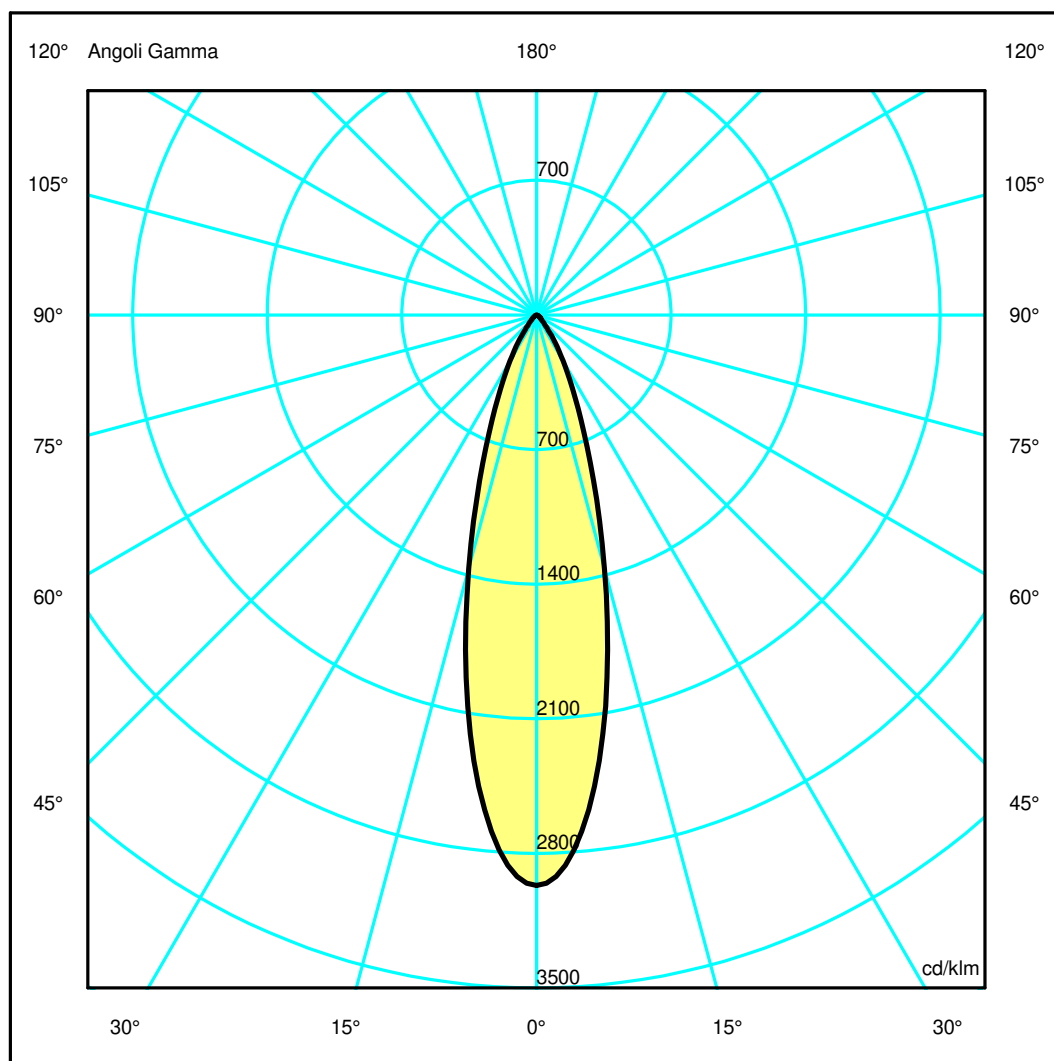

Luminaire

Code M254805
Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 3000K FLOOD DEFL. BIANCO

Measurem.


Code FTS1602242
Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 3000K FLOOD DEFL. BIANCO

Luminaire Flux	1048.06 lm	Luminaire Power	13.00 W	Efficacy	80.62 lm/W	Efficiency	100.00%
Sources Flux	1048.06 lm	Maximum value	2966.80 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1048.06 lm	
LED Flux=1390lm LED Power=13W Eff=75,4% EfcLed=107lm/W EfcLum=81lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	94 99 100 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.50	0.75	1.00	1.26	OC	0.25	0.50	0.75	1.00	1.26
OB	0.25	0.50	0.75	1.00	1.26	OD	0.25	0.50	0.75	1.00	1.26

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3109.38	2824.93	1429.64	500.09	158.41	43.43	22.37	11.59	3.05	0.00
OB	3109.38	2824.93	1429.64	500.09	158.41	43.43	22.37	11.59	3.05	0.00
OC	3109.38	2824.93	1429.64	500.09	158.41	43.43	22.37	11.59	3.05	0.00
OD	3109.38	2824.93	1429.64	500.09	158.41	43.43	22.37	11.59	3.05	0.00

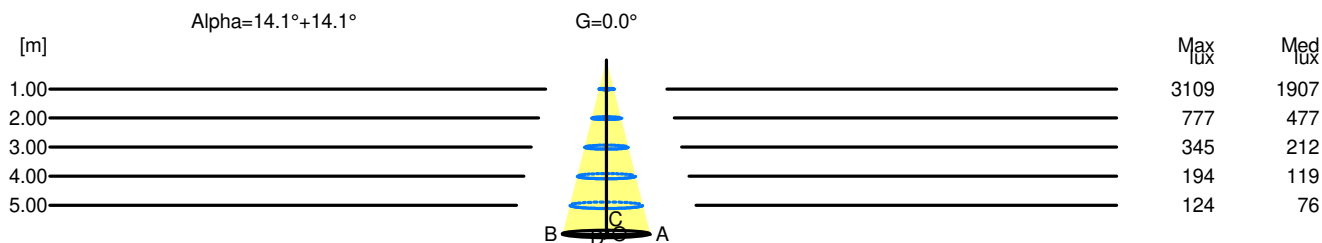

H[m]	D[m]	Max lux	Med lux	Alpha=14.1°+14.1°	G=0.0
1.00	0.50	3109	1907		
2.00	1.00	777	477		
3.00	1.51	345	212		
4.00	2.01	194	119		
5.00	2.51	124	76		