

Luminaire

Code M253425

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. BIANCO


Measurem.

Code FTS1602204

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	1036.96 lm	Luminaire Power	13.00 W	Efficacy	79.77 lm/W	Efficiency	100.00%
Sources Flux	1036.96 lm	Maximum value	3592.99 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1036.96 lm	
LED Flux=1390lm LED Power=13W Eff=74,6% EfcLed=107lm/W EfcLum=80lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	94 99 100 100 100			D DIN 5040		A60	
F UTE	1.00 A			B NBN		BZ 1	

80mm x 80mm




Semipiani C

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

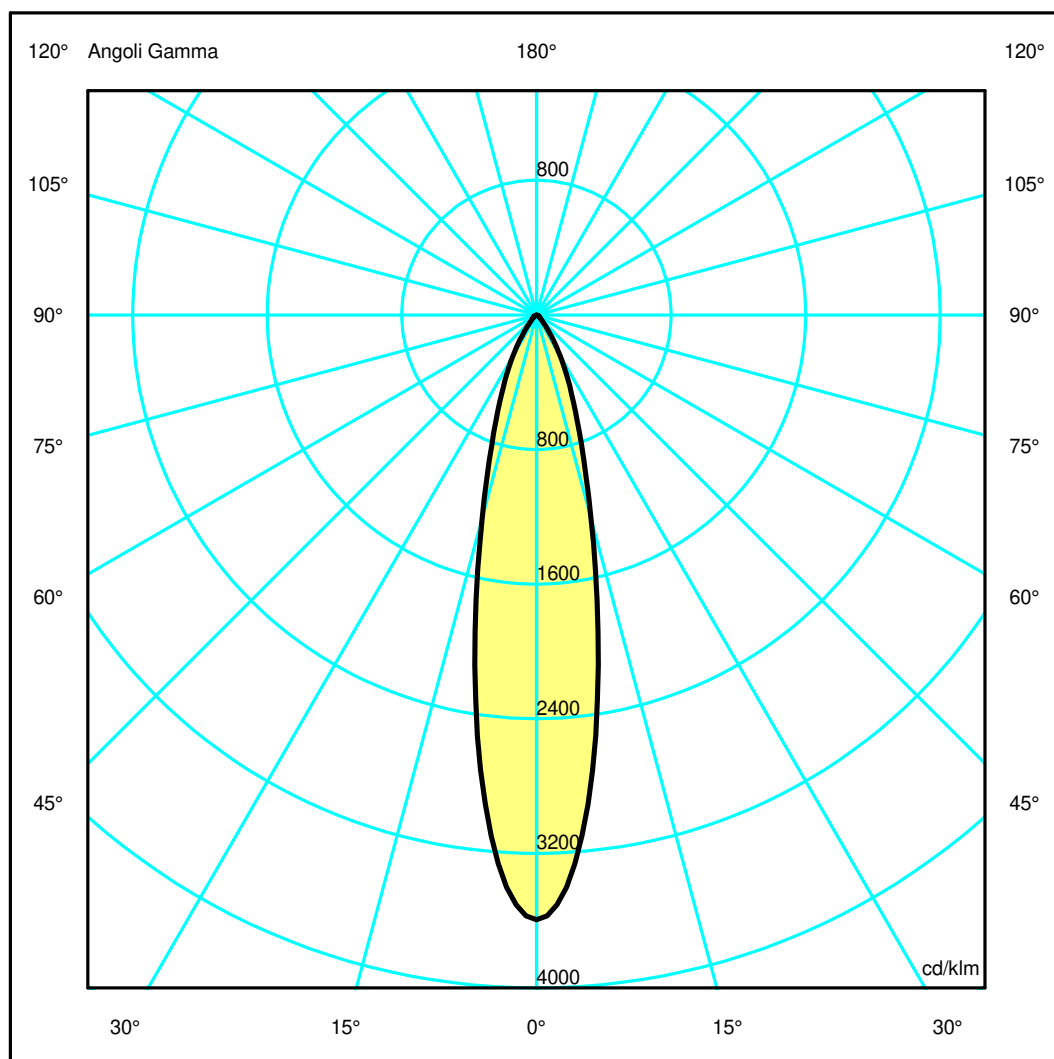

Luminaire


Code M253425
 Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. BIANCO
Measurem.
 Code FTS1602204
 Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	1036.96 lm	Luminaire Power	13.00 W	Efficacy	79.77 lm/W	Efficiency	100.00%
Sources Flux	1036.96 lm	Maximum value	3592.99 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1036.96 lm	
LED Flux=1390lm LED Power=13W Eff=74,6% EfcLed=107lm/W EfcLum=80lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	94 99 100 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.41	0.62	0.82	1.03	OC	0.21	0.41	0.62	0.82	1.03
OB	0.21	0.41	0.62	0.82	1.03	OD	0.21	0.41	0.62	0.82	1.03

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3725.79	3219.80	1298.70	483.49	160.07	45.11	22.54	11.34	3.09	0.00
OB	3725.79	3219.80	1298.70	483.49	160.07	45.11	22.54	11.34	3.09	0.00
OC	3725.79	3219.80	1298.70	483.49	160.07	45.11	22.54	11.34	3.09	0.00
OD	3725.79	3219.80	1298.70	483.49	160.07	45.11	22.54	11.34	3.09	0.00

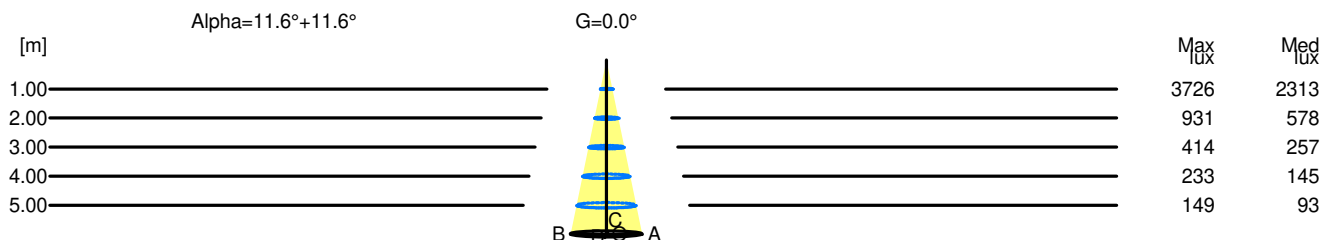

H[m]	D[m]	Max lux	Med lux	Alpha=11.6°+11.6°	G=0.0
1.00	0.41	3726	2313		
2.00	0.82	931	578		
3.00	1.24	414	257		
4.00	1.65	233	145		
5.00	2.06	149	93		