

Luminaire


Code M273625
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. METALLIZZATO

Measurem.

Code FTS1602192
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. METALLIZZATO

Luminaire Flux	1084.20 lm	Luminaire Power	13.00 W	Efficacy	83.40 lm/W	Efficiency	100.00%
Sources Flux	1084.20 lm	Maximum value	3651.00 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1084.20 lm	
LED Flux=1390lm LED Power=13W Eff=78% EfcLed=107lm/W EfcLum=83lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1


80mm x 80mm



Semipiani C

180.0 — 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

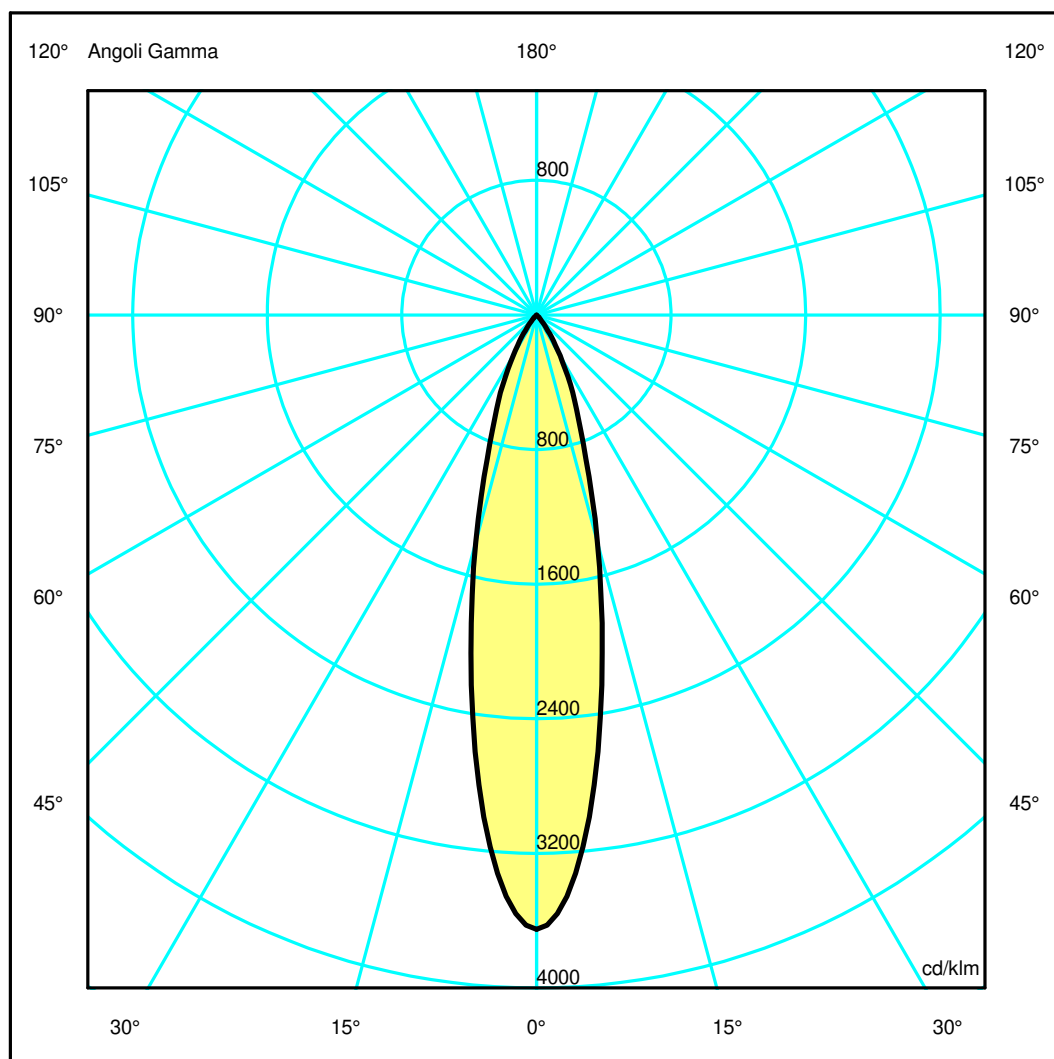

Luminaire


Code M273625
 Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. METALLIZZATO
Measurem.
 Code FTS1602192
 Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K SPOT CORNICE BIANCO / DEFL. METALLIZZATO

Luminaire Flux	1084.20 lm	Luminaire Power	13.00 W	Efficacy	83.40 lm/W	Efficiency	100.00%
Sources Flux	1084.20 lm	Maximum value	3651.00 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1084.20 lm	
LED Flux=1390lm LED Power=13W Eff=78% EfcLed=107lm/W EfcLum=83lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	99 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.22	0.44	0.65	0.87	1.09	OC	0.22	0.44	0.65	0.87	1.09
OB	0.22	0.44	0.65	0.87	1.09	OD	0.22	0.44	0.65	0.87	1.09

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3958.42	3439.33	1516.02	550.30	146.73	25.64	0.44	0.00	0.00	0.00
OB	3958.42	3439.33	1516.02	550.30	146.73	25.64	0.44	0.00	0.00	0.00
OC	3958.42	3439.33	1516.02	550.30	146.73	25.64	0.44	0.00	0.00	0.00
OD	3958.42	3439.33	1516.02	550.30	146.73	25.64	0.44	0.00	0.00	0.00

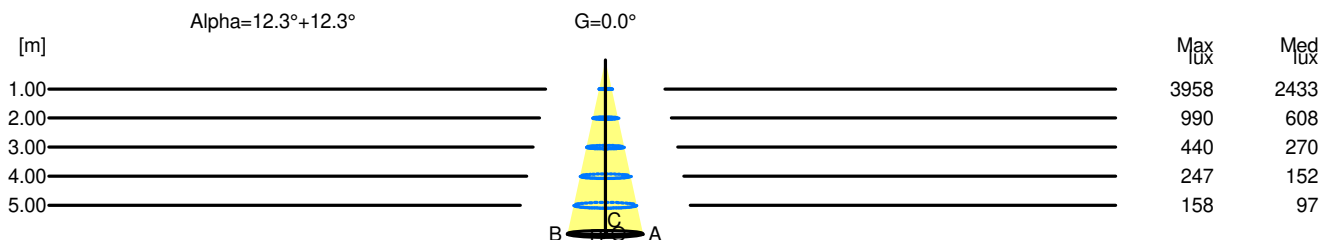

H[m]	D[m]	Max lux	Med lux	Alpha=12.3°+12.3°	G=0.0
1.00	0.44	3958	2433		
2.00	0.87	990	608		
3.00	1.31	440	270		
4.00	1.74	247	152		
5.00	2.18	158	97		