

Luminaire

Code M254065

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K SPOT CORNICE SILVER / DEFL. NERO


Measurem.

Code FTS1602200

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K SPOT CORNICE SILVER / DEFL. NERO

Luminaire Flux	850.68 lm	Luminaire Power	13.00 W	Efficacy	65.44 lm/W	Efficiency	100.00%
Sources Flux	850.68 lm	Maximum value	3972.52 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-06-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		850.68 lm	
LED Flux=1390lm LED Power=13W Eff=61,2% EfcLed=107lm/W EfcLum=65lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

80mm x 80mm




Semipiani C

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

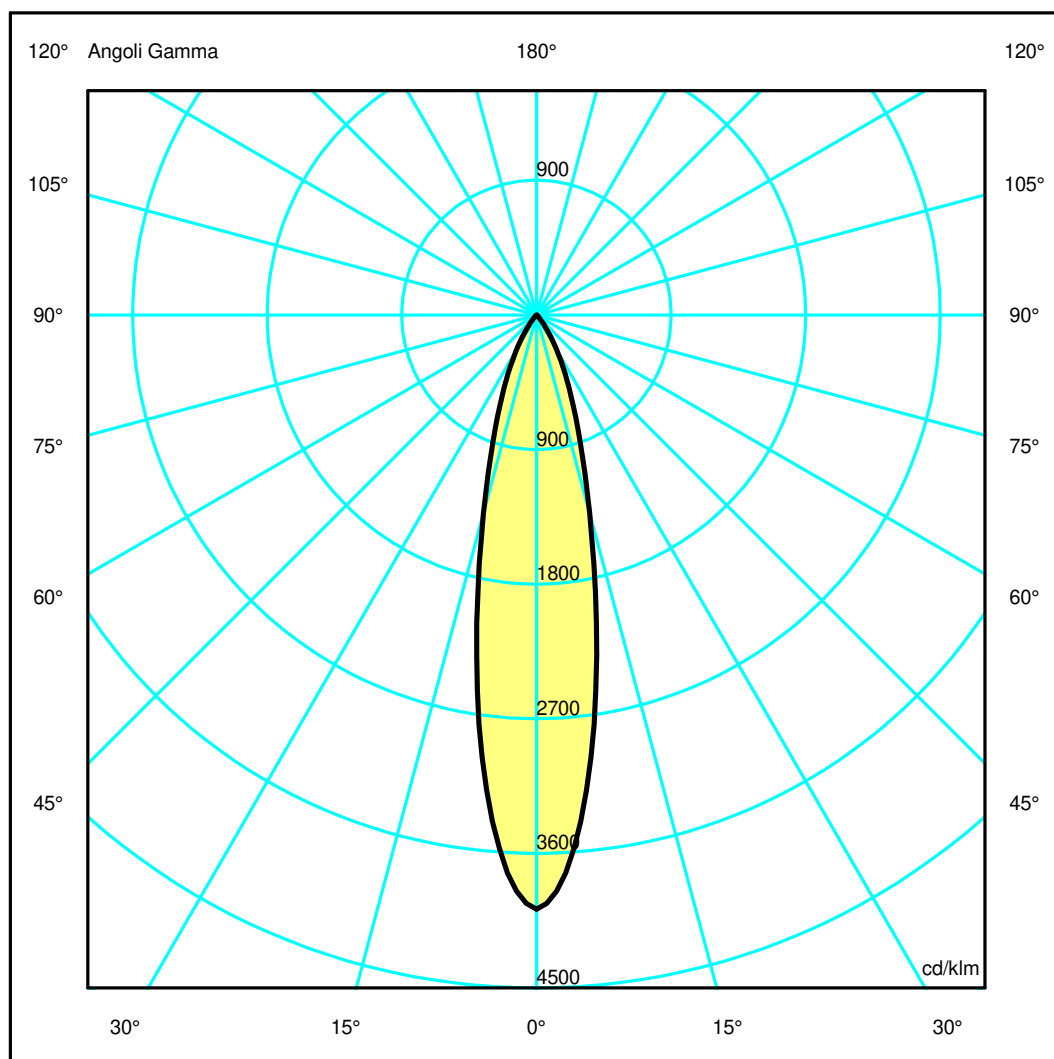

Luminaire


Code M254065
 Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K SPOT CORNICE SILVER / DEFL. NERO
Measurement.
 Code FTS1602200
 Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K SPOT CORNICE SILVER / DEFL. NERO

Luminaire Flux	850.68 lm	Luminaire Power	13.00 W	Efficacy	65.44 lm/W	Efficiency	100.00%
Sources Flux	850.68 lm	Maximum value	3972.52 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-06-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		850.68 lm	
LED Flux=1390lm LED Power=13W Eff=61,2% EfcLed=107lm/W EfcLum=65lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	99 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.20	0.41	0.61	0.82	1.02	OC	0.20	0.41	0.61	0.82	1.02
OB	0.20	0.41	0.61	0.82	1.02	OD	0.20	0.41	0.61	0.82	1.02

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3379.34	2891.67	1165.94	410.31	105.10	15.89	2.60	0.61	0.34	0.11
OB	3379.34	2891.67	1165.94	410.31	105.10	15.89	2.60	0.61	0.34	0.11
OC	3379.34	2891.67	1165.94	410.31	105.10	15.89	2.60	0.61	0.34	0.11
OD	3379.34	2891.67	1165.94	410.31	105.10	15.89	2.60	0.61	0.34	0.11

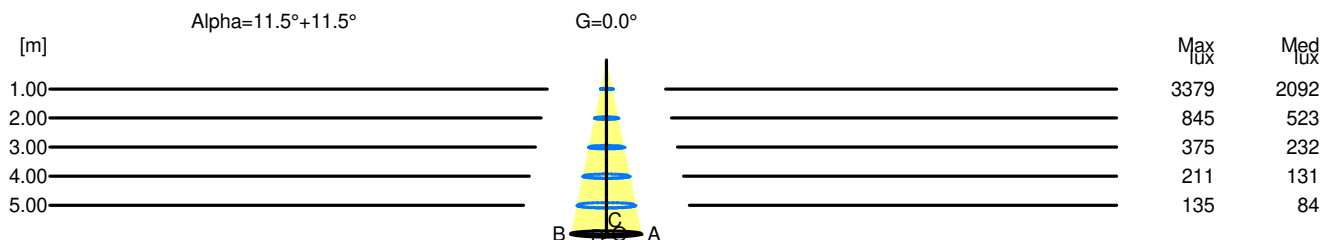

H[m]	D[m]	Max lux	Med lux	Alpha=11.5°+11.5°	G=0.0
1.00	0.41	3379	2092		
2.00	0.82	845	523		
3.00	1.22	375	232		
4.00	1.63	211	131		
5.00	2.04	135	84		