

Luminaire

Code M253625

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. BIANCO


Measurem.

Code FTS1602240

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	1048.06 lm	Luminaire Power	13.00 W	Efficacy	80.62 lm/W	Efficiency	100.00%
Sources Flux	1048.06 lm	Maximum value	2966.80 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1048.06 lm	
LED Flux=1390lm LED Power=13W Eff=75,4% EfcLed=107lm/W EfcLum=81lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	94 99 100 100 100			D DIN 5040		A60	
F UTE	1.00 A			B NBN		BZ 1	


80mm x 80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

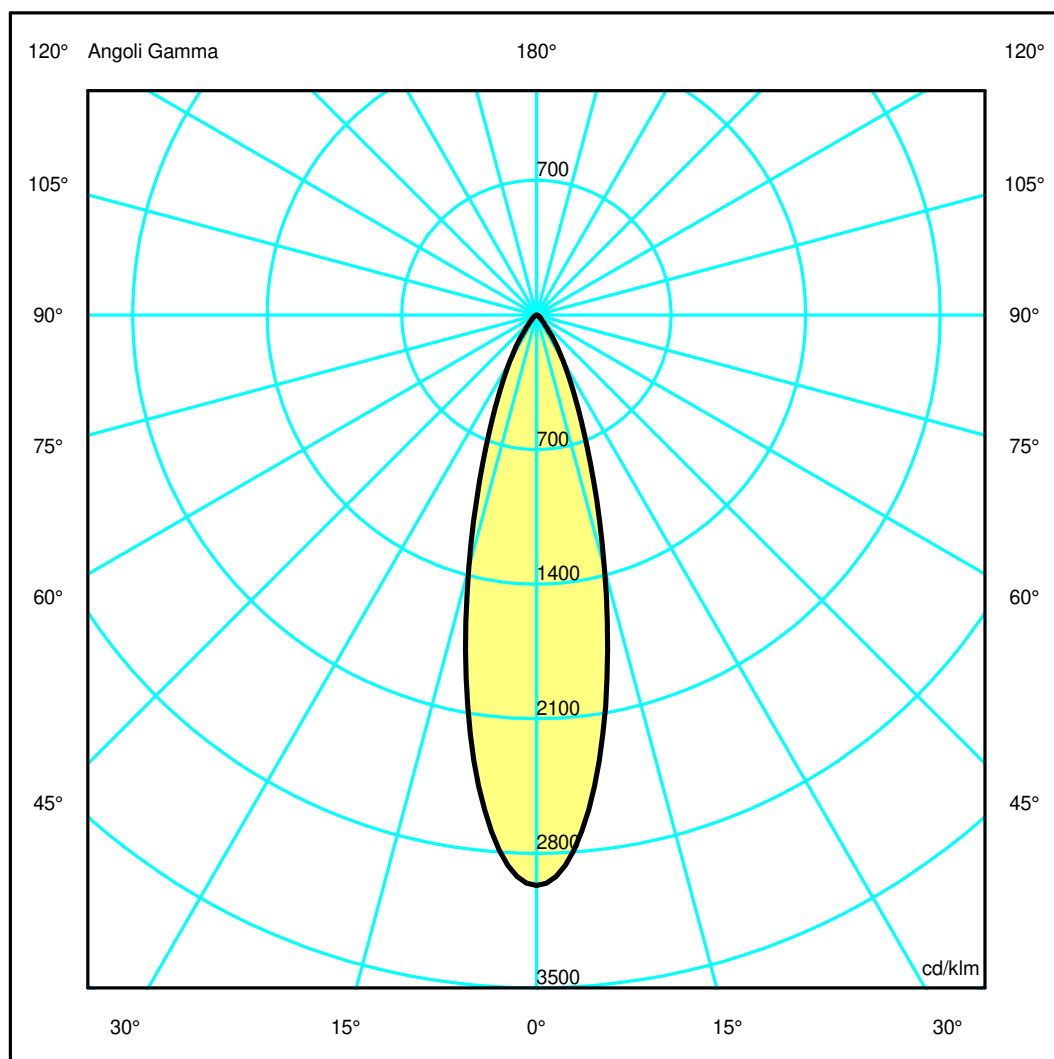

Luminaire

Code M253625

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. BIANCO

Measurem.

Code FTS1602240


Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	1048.06 lm	Luminaire Power	13.00 W	Efficacy	80.62 lm/W	Efficiency	100.00%
Sources Flux	1048.06 lm	Maximum value	2966.80 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1048.06 lm	
LED Flux=1390lm LED Power=13W Eff=75,4% EfcLed=107lm/W EfcLum=81lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	94 99 100 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.50	0.75	1.00	1.26	OC	0.25	0.50	0.75	1.00	1.26
OB	0.25	0.50	0.75	1.00	1.26	OD	0.25	0.50	0.75	1.00	1.26

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3109.38	2824.93	1429.64	500.09	158.41	43.43	22.37	11.59	3.05	0.00
OB	3109.38	2824.93	1429.64	500.09	158.41	43.43	22.37	11.59	3.05	0.00
OC	3109.38	2824.93	1429.64	500.09	158.41	43.43	22.37	11.59	3.05	0.00
OD	3109.38	2824.93	1429.64	500.09	158.41	43.43	22.37	11.59	3.05	0.00

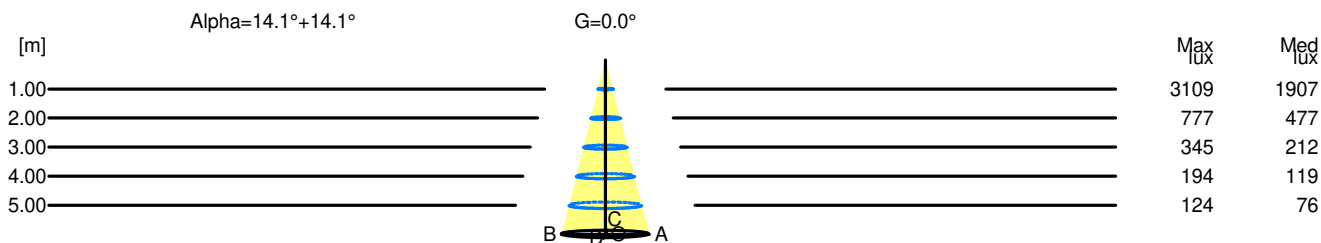

H[m]	D[m]	Max lux	Med lux	Alpha=14.1°+14.1°	G=0.0
1.00	0.50	3109	1907		
2.00	1.00	777	477		
3.00	1.51	345	212		
4.00	2.01	194	119		
5.00	2.51	124	76		