

Luminaire

Code M273825
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Measurem.

Code FTS1602228
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Luminaire Flux	1018.87 lm	Luminaire Power	13.00 W	Efficacy	78.37 lm/W	Efficiency	100.00%
Sources Flux	1018.87 lm	Maximum value	2741.50 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		09-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1018.87 lm	
LED Flux=1390lm LED Power=13W Eff=73,3% EfcLed=107lm/W EfcLum=78lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	97	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1


80mm x 80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

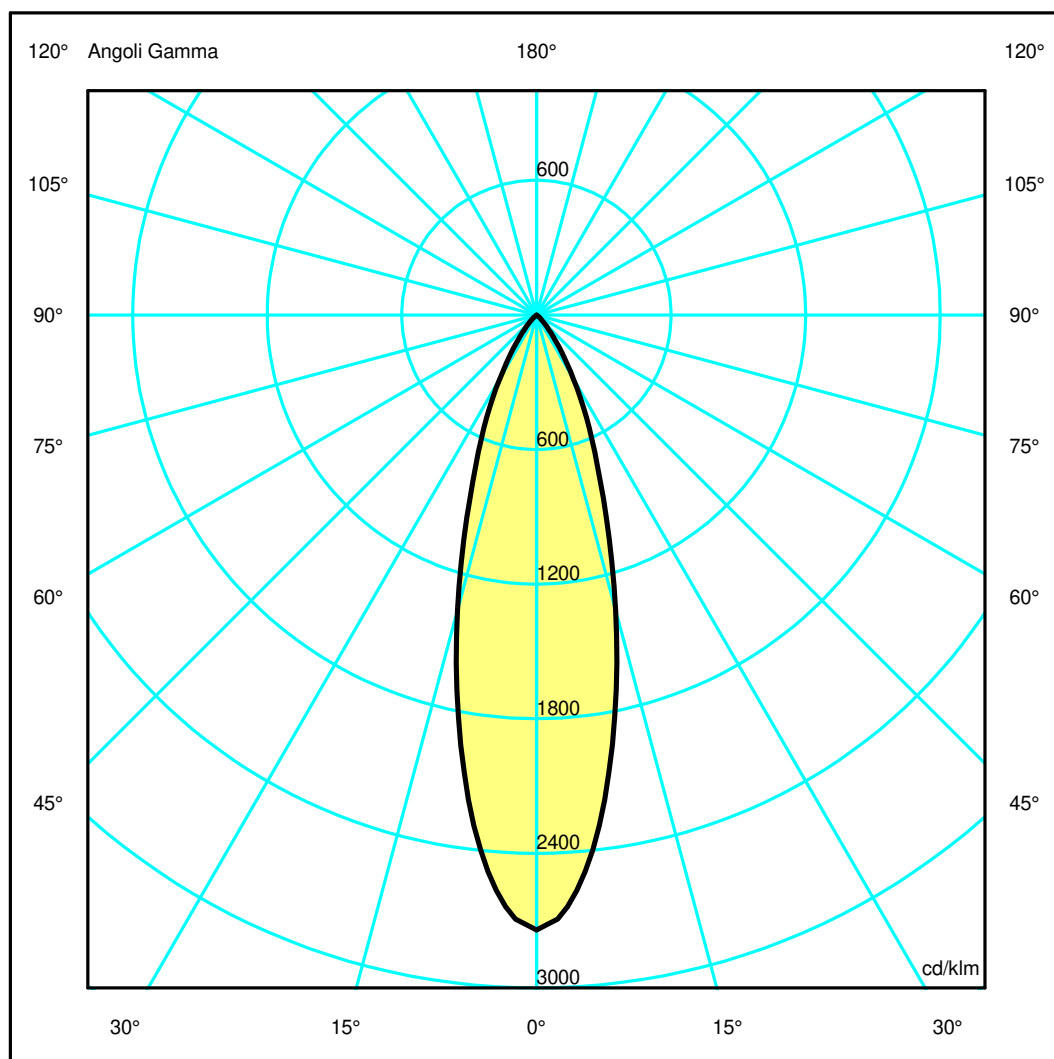

Luminaire

Code M273825
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Measurem.


Code FTS1602228
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Luminaire Flux	1018.87 lm	Luminaire Power	13.00 W	Efficacy	78.37 lm/W	Efficiency	100.00%
Sources Flux	1018.87 lm	Maximum value	2741.50 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		09-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1018.87 lm	
LED Flux=1390lm LED Power=13W Eff=73,3% EfcLed=107lm/W EfcLum=78lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	97 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.27	0.53	0.80	1.07	1.33	OC	0.27	0.53	0.80	1.07	1.33
OB	0.27	0.53	0.80	1.07	1.33	OD	0.27	0.53	0.80	1.07	1.33

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2793.23	2535.99	1387.52	566.94	179.18	41.33	1.28	0.00	0.00	0.00
OB	2793.23	2535.99	1387.52	566.94	179.18	41.33	1.28	0.00	0.00	0.00
OC	2793.23	2535.99	1387.52	566.94	179.18	41.33	1.28	0.00	0.00	0.00
OD	2793.23	2535.99	1387.52	566.94	179.18	41.33	1.28	0.00	0.00	0.00

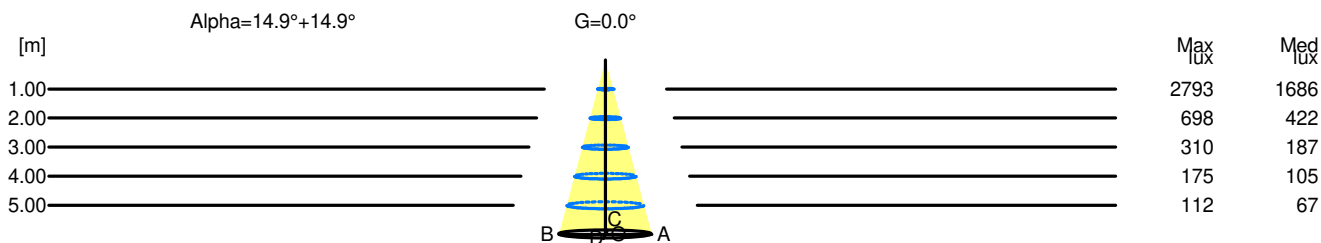

H[m]	D[m]	Max lux	Med lux	Alpha=14.9°+14.9°	G=0.0
1.00	0.53	2793	1686		
2.00	1.07	698	422		
3.00	1.60	310	187		
4.00	2.13	175	105		
5.00	2.66	112	67		