Luminaire
Code M254265
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE SILVER / DEFL. NERO
Measurem.
Code FTS1602236
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE SILVER / DEFL. NERO

Luminaire Flux	846.51 lm	Luminaire Power	13.00 W	Efficacy	65.12 lm/W	Efficiency	100.00%
Sources Flux	846.51 lm	Maximum value	3301.84 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Rectangular Luminaire	Length	80 mm	Width	80 mm	Height 115 mm
Round Luminous Area	Diam.	50 mm	Height	0 mm	
Horizontal Luminous Area	0.001963 m2		Emitting area on Plane 180°	0.000000 m2	
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2	
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.000475 m2	
Coordinate system	CG		Symmetry Type	Rotosymmetrical	
Date	30-06-2015		Maximum Gamma Angle	90	
Measurement Distance	0.00		Measurement Flux	846.51 lm	

LED Flux=1390lm LED Power=13W Eff=60,9% EfcLed=107lm/W EfcLum=65lm/W Ra=90 SDCM=3 L70(6K)=50000h

C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

80mm x 80mm



Semipiani C

180.0 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

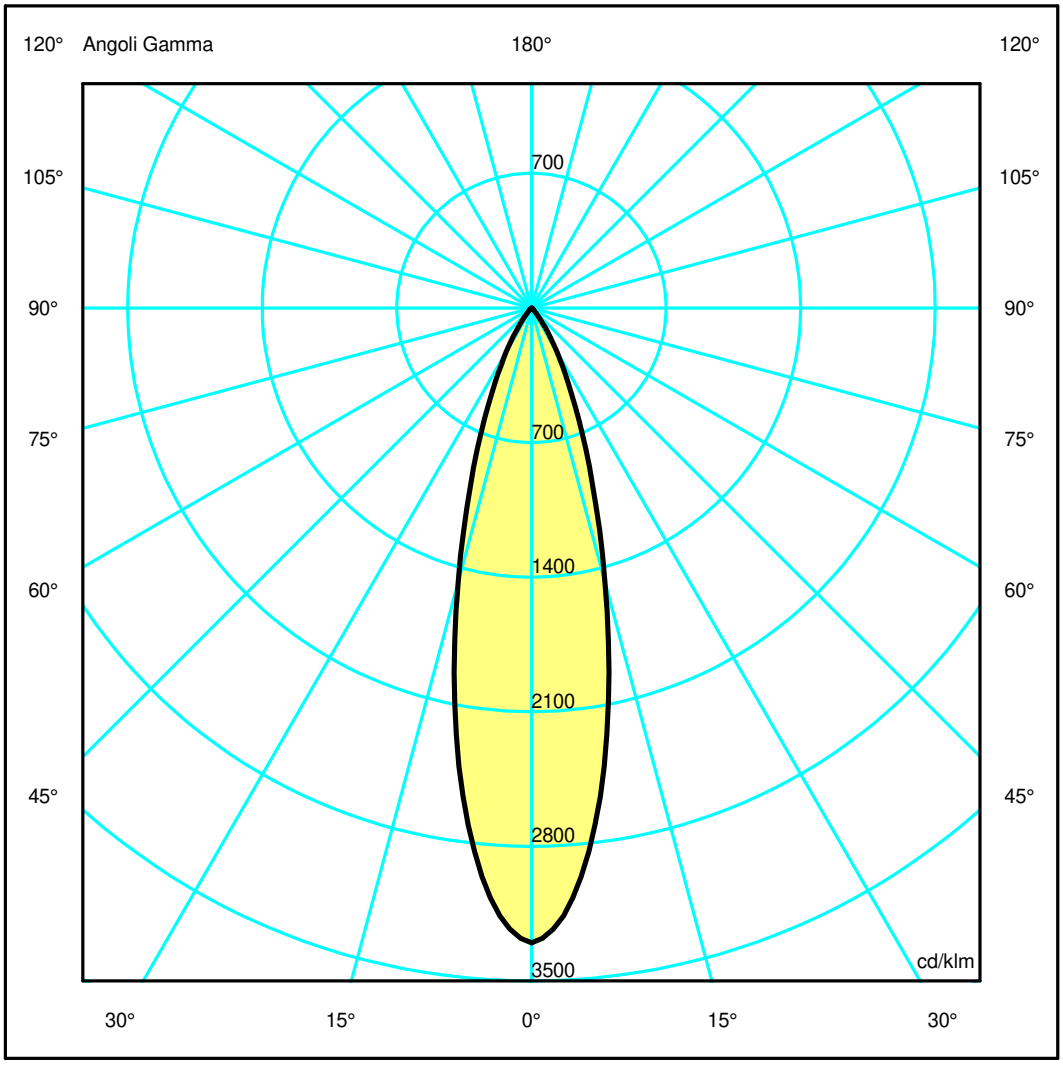

Luminaire
Code M254265
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE SILVER / DEFL. NERO
Measurem.
Code FTS1602236
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE SILVER / DEFL. NERO

Luminaire Flux	846.51 lm	Luminaire Power	13.00 W	Efficacy	65.12 lm/W	Efficiency	100.00%
Sources Flux	846.51 lm	Maximum value	3301.84 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Rectangular Luminaire	Length	80 mm	Width	80 mm	Height 115 mm
Round Luminous Area	Diam.	50 mm	Height	0 mm	
Horizontal Luminous Area	0.001963 m2		Emitting area on Plane 180°	0.000000 m2	
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2	
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.000475 m2	
Coordinate system	CG		Symmetry Type	Rotosymmetrical	
Date	30-06-2015		Maximum Gamma Angle	90	
Measurement Distance	0.00		Measurement Flux	846.51 lm	

LED Flux=1390lm LED Power=13W Eff=60,9% EfcLed=107lm/W EfcLum=65lm/W Ra=90 SDCM=3 L70(6K)=50000h

C.I.E.	99 100 100 100 100	D DIN 5040	A60
F UTE	--	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.49	0.74	0.98	1.23	OC	0.25	0.49	0.74	0.98	1.23
OB	0.25	0.49	0.74	0.98	1.23	OD	0.25	0.49	0.74	0.98	1.23

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	2795.04	2512.59	1245.80	418.05	104.27	14.64	2.66	0.61	0.35	0.12
OB	2795.04	2512.59	1245.80	418.05	104.27	14.64	2.66	0.61	0.35	0.12
OC	2795.04	2512.59	1245.80	418.05	104.27	14.64	2.66	0.61	0.35	0.12
OD	2795.04	2512.59	1245.80	418.05	104.27	14.64	2.66	0.61	0.35	0.12

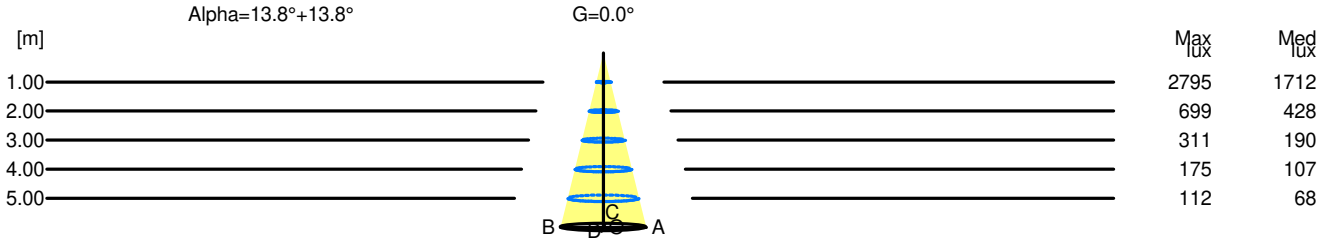
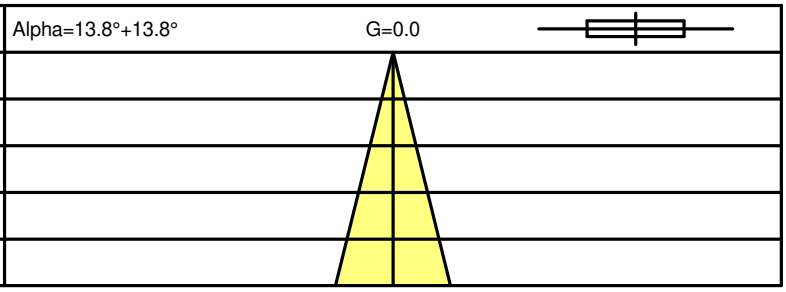
H[m]	D[m]	Max lux	Med lux
1.00	0.49	2795	1712
2.00	0.98	699	428
3.00	1.47	311	190
4.00	1.97	175	107
5.00	2.46	112	68