


Luminaire

Code M263665
 Name EVERYTHING 150 QUADRATO TRIM ORIENTABILE LED FLOOD CORNICE GRIGIO / DEFL. METALIZZATO 3000K
Measurement.
 Code FTS1602483
 Name EVERYTHING 150 QUADRATO TRIM ORIENTABILE LED FLOOD CORNICE GRIGIO / DEFL. METALIZZATO 3000K

Luminaire Flux	2431.44 lm	Luminaire Power	24.00 W	Efficacy	101.31 lm/W	Efficiency	100.00%
Sources Flux	2431.44 lm	Maximum value	5207.68 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	150 mm	Height	137 mm		
Round Luminous Area		Diam.	120 mm	Height	0 mm		
Horizontal Luminous Area		0.011310 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002736 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		11-03-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		2431.44 lm	
LED Flux=2763lm LED Power=24W Eff=88% EfcLed=115lm/W EfcLum=101lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1


Diam=150mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR100.00 %
 RN 0.00 %

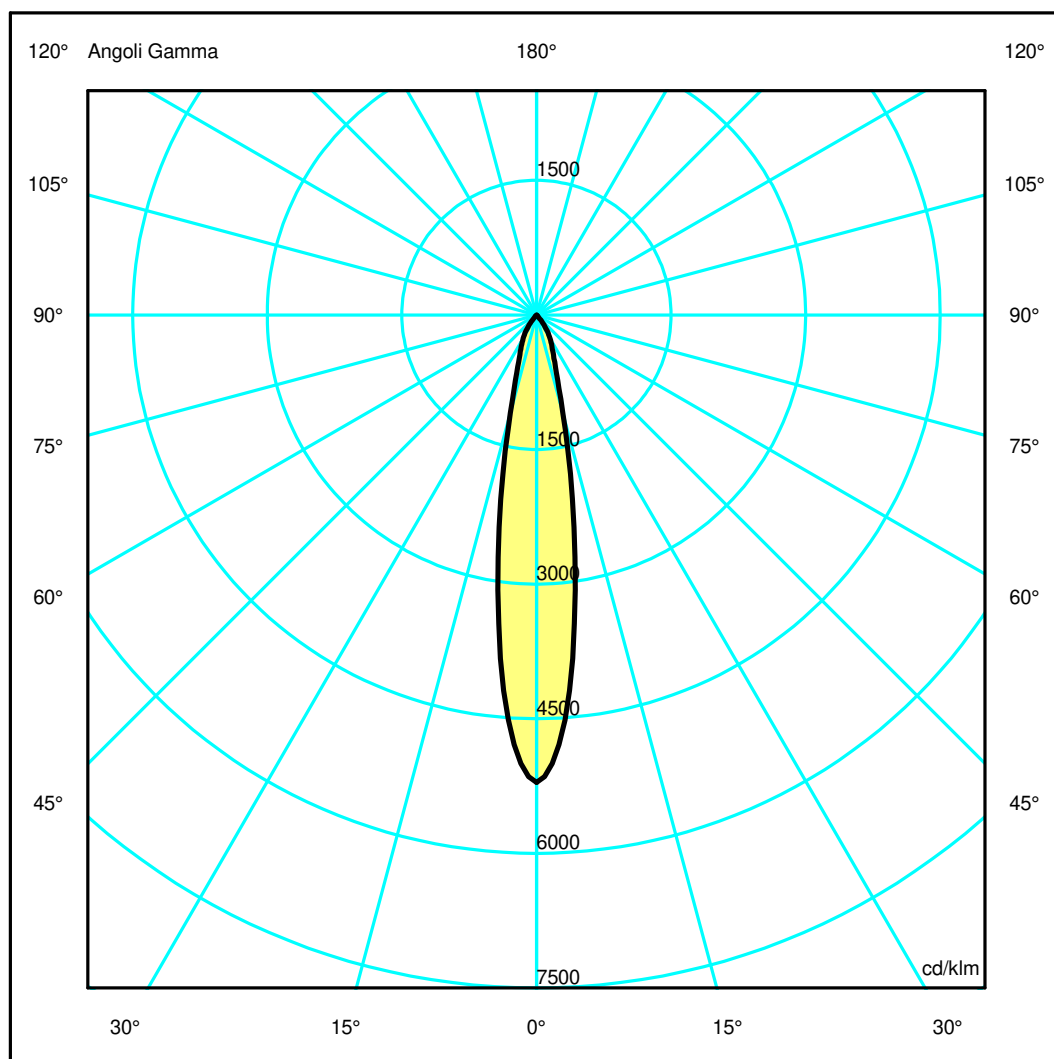

Luminaire


Code M263665
 Name EVERYTHING 150 QUADRATO TRIM ORIENTABILE LED FLOOD CORNICE GRIGIO / DEFL. METALIZZATO 3000K
Measurement.
 Code FTS1602483
 Name EVERYTHING 150 QUADRATO TRIM ORIENTABILE LED FLOOD CORNICE GRIGIO / DEFL. METALIZZATO 3000K

Luminaire Flux	2431.44 lm	Luminaire Power	24.00 W	Efficacy	101.31 lm/W	Efficiency	100.00%
Sources Flux	2431.44 lm	Maximum value	5207.68 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Round Luminaire		Diam.	150 mm	Height	137 mm		
Round Luminous Area		Diam.	120 mm	Height	0 mm		
Horizontal Luminous Area		0.011310 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002736 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		11-03-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		2431.44 lm	
LED Flux=2763lm LED Power=24W Eff=88% EfcLed=115lm/W EfcLum=101lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.17	0.33	0.50	0.66	0.83	OC	0.17	0.33	0.50	0.66	0.83
OB	0.17	0.33	0.50	0.66	0.83	OD	0.17	0.33	0.50	0.66	0.83

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	12662.16	10212.94	2746.32	1011.55	443.19	33.80	6.15	0.00	0.00	0.00
OB	12662.16	10212.94	2746.32	1011.55	443.19	33.80	6.15	0.00	0.00	0.00
OC	12662.16	10212.94	2746.32	1011.55	443.19	33.80	6.15	0.00	0.00	0.00
OD	12662.16	10212.94	2746.32	1011.55	443.19	33.80	6.15	0.00	0.00	0.00

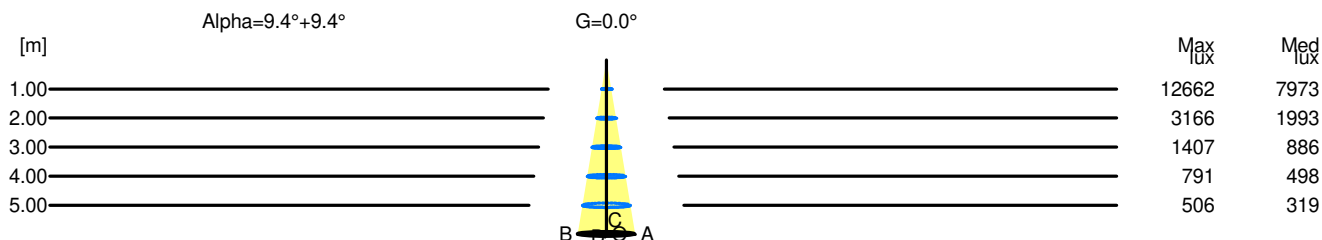

H[m]	D[m]	Max lux	Med lux	Alpha=9.4°+9.4°	G=0.0
1.00	0.33	12662	7973		
2.00	0.66	3166	1993		
3.00	0.99	1407	886		
4.00	1.32	791	498		
5.00	1.65	506	319		