


Luminaire

Code M3004W61
Name GRAFA SYSTEM 600X600 CABLAGGIO ANGOLARE 3000K DIMMER


Measurem.

Code FTS1601351
Name GRAFA SYSTEM 600X600 CABLAGGIO ANGOLARE 3000K DIMMER

Luminaire Flux	3400.25 lm	Luminaire Power	39.00 W	Efficacy	87.19 lm/W	Efficiency	100.00%
Lamps Flux	3400.25 lm	Maximum value	352.80 cd/klm	Position	C=55.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	600 mm	Width	600 mm	Height	20 mm
Rectangular Luminous Area		Length	574 mm	Width	574 mm	Height	0 mm
Horizontal Luminous Area		0.329476 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.079707 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		05-05-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3400.25 lm	
LED Flux=3864lm LED Power=32,5W Eff=88% EfcLed=119lm/W EfcLum=87lm/W Ra=80 SDCM=2 L70(6K)=50000							
C.I.E.	65 88 97 61 100			D DIN 5040		B51	
F UTE	0.61 C + 0.39 T			B NBN		BZ 2 / 1 / BZ 3	



ULOR 39.05 %
DLOR 60.95 %
RN 39.05 %

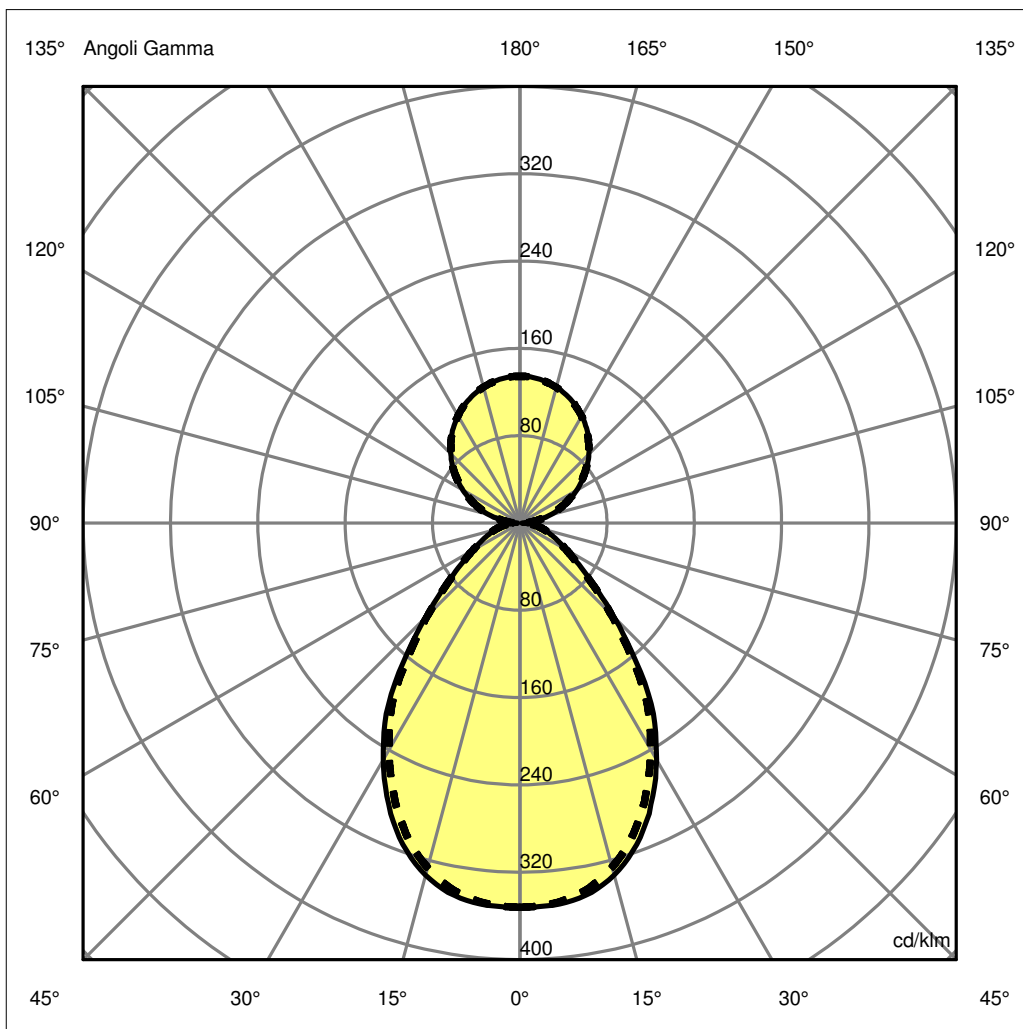

Luminaire

Code M3004W61
Name GRAFA SYSTEM 600X600 CABLAGGIO ANGOLARE 3000K DIMMER

Measurerm.


Code FTS1601351
Name GRAFA SYSTEM 600X600 CABLAGGIO ANGOLARE 3000K DIMMER

Luminaire Flux	3400.25 lm	Luminaire Power	39.00 W	Efficacy	87.19 lm/W	Efficiency	100.00%
Lamps Flux	3400.25 lm	Maximum value	352.80 cd/klm	Position	C=55.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	600 mm	Width	600 mm	Height	20 mm
Rectangular Luminous Area		Length	574 mm	Width	574 mm	Height	0 mm
Horizontal Luminous Area		0.329476 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.079707 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		05-05-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3400.25 lm	
LED Flux=3864lm LED Power=32,5W Eff=88% EfcLed=119lm/W EfcLum=87lm/W Ra=80 SDCM=2 L70(6K)=50000							
C.I.E.	65 88 97 61 100			D DIN 5040	B51		
F UTE	0.61 C + 0.39 T			B NBN	BZ 2 / 1 / BZ 3		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.81	1.62	2.43	3.24	4.05	OC	0.79	1.57	2.36	3.15	3.93
OB	0.81	1.62	2.43	3.24	4.05	OD	0.79	1.57	2.36	3.15	3.93

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1197.14	1194.52	1135.45	966.35	725.78	417.10	224.04	131.46	78.81	34.37
OB	1197.14	1194.52	1135.45	966.35	725.78	417.10	224.04	131.46	78.81	34.37
OC	1197.14	1189.95	1110.92	929.94	694.42	402.83	219.58	131.78	78.74	33.11
OD	1197.14	1189.95	1110.92	929.94	694.42	402.83	219.58	131.78	78.74	33.11

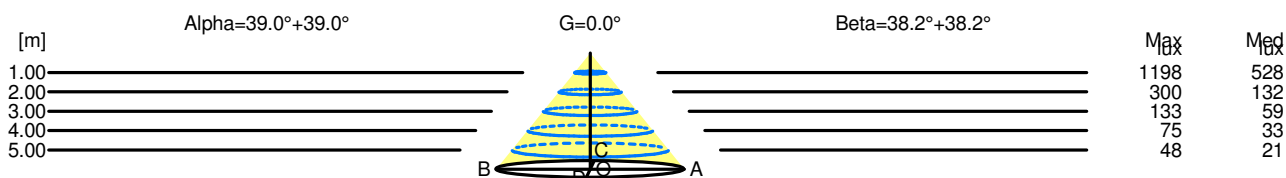

H[m]	D[m]	Max lux	Med lux	Alpha=39.0°+39.0°	G=0.0
1.00	1.62	1198	528		
2.00	3.24	300	132		
3.00	4.86	133	59		
4.00	6.47	75	33		
5.00	8.09	48	21		

H[m]	D[m]	Max lux	Med lux	Beta=38.2°+38.2°	G=0.0
1.00	1.57	1198	528		
2.00	3.15	300	132		
3.00	4.72	133	59		
4.00	6.29	75	33		
5.00	7.87	48	21		

Luminaire

Code M3004W61
Name GRAFA SYSTEM 600X600 CABLAGGIO ANGOLARE 3000K DIMMER

Measur.

Code FTS1601351
Name GRAFA SYSTEM 600X600 CABLAGGIO ANGOLARE 3000K DIMMER

Luminaire Flux	3400.25 lm	Luminaire Power	39.00 W	Efficacy	87.19 lm/W	Efficiency	100.00%
Lamps Flux	3400.25 lm	Maximum value	352.80 cd/klm	Position	C=55.00 G=1.00	CG	Double Symmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	9.6	10.4	10.3	11.1	11.9	9.5	10.2	10.2	11.0	11.9
x=2H y=3H	10.5	11.2	11.3	12.0	12.9	10.4	11.1	11.2	11.9	12.9
x=2H y=4H	11.0	11.7	11.8	12.5	13.4	10.9	11.6	11.8	12.4	13.4
x=2H y=6H	11.5	12.1	12.4	12.9	13.9	11.4	12.0	12.3	12.9	13.9
x=2H y=8H	11.7	12.3	12.6	13.1	14.1	11.7	12.2	12.5	13.1	14.1
x=2H y=12H	12.0	12.5	12.8	13.3	14.3	11.9	12.4	12.7	13.3	14.3
x=4H y=2H	9.9	10.5	10.7	11.3	12.2	9.8	10.4	10.6	11.2	12.2
x=4H y=3H	11.0	11.6	11.9	12.4	13.4	11.0	11.5	11.8	12.3	13.4
x=4H y=4H	11.7	12.2	12.6	13.0	14.0	11.6	12.1	12.5	13.0	14.0
x=4H y=6H	12.4	12.8	13.3	13.7	14.7	12.3	12.7	13.2	13.6	14.7
x=4H y=8H	12.7	13.1	13.6	13.9	15.0	12.6	13.0	13.5	13.9	15.0
x=4H y=12H	13.0	13.3	13.9	14.2	15.2	12.9	13.2	13.8	14.1	15.2
x=8H y=4H	12.0	12.3	12.9	13.2	14.3	11.9	12.3	12.8	13.1	14.3
x=8H y=6H	12.8	13.1	13.7	14.0	15.1	12.7	13.0	13.7	14.0	15.1
x=8H y=8H	13.2	13.5	14.2	14.4	15.5	13.2	13.4	14.1	14.3	15.5
x=8H y=12H	13.6	13.8	14.5	14.8	15.9	13.5	13.7	14.5	14.7	15.9
x=12H y=4H	12.0	12.3	12.9	13.2	14.3	11.9	12.2	12.8	13.1	14.3
x=12H y=6H	12.9	13.1	13.8	14.1	15.2	12.8	13.1	13.8	14.0	15.2
x=12H y=8H	13.3	13.6	14.3	14.5	15.6	13.3	13.5	14.2	14.5	15.6